



## CANADIAN FOODSERVICE EQUIPMENT - SUPPLEMENTAL PRICE LIST

### Pass-Through Pickup Pod™

Hatco's heated or ambient Pass-Through Pickup Pod™, propelled by Minnow™, helps automate customer and delivery pickups. These self-service, touchless pickup solutions reduce lobby/dining area congestion. They eliminate pickup mistakes, reduce labor costs, and improve the takeout experience for all. As a pass-through unit, the operator can easily fill orders from the back of the house to help streamline the delivery process, and customers and delivery people simply access their reserved cubbies by scanning the QR code or using the embedded link sent via SMS. All of this is done without waiting in line or needing to ask for help from front of house staff. Unlike unsecure tables, the Pass-Through Pickup Pod keeps food fresh and secure until ready to be picked up.

- Available in either heated or ambient styles with eight unit pods
- Heated units are thermostatically controlled with an operational range of 140°F to 185°F
- Heated pods may also be operated in Ambient Mode
- Offers customers and delivery workers a touchless experience via their own devices with QR code and SMS messaging
- Energy-saving 5000K LED cubby lighting showcases food
- Each individual pod is 13.58" W x 20.64" D x 14.5" H
- The antimicrobial surfaces and touchless interface work in tandem to inhibit the spread of bacteria, mildew and germs
- Plug into a standard 120V outlet and units are ADA compliant
- Has rear door handles which allow for minimal contact and easy access
- Connects via Cellular, WiFi, or CAT-5/6

**MPP-8HPT**  
Pass-Through  
unit (Operator  
side shown)



**MPP-8HPT**  
Pass-Through  
unit (Customer  
side shown)



#### PASS-THROUGH PICKUP POD



Model	Number of Lockers	Model Dimensions (W x D x H)	Internal Locker Dimensions (W x D x H)	Voltage	Watts	Amps	Plug	Approx. Ship Weight	List Price
<b>Ambient</b>									
<b>MPP-8PT</b>	8 Lockers	32 <sup>7</sup> / <sub>32</sub> " x 24" x 80 <sup>17</sup> / <sub>32</sub> "	13 <sup>19</sup> / <sub>32</sub> " x 20 <sup>41</sup> / <sub>64</sub> " x 14 <sup>1</sup> / <sub>2</sub> "	120	90	0.4	NEMA 5-15P	390 lbs.	<b>\$23732</b>
<b>Heated</b>									
<b>MPP-8HPT</b>	8 Lockers	32 <sup>7</sup> / <sub>32</sub> " x 24" x 80 <sup>17</sup> / <sub>32</sub> "	13 <sup>19</sup> / <sub>32</sub> " x 20 <sup>41</sup> / <sub>64</sub> " x 14 <sup>1</sup> / <sub>2</sub> "	120	1424	11.87	NEMA 5-15P	390 lbs.	<b>\$29384</b>

Cord Location: Operator side, bottom left.

#### OPTIONS (available at time of purchase only)

**Designer Colors – Non-standard colors are non-returnable – Charcoal standard –**

<b>BRONZE</b>	Bronze	<b>No Charge</b>
<b>PVCWHITE</b>	White	<b>No Charge</b>




## Bezel Gasket Option for Heated Wells

A new, factory-installed rubber gasket, now available for select Heated Wells, eliminates the need for silicone or other sealants.


### HWBI-3

Available with an optional gasket



### BEZELGASKET-1

Factory-installed option (eliminates the need for silicone or other sealants)

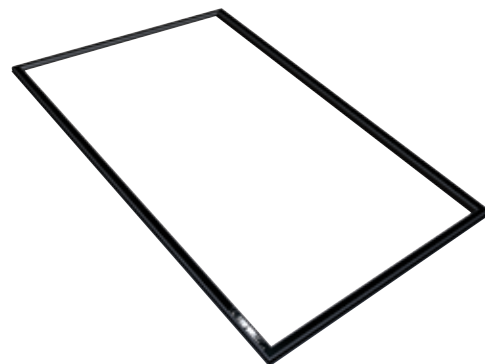

The following Bezel Gaskets are available for use on these Heated Wells:

BEZELGASKET-1				BEZELGASKET-2				BEZELGASKET-3			
• HWBI-1	• HWBLI-1	• HWBI43-1	• DHWBI-1	• HWBI-2	• HWBLI-2	• HWBI43-2	• DHWBI-2	• HWBI-3	• HWBLI-3	• HWBI43-3	• DHWBI-3
• HWBI-1D	• HWBLI-1D	• HWBI43-1D		• HWBI-2D	• HWBLI-2D	• HWBI43-2D		• HWBI-3D	• HWBLI-3D	• HWBI43-3D	
• HWBI-1DA	• HWBLI-1DA	• HWBI43-1DA		• HWBI-2DA	• HWBLI-2DA	• HWBI43-2DA		• HWBI-3DA	• HWBLI-3DA	• HWBI43-3DA	
				• HWBI-2M	• HWBLI-2M	• HWBI43-2M		• HWBI-3M	• HWBLI-3M	• HWBI43-3M	
				• HWBI-2MA	• HWBLI-2MA	• HWBI43-2MA		• HWBI-3MA	• HWBLI-3MA	• HWBI43-3MA	
BEZELGASKET-4				BEZELGASKET-5				BEZELGASKET-6			
• HWBI-4	• HWBLI-4	• HWBI43-4	• DHWBI-4	• HWBI-5	• HWBLI-5	• HWBI43-5	• DHWBI-5	• HWBI-6	• HWBLI-6	• HWBI43-6	• DHWBI-6
• HWBI-4D	• HWBLI-4D	• HWBI43-4D		• HWBI-5D	• HWBLI-5D	• HWBI43-5D		• HWBI-6D	• HWBLI-6D	• HWBI43-6D	
• HWBI-4DA	• HWBLI-4DA	• HWBI43-4DA		• HWBI-5DA	• HWBLI-5DA	• HWBI43-5DA		• HWBI-6DA	• HWBLI-6DA	• HWBI43-6DA	
• HWBI-4M	• HWBLI-4M	• HWBI43-4M		• HWBI-5M	• HWBLI-5M	• HWBI43-5M		• HWBI-6M	• HWBLI-6M	• HWBI43-6M	
• HWBI-4MA	• HWBLI-4MA	• HWBI43-4MA		• HWBI-5MA	• HWBLI-5MA	• HWBI43-5MA		• HWBI-6MA	• HWBLI-6MA	• HWBI43-6MA	
BEZELGASKET-S2				BEZELGASKET-S3				BEZELGASKET-S4			
• HWBI-S2	• HWBI-S2M	• DHWBI-S2		• HWBI-S3	• HWBI-S3M	• DHWBI-S3		• HWBI-S4	• HWBI-S4M	• DHWBI-S4	
• HWBI-S2D	• HWBI-S2MA			• HWBI-S3D	• HWBI-S3MA			• HWBI-S4D	• HWBI-S4MA		
• HWBI-S2DA				• HWBI-S3DA				• HWBI-S4DA			

### OPTIONS (available at time of purchase only)

#### Factory-Installed Rubber Gasket for Drop-In Heated Wells —

BEZELGASKET-1	\$ 121
BEZELGASKET-2	121
BEZELGASKET-3	158
BEZELGASKET-4	158
BEZELGASKET-5	170
BEZELGASKET-6	170

#### Factory-Installed Rubber Gasket for Drop-In Slim Heated Wells —

BEZELGASKET-S2	\$ 121
BEZELGASKET-S3	158
BEZELGASKET-S4	158

## R-290 Refrigerated Drop-In Wells

Hatco's R-290 Refrigerated Drop-In Well is a full-size unit that uses an environmentally friendly R-290 refrigerant to blanket your pre-chilled food product to retain optimum freshness and taste in one efficient and easy operation – a winner for your foodservice operation.

- Full-size, insulated wells available in 1- to 6-pan configurations
- NSF 7 Component approved cold wall construction keeping food cold without drying it out
- Electronic control assembly can be mounted on either side of the condensing unit or remotely mounted up to 4 feet

- Auto-defrost is activated through an advanced electronic controller programmed at the customer location
- Optimal insulation on sides and bottom to ensure better cold retention. Environmentally friendly insulation used throughout
- 1" brass drain simplifies cleaning



CWBP-6 with accessory food pans and pan support bars

CWBP-2 with slant option CWBP-2SLANT



### R-290 REFRIGERATED DROP-IN WELLS

Model	Dimensions W x D x H	Voltage	HP and Watts @ 60 Hz			Approx. Ship Weight	List Price
			HP	Watts	Plug		
CWBP-1	19" x 27" x 32 $\frac{1}{10}$ "	120	$\frac{1}{6}$	345	NEMA 5-15P	127 lbs.	\$ 9861
CWBP-2	32" x 27" x 32 $\frac{1}{10}$ "	120	$\frac{1}{6}$	345	NEMA 5-15P	150 lbs.	10425
CWBP-3	45" x 27" x 25 $\frac{1}{2}$ "	120	$\frac{1}{6}$	345	NEMA 5-15P	173 lbs.	11102
CWBP-4	58" x 27" x 25 $\frac{1}{2}$ "	120	$\frac{1}{3}$	440	NEMA 5-15P	211 lbs.	12079
CWBP-5	71" x 27" x 25 $\frac{1}{2}$ "	120	$\frac{1}{2}$	560	NEMA 5-15P	245 lbs.	12769
CWBP-6	84" x 27" x 25 $\frac{1}{2}$ "	120	$\frac{1}{2}$	560	NEMA 5-15P	292 lbs.	13927


#### All Refrigerated Drop-In Well Models Feature:

Voltage: Single phase.

Models Shipped with: Electronic temperature control, pan support bars for full-size pans, condensing unit, auto-defrost and filter-drier. Consult factory for refrigerant specifications.


**NOTE:** The installation kit, including the intake bracket, duct clamp, flexible duct, and duct collar, will be shipped separately.

#### Slant Option for: CWBP-1, -2, -3, -4, -5, -6

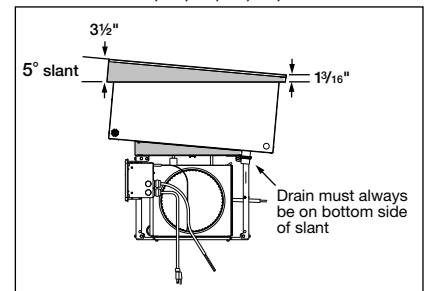



#### OPTIONS (available at time of purchase only)

EWC	Additional Four Year Parts Only Warranty on the Compressor	\$260
<b>Slant Options –</b>		
CWBP-1SLANT	Slant Option for CWBP-1	\$496
CWBP-2SLANT	Slant Option for CWBP-2	525
CWBP-3SLANT	Slant Option for CWBP-3	555
CWBP-4SLANT	Slant Option for CWBP-4	583
CWBP-5SLANT	Slant Option for CWBP-5	613
CWBP-6SLANT	Slant Option for CWBP-6	642
<b>Gasket Options –</b>		
BEZELGASKET-1	Factory installed for CWBP-1	\$121
BEZELGASKET-2	Factory installed for CWBP-2	121
BEZELGASKET-3	Factory installed for CWBP-3	158
BEZELGASKET-4	Factory installed for CWBP-4	158
BEZELGASKET-5	Factory installed for CWBP-5	170
BEZELGASKET-6	Factory installed for CWBP-6	170



#### BEZELGASKET-1

Factory installed option (eliminates the need for silicone or other sealants)





## R-290 Refrigerated Slim Drop-In Wells

Hatco's R-290 Refrigerated Slim Drop-In Well is a full-size unit that uses an environmentally friendly R-290 refrigerant to blanket your pre-chilled food product to retain optimum freshness and taste in one efficient and easy operation – but placed lengthwise. This provides customers with a complete cold well within easy reach, regardless of the sneeze guards.

- Insulated wells available in 1 to 4 full-size pan configurations
- NSF 7 Component approved cold wall construction keeping food product cold without drying it out
- Auto-defrost is activated through an advanced electronic controller programmed at customer location
- Optimal insulation on sides and bottom ensure better cold retention
- 1" brass drain simplifies cleaning



**CWBP-S4**  
with accessory (hotel)  
food pans and additional  
pan support bars

### REFRIGERATED SLIM DROP-IN WELLS

Model	Dimensions W x D x H	HP and Watts @ 60 Hz			Approx. Ship Weight	List Price
		HP	Watts	Plug		
CWBP-S1	27 <sup>1</sup> / <sub>16</sub> " x 19" x 26 <sup>1</sup> / <sub>16</sub> "	1/5	345	NEMA 5-15P	133 lbs.	\$ 9667
CWBP-S2	48 <sup>1</sup> / <sub>16</sub> " x 19" x 26 <sup>1</sup> / <sub>16</sub> "	1/5	345	NEMA 5-15P	170 lbs.	10844
CWBP-S3	69 <sup>3</sup> / <sub>16</sub> " x 19" x 26 <sup>1</sup> / <sub>16</sub> "	1/3	440	NEMA 5-15P	221 lbs.	12360
CWBP-S4	90 <sup>1</sup> / <sub>4</sub> " x 19" x 26 <sup>1</sup> / <sub>16</sub> "	1/2	560	NEMA 5-15P	283 lbs.	13333


#### All Refrigerated Slim Drop-In Well Models Feature:

Voltage: 120V, single phase.

Models Shipped with: Electronic temperature control, pan support bars for full-size pans, condensing unit, auto-defrost, sight glass, and filter-drier. Consult factory for refrigerant specifications.


**NOTE:** The installation kit, including the intake bracket, duct clamp, flexible duct, and duct collar, will be shipped separately.

#### Slant Option for: CWBP-S1, -S2, -S3, -S4

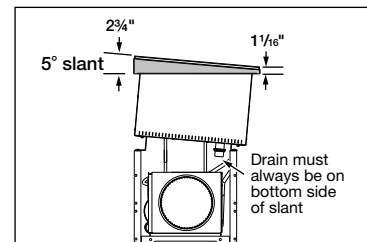


### OPTIONS (available at time of purchase only)

<b>EWC</b>	Additional Four Year Parts Only Warranty on the Compressor	<b>\$260</b>
<b>Slant Options –</b>		
<b>CWBP-S1SLANT</b>	Slant Option for CWBP-S1	<b>413</b>
<b>CWBP-S2SLANT</b>	Slant Option for CWBP-S2	<b>442</b>
<b>CWBP-S3SLANT</b>	Slant Option for CWBP-S3	<b>471</b>
<b>CWBP-S4SLANT</b>	Slant Option for CWBP-S4	<b>500</b>
<b>Gasket Options –</b>		
<b>BEZELGASKET-S1</b>	Factory installed for CWBP-S1	<b>\$121</b>
<b>BEZELGASKET-S2</b>	Factory installed for CWBP-S2	<b>121</b>
<b>BEZELGASKET-S3</b>	Factory installed for CWBP-S3	<b>158</b>
<b>BEZELGASKET-S4</b>	Factory installed for CWBP-S4	<b>158</b>



**BEZELGASKET-S1**  
Factory installed option  
(eliminates the need for  
silicone or other sealants)




## R-290 Drop-In Frost Tops

Keep your self-serve products - beverages, snacks, hors d'oeuvres, side dishes, desserts and other quick turnaround items - in the perfect chill zone with Hatco R-290 Drop-In Frost Tops.

- Accommodates full-size sheet pans
- Units include a 1" brass drain (excluding one-pan units)
- Optimal insulation on sides and bottom to ensure better cold retention, and built with one of the most efficient condensing units on the market
- Condenser uses environmentally friendly R-290 refrigerant

- Auto-defrost is activated through an advanced electronic controller programmed at the customer location
- Available in a slim, lengthwise configuration to allow for easy, reachable access to products

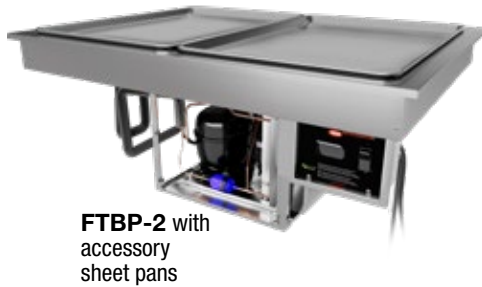

FTBP-2 with  
accessory  
sheet pans



FTBP-S2

### R-290 DROP-IN FROST TOPS

Model	Dimensions W x D x H	Drain (1" Brass Drain)	HP	Hz	Watts	Plug	Approx. Ship Weight	List Price
FTBP-1	21 <sup>1</sup> / <sub>16</sub> " x 28 <sup>1</sup> / <sub>16</sub> " x 23 <sup>1</sup> / <sub>16</sub> "	None	1/5	60	345	NEMA 5-15P	132 lbs.	\$ 9104
FTBP-2	39" x 28 <sup>1</sup> / <sub>16</sub> " x 17 <sup>1</sup> / <sub>8</sub> "	Yes	1/5	60	345	NEMA 5-15P	170 lbs.	10130
FTBP-3	57" x 28 <sup>1</sup> / <sub>16</sub> " x 17 <sup>1</sup> / <sub>8</sub> "	Yes	1/5	60	345	NEMA 5-15P	213 lbs.	11299
<b>Slim</b>								
FTBP-S2	54 <sup>1</sup> / <sub>16</sub> " x 21 <sup>1</sup> / <sub>16</sub> " x 17 <sup>1</sup> / <sub>8</sub> "	Yes	1/5	60	345	NEMA 5-15P	182 lbs.	\$10130
FTBP-S3	80 <sup>1</sup> / <sub>16</sub> " x 21 <sup>1</sup> / <sub>16</sub> " x 17 <sup>1</sup> / <sub>8</sub> "	Yes	1/5	60	345	NEMA 5-15P	239 lbs.	11299

#### All R-290 Drop-In Frost Top Models Feature:


**Voltage:** 120V, single phase.

**Models Shipped with:** Electronic temperature control, condensing unit and compressor.  
Consult factory for refrigerant specifications.

**NOTE:** The installation kit, including the intake bracket, duct clamp, flexible duct, and duct collar, will be shipped separately.

### ACCESSORIES (available for purchase at any time)

ALUM PAN	Half-Size Sheet Pan – 18"W x 13"D	\$48
18" SHEET PAN	Full-Size Sheet Pan – 18"W x 26"D	68





## Dry Soup Wells

Hatco's Dry Soup Wells offer a plumbing-free solution for rethermalizing or holding food at safe temperatures. Both the built-in and countertop units offer the same intuitive user interface, four customizable presets and six preset temperatures to make the Dry Soup Well a simple and effective solution.

- Gentle, even heating without the need for water
- Features an intuitive, interactive user interface
- Adjustable stir timers indicate when its time to stir
- Automatically transfers from rethermalization to hold
- Features a screen lock to keep anyone else from tampering with the controls
- Includes pan with hinged lid



Quick-Ship Model

### DRY SOUP WELLS

Model	Item #	Color	Dimensions <sup>^</sup> (W x H)	Voltage	Watts	Amps	Plug	Ship Weight*	List Price
<b>Countertop</b>									
✓ SWC-7QT	SWC7QTC515	Clear Coat	12 <sup>2</sup> / <sub>5</sub> " x 11 <sup>1</sup> / <sub>2</sub> "	120	425	3.5	NEMA 5-15P	14 lbs.	<b>\$1882</b>
✓ SWC-7QT	SWC7QTB515	Bold Black	12 <sup>2</sup> / <sub>5</sub> " x 11 <sup>1</sup> / <sub>2</sub> "	120	425	3.5	NEMA 5-15P	14 lbs.	<b>1882</b>
✓ SWC-11QT	SWC11QTC515	Clear Coat	14 <sup>2</sup> / <sub>5</sub> " x 11 <sup>1</sup> / <sub>2</sub> "	120	675	5.6	NEMA 5-15P	17 lbs.	<b>1935</b>
✓ SWC-11QT	SWC11BBC515	Bold Black	14 <sup>2</sup> / <sub>5</sub> " x 11 <sup>1</sup> / <sub>2</sub> "	120	675	5.6	NEMA 5-15P	17 lbs.	<b>1935</b>
<b>Built-In</b>									
✓ SWB-7QT	SWB7QT515	None	10 <sup>3</sup> / <sub>8</sub> " x 10 <sup>3</sup> / <sub>8</sub> "	120	425	3.5	NEMA 5-15P	14 lbs.	<b>\$1583</b>
✓ SWB-11QT	SWB11QT515	None	12 <sup>3</sup> / <sub>8</sub> " x 10 <sup>3</sup> / <sub>8</sub> "	120	675	5.6	NEMA 5-15P	17 lbs.	<b>1840</b>

\* Shipping weight includes packaging

<sup>^</sup> Dimensions only include the unit without the pan and lid

Cord Location: Rear right bottom.


### ACCESSORIES (available for purchase at any time)

#### Pans –

7QT-PAN	7-Quart Round Pan	<b>\$179</b>
11QT-PAN	11-Quart Round Pan	<b>197</b>

#### Lids –

7QT-LID	7-Quart Round, Hinged and Notched Lid	<b>\$131</b>
7QT-LID-1	7-Quart Round, Notched, Solid Lid	<b>94</b>
11QT-LID	11-Quart Round, Hinged and Notched Lid	<b>164</b>
11QT-LID-1	11-Quart Round, Notched, Solid Lid	<b>112</b>







## Retractable Cord Mount for Decorative Lamps

Hatco has added the Retractable Cord Mount for our Decorative Lamps, giving you ten mounting arrangements to choose from. Check out our Equipment Price List or "Build A Lamp" Configurator on the Hatco website so you can customize the perfect lamp to fit your operation's needs.

### STEP 2: MOUNTING STYLE

Mounting Style –		
RC	New Retractable Cord	\$599
	New Retractable Mount to Track Adapter (specify Cord and Track Color)	784
RCT *		

**NOTE:** Lamp shade diameter and wattage may limit number of lamps per track. To ensure warranty coverage, do not install track systems in damp or wet locations (including above steam tables).

MOUNTING STYLES		SPECIFY:	Shade Height	
			8½" H	10½" H
RETRACTABLE CORD	<b>RC Mount</b> New Retractable Cord Mount. 	<b>Overall Length</b>  Adjusts to a maximum and minimum according to shade height	24" to 72"	27" to 75"
	<b>RCT Mount</b> New Retractable Cord Mount. 		27" to 75"	29" to 77"

### Standard features

- Decorative lamps available in three electrical wattages: Luminaire (100W), Standard (250W) and High Watt (375W)
- Models available in fifteen lamp shade styles (not available for 2X00 style shades)
- Easily adjustable between 24" and 72" (27" to 75" for 10.5" Shades) for RC Mounts and 27" to 75" (29" to 77" for 10.5" Shades) for RCT Mounts
- Three power switch options available for RC, RCT Mounts: Lower (at stem), Remote and None
- Available for food holding and display or lighting only applications
- Track Adapter available in 120 volt only



**DL-1600-RCL**  
shown with  
New Retractable  
Cord Mount.



Hatco has given you a variety of simple and easy ways to "Build Your Decorative Lamp."

- GO online at:

**www.hatcocorp.com** and click on "Build a Lamp" on the top Tabs. (Download a PDF of your lamp configuration in color and a Hatco List Price Quote)

- OR follow the six steps in the Hatco Price List (Page 56) to build your Hatco model code and List Price. Then look at the following page for the accessories, like a bulb or track, to easily complete your total order.




Visit [www.hatcocorp.com](http://www.hatcocorp.com)  
Click on "Build a Lamp"

### STEP 3: SWITCH LOCATION

Switch Location –		No Charge
L	Lower	(not available on high watt models)
N	None	
R	Remote	
U	Upper	(not available on high watt models)

**NOTE:** The Retractable Cord Mount is not currently available for the -2100, -2200, -2300, -2400 Shade styles or with an Upper Switch configuration.


### SWITCH LOCATIONS



#### L - Lower Switch


Not available on:

- DLH (high watt models)
- Not available for DL-2100, -2200, -2300 or -2400.



#### R - Remote Switch

- Accommodates 16 amps
- Up to seven 250W lamps, or five 375W lamps maximum per remote switch




#### U - Upper Switch

Not available on:

- DLH (high watt models)
- R Mount and RC Mount
- Track mounts (CT, RT, RCT, ST, AST)

### COLORS AND FINISHES – INSIDE BACK COVER OF CURRENT PRICE LIST

### ACCESSORIES AND OPTIONS – SEE CURRENT PRICE LIST PAGE 51



**NOTE:** Decorative Lamps and Luminaires are non-returnable.



## Optional Dekton® Ultracompact Stone Surfaces for Glo-Ray® Portable Rectangular Heated Simulated Stone Shelves

Hatco's GRSS Glo-Ray® Portable Rectangular Heated Simulated Stone Shelves now include a new optional surface: Dekton® stone. With Dekton®, these portable shelves now come in three new stone colors: Domoos, Rem and Soke®.

Dekton® is a sophisticated mixture of over 20 minerals extracted from nature, resistant to scratches and impact. Dekton® stone can withstand abrasion better than granite or porcelain. The sintering and compression techniques used to manufacture Dekton® make it completely non-porous and resistant to water and stains, which can be removed easily with standard cleaning products.

• Due to the natural texture, patterns will vary.

- A carbon neutral product
- Abrasion, impact, scratch and heat resistant
- Contains a non-porous surface, making it water and stain resistant
- Available in Rem, Soke and Domoos



**GRSS-3618**  
with optional Soke  
surface by Dekton®



**GRSS-4818**  
with optional Domoos  
surface by Dekton®



**Dekton® stone surfaces are  
available for use on these models:**

GRSS		
• GRSS-2418	• GRSS-3618	• GRSS-6018
• GRSS-3018	• GRSS-4818	• GRSS-7218

### OPTIONS (available at time of purchase only)

**Dekton® Stone Colors – All Dekton surfaces are non-returnable –**

**GRSS-2418 – Rectangular Heated Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$ 937</b>
<b>REM</b>	Rem	<b>937</b>
<b>SOKE</b>	Soke	<b>937</b>

**GRSS-3018 – Rectangular Heated Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$1093</b>
<b>REM</b>	Rem	<b>1093</b>
<b>SOKE</b>	Soke	<b>1093</b>

**GRSS-3618 – Rectangular Heated Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$1352</b>
<b>REM</b>	Rem	<b>1352</b>
<b>SOKE</b>	Soke	<b>1352</b>

**GRSS-4818 – Rectangular Heated Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$1478</b>
<b>REM</b>	Rem	<b>1478</b>
<b>SOKE</b>	Soke	<b>1478</b>

**GRSS-6018 – Rectangular Heated Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$1781</b>
<b>REM</b>	Rem	<b>1781</b>
<b>SOKE</b>	Soke	<b>1781</b>

**GRSS-7218 – Rectangular Heated Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$2085</b>
<b>REM</b>	Rem	<b>2085</b>
<b>SOKE</b>	Soke	<b>2085</b>

**Dekton® surfaces that are available for these models:**

**Domoos**



**Rem**



**Soke**






## Optional Dekton® Ultracompact Stone Surfaces for Hot/Cold Built-In Simulated Stone Shelves

Hatco's HCSSB Hot/Cold Built-In Simulated Stone Shelves not only easily transition between heated and cold shelves, but now include Dekton® stone as an optional surface. The optional Dekton surface comes in three stone colors: Domoos, Rem and Soke\*.

Dekton® is a sophisticated mixture of over twenty minerals extracted from nature, resistant to scratches and impact. Dekton® stone can withstand abrasion better than granite or porcelain. The sintering and compression techniques used to manufacture Dekton® make it completely non-porous and resistant to water and stains, which can be removed easily with standard cleaning products.

\* Due to the natural texture, patterns will vary.

- A carbon neutral product
- Abrasion, impact, scratch and heat resistant
- Contains a non-porous surface, making it water and stain resistant
- Available in Rem, Soke and Domoos

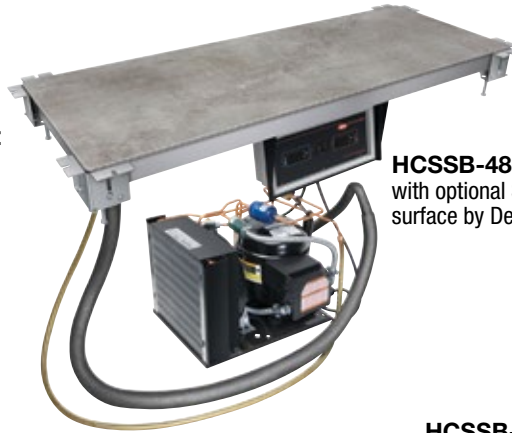

**HCSSB-4818**  
with optional Soke  
surface by Dekton®



**HCSSB-3018**  
with optional Rem  
surface by Dekton®

Dekton® stone surfaces are available for use on these models:

### HCSSB

- HCSSB-2418 • HCSSB-3618
- HCSSB-3018 • HCSSB-4818

### OPTIONS (available at time of purchase only)

**Dekton® Stone Colors – All Dekton surfaces are non-returnable –**

**HCSSB-2418 – Hot/Cold Built-In Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$ 879</b>
<b>REM</b>	Rem	<b>879</b>
<b>SOKE</b>	Soke	<b>879</b>

**HCSSB-3018 – Hot/Cold Built-In Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$1221</b>
<b>REM</b>	Rem	<b>1221</b>
<b>SOKE</b>	Soke	<b>1221</b>

**HCSSB-3618 – Hot/Cold Built-In Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$1413</b>
<b>REM</b>	Rem	<b>1413</b>
<b>SOKE</b>	Soke	<b>1413</b>

**HCSSB-4818 – Hot/Cold Built-In Shelves –**

<b>DOMOOS</b>	Domoos	<b>\$1494</b>
<b>REM</b>	Rem	<b>1494</b>
<b>SOKE</b>	Soke	<b>1494</b>

Dekton® surfaces that are available for these models:

**Domoos**



**Rem**



**Soke**






## R-290 Cold Simulated Stone Shelves Built-In

Hatco's R-290 Cold Simulated Stone Shelves Built-In are an environmentally friendly solution to keep food cold on buffet lines in cafeterias, restaurants and much more!

- Keeps food cold using environmentally friendly R-290 refrigerant
- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
- All models are bottom mount units
- Simulated stone is Swanstone®
- All models match the GRSSB Heated Simulated Stone Built-In Shelves for a fully integrated look
- Control Box comes with standard 4' lead wire

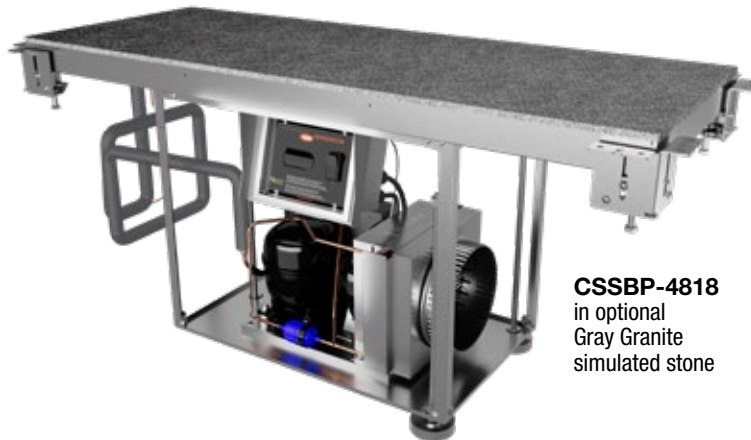

**CSSBP-4818**  
in optional  
Gray Granite  
simulated stone

### COLD SIMULATED STONE SHELVES BUILT-IN (flush to countertop)

Model	Overall Shelf Dimensions (includes brackets) W x D	Shelf Space W x D	Voltage Single Phase	Watts	Hz	Comp. Size HP	Approx. Ship Weight	List Price
<b>CSSBP-2418</b>	27" x 21"	24" x 18"	120	345	60	1/5	120 lbs.	<b>\$ 10411</b>
<b>CSSBP-3018</b>	33" x 21"	30" x 18"	120	345	60	1/5	132 lbs.	<b>10840</b>
<b>CSSBP-3618</b>	39" x 21"	36" x 18"	120	345	60	1/5	149 lbs.	<b>11015</b>
<b>CSSBP-4818</b>	51" x 21"	48" x 18"	120	440	60	1/3	145 lbs.	<b>12657</b>

**All Cold Simulated Stone Shelf Built-In models feature:**

Models Shipped with: Electronic Temperature Control and a condensing unit, 6' cord and plug (NEMA 5-15P).

### OPTIONS

(available at time of purchase only)

**Simulated stone colors –**

**Non-standard colors are non-returnable – Night Sky standard –**

**SS-GGRAN** Gray Granite

**No Charge**

**SS-BSAND** Bermuda Sand


**No Charge**

**COLORS AND FINISHES – INSIDE BACK COVER OF CURRENT PRICE LIST**

### COUNTERTOP CUTOUT DIMENSIONS

Model	Width with 3/8" corner radii	Depth with 3/8" corner radii
<b>CSSBP-2418</b>	24 3/8"	18 3/8"
<b>CSSBP-3018</b>	30 3/8"	18 3/8"
<b>CSSBP-3618</b>	36 3/8"	18 3/8"
<b>CSSBP-4818</b>	48 3/8"	18 3/8"

**NOTE:** The installation kit, including the intake bracket, duct clamp, flexible duct, and duct collar, will be shipped separately.

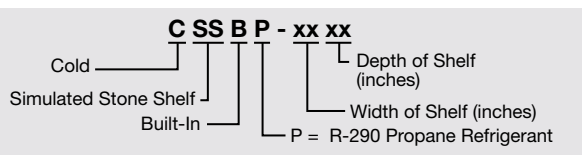




## R-290 Cold Simulated Stone Shelves Built-In Flush Top

Hatco's new R-290 Cold Simulated Stone Shelves Built-In Flush Top are a must for buffet lines in cafeterias, restaurants and more!

- Condenser utilizes environmentally friendly R-290 refrigerant
- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
- All models are bottom mount units
- Control Box can be mounted 4' from center of the shelf
- Simulated stone is Swanstone®

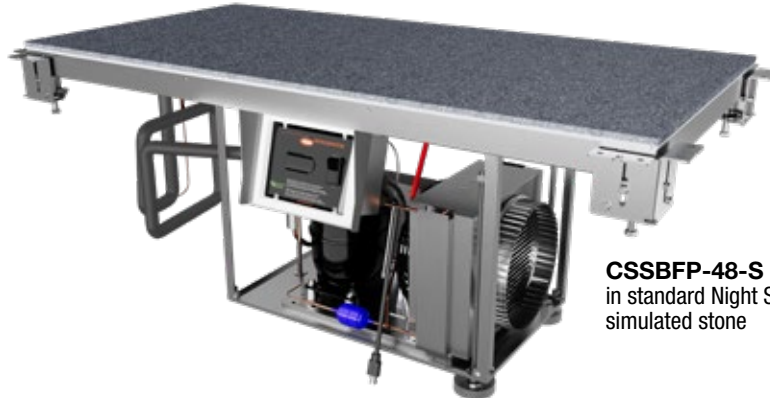

**CSSBFP-48-S**  
in standard Night Sky simulated stone

### R-290 COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP

Model	Overall Shelf Dimensions (includes brackets) W x D	Shelf Space W x D	Voltage Single Phase	Watts	Hz	Comp. Size HP	Approx. Ship Weight	List Price
CSSBFP-24-F	27" x 18½"	24" x 15½"	120	345	60	1/5	119 lbs.	\$ 9917
CSSBFP-24-I	27" x 22½"	24" x 19½"	120	345	60	1/5	124 lbs.	10600
CSSBFP-24-S	27" x 27"	24" x 24"	120	345	60	1/5	134 lbs.	11234
CSSBFP-36-F	39" x 18½"	36" x 15½"	120	345	60	1/5	138 lbs.	10795
CSSBFP-36-I	39" x 22½"	36" x 19½"	120	440	60	1/3	155 lbs.	11312
CSSBFP-36-S	39" x 27"	36" x 24"	120	440	60	1/3	164 lbs.	12817
CSSBFP-48-F	51" x 18½"	48" x 15½"	120	440	60	1/3	159 lbs.	11692
CSSBFP-48-I	51" x 22½"	48" x 19½"	120	440	60	1/3	171 lbs.	12537
CSSBFP-48-S	51" x 27"	48" x 24"	120	560	60	1/2	189 lbs.	15060

All Cold Simulated Stone Shelf Built-In Flush Top models feature:

Electronic Temperature Control and a condensing unit, 6' cord and plug (NEMA 5-15P).

### OPTIONS (available at time of purchase only)

Simulated stone colors – Non-standard colors are non-returnable – Night Sky standard –


SS-GGRAN	Gray Granite	No Charge
SS-BSAND	Bermuda Sand	No Charge

### COLORS AND FINISHES – INSIDE BACK COVER OF CURRENT PRICE LIST

**NOTE:** The installation kit, including the intake bracket, duct clamp, flexible duct, and duct collar, will be shipped separately.

### COUNTERTOP CUTOUT DIMENSIONS

Model	Width with 3/8" corner radii	Depth with 3/8" corner radii
CSSBFP-24-F	24 3/8"	15 7/8"
CSSBFP-24-I	24 3/8"	19 7/8"
CSSBFP-24-S	24 3/8"	24 3/8"
CSSBFP-36-F	36 3/8"	15 7/8"
CSSBFP-36-I	36 3/8"	19 7/8"
CSSBFP-36-S	36 3/8"	24 3/8"
CSSBFP-48-F	48 3/8"	15 7/8"
CSSBFP-48-I	48 3/8"	19 7/8"
CSSBFP-48-S	48 3/8"	24 3/8"

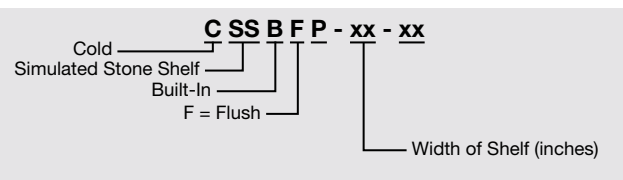



## R-290 Cold Shelves Built-In Flush Top

Hatco's R-290 Cold Shelves Built-In Flush Top, in our signature Hardcoat Aluminum, are designed to keep your pre-chilled beverages, hors d'oeuvres, side dishes, buffet items and more, perfectly chilled.

- Condenser utilizes environmentally friendly R-290 refrigerant
- Patented thermal break reduces condensation and temperature transfer on adjacent surfaces
- All models are top mounted with an Hardcoat Aluminum surface
- All models match the GRSBF Heated Built-In Shelves for a fully integrated look
- Control Box comes standard with a 4' lead wire



**CSBFP-48-S**  
(Flush Top)

### COLD SHELVES BUILT-IN FLUSH TOP (Hardcoat Aluminum)

Model	Overall Shelf Dimensions W x D	Usable Shelf Space W x D	Voltage Single Phase	Watts	Comp. Size HP	Hz	Approx. Ship Weight	List Price
CSBFP-24-F	25½" x 17"	24" x 15½"	120	345	1/5	60	108 lbs.	\$ 8973
CSBFP-24-I	25½" x 21"	24" x 19½"	120	345	1/5	60	116 lbs.	9349
CSBFP-24-S	25½" x 25½"	24" x 24"	120	345	1/5	60	117 lbs.	9731
CSBFP-36-F	37½" x 17"	36" x 15½"	120	345	1/5	60	130 lbs.	9595
CSBFP-36-I	37½" x 21"	36" x 19½"	120	440	1/3	60	130 lbs.	10344
CSBFP-36-S	37½" x 25½"	36" x 24"	120	440	1/3	60	151 lbs.	10856
CSBFP-48-F	49½" x 17"	48" x 15½"	120	440	1/3	60	138 lbs.	10612
CSBFP-48-I	49½" x 21"	48" x 19½"	120	440	1/3	60	157 lbs.	11126
CSBFP-48-S	49½" x 25½"	48" x 24"	120	560	1/2	60	177 lbs.	12032


#### All Cold Shelf Built-In Flush Top models feature:

Electronic Temperature Control and a condensing unit, 6' cord and plug (NEMA 5-15P).

### COUNTERTOP CUTOUT DIMENSIONS

Model	Width		Depth	
	Min	Max	Min	Max
CSBFP-24-F	24⅝"	25"	16⅞"	16½"
CSBFP-24-I	24⅝"	25"	20⅞"	20½"
CSBFP-24-S	24⅝"	25"	24⅝"	25"
CSBFP-36-F	36⅝"	37"	16⅞"	16½"
CSBFP-36-I	36⅝"	37"	20⅞"	20½"
CSBFP-36-S	36⅝"	37"	24⅝"	25"
CSBFP-48-F	48⅝"	49"	16⅞"	16½"
CSBFP-48-I	48⅝"	49"	20⅞"	20½"
CSBFP-48-S	48⅝"	49"	24⅝"	25"

**NOTE:** The installation kit, including the intake bracket, duct clamp, flexible duct, and duct collar, will be shipped separately.

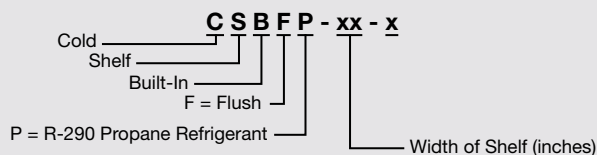


## R-290 Cold Shelves Undermount

R-290 Cold Shelves Undermount use environmentally friendly R-290 refrigerant to provide a cold surface like the Cold Built-in Flush Top Shelves, but are mounted directly against the underside of a granite, quartz, Stainless Steel or appropriate solid surface countertop. Cooling transfers through the countertop with a seamless look.

- Condenser utilizes environmentally friendly R-290 refrigerant
- Mounts directly to underside of appropriate countertop material
- Approved materials include granite and quartz up to 1 3/16", Swanstone® (provided by Hatco), and certain Stainless Steel or aluminum surfaces approved by

Hatco. Please contact the factory for applications with other material \*

- All models feature an anodized aluminum surface
- Control Box comes standard with a 4' lead wire

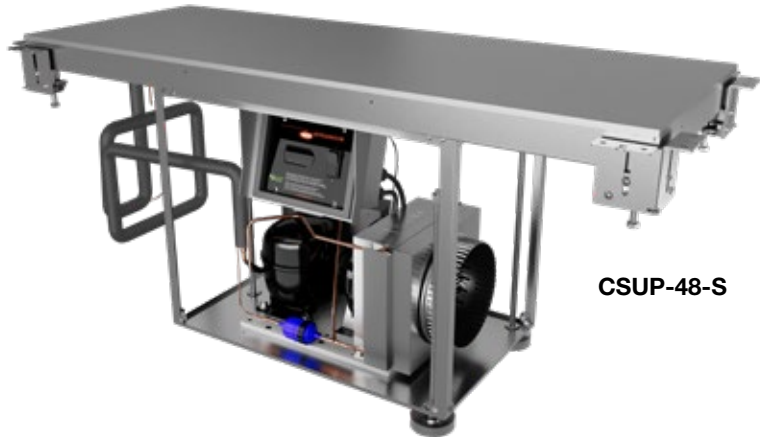

CSUP-48-S

### COLD SHELVES UNDERMOUNT (Anodized Aluminum)

Model #	Overall Shelf Dimensions (includes brackets) W x D	Usable Shelf Space W x D	Watts 120V Single Phase	Hz	Compressor Size HP	Approx. Ship Weight	List Price
CSUP-24-F	27 5/16" x 18 13/16"	24" x 15 1/2"	345	60	1/5	118 lbs.	\$ 8746
CSUP-24-I	27 5/16" x 22 13/16"	24" x 19 1/2"	345	60	1/5	115 lbs.	9032
CSUP-24-S	27 5/16" x 27 5/16"	24" x 24"	345	60	1/5	130 lbs.	9715
CSUP-36-F	39 5/16" x 18 13/16"	36" x 15 1/2"	345	60	1/5	143 lbs.	9151
CSUP-36-I	39 5/16" x 22 13/16"	36" x 19 1/2"	440	60	1/3	140 lbs.	9713
CSUP-36-S	39 5/16" x 27 5/16"	36" x 24"	440	60	1/3	125 lbs.	10066
CSUP-48-F	51 5/16" x 18 13/16"	48" x 15 1/2"	440	60	1/3	141 lbs.	9908
CSUP-48-I	51 5/16" x 22 13/16"	48" x 19 1/2"	440	60	1/3	144 lbs.	10131
CSUP-48-S	51 5/16" x 27 5/16"	48" x 24"	560	60	1/2	178 lbs.	11144

#### All Cold Shelf Undermount models feature:

**Models Shipped with:** Electronic Temperature Control and a condensing unit, 6' cord and plug (NEMA 5-15P), thermal mastic caulk and single use applicator.


### COUNTERTOP CUTOUT DIMENSIONS

Model	Width with 3/8" corner radii	Depth with 3/8" corner radii
CSUP-24-F	24 3/8"	15 7/8"
CSUP-24-I	24 3/8"	19 7/8"
CSUP-24-S	24 3/8"	24 3/8"
CSUP-36-F	36 3/8"	15 7/8"
CSUP-36-I	36 3/8"	19 7/8"
CSUP-36-S	36 3/8"	24 3/8"
CSUP-48-F	48 3/8"	15 7/8"
CSUP-48-I	48 3/8"	19 7/8"
CSUP-48-S	48 3/8"	24 3/8"



CSUP models include thermal mastic caulk and a single use applicator

**NOTE:** The installation kit, including the intake bracket, duct clamp, flexible duct, and duct collar, will be shipped separately.

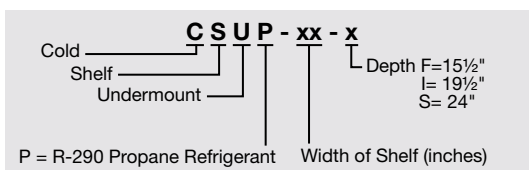

ecoization  
Naturally





## Toast-Qwik® Conveyor Toasters

Hatco's next generation of Toast-Qwik® Conveyor Toasters have been designed to provide a great new look and increased production capabilities. They continue to provide the best reliability, flexibility and value of any conveyor toaster available!

- Patented ColorGuard Sensing System continually monitors chamber temperature and adjusts the chamber to ensure consistent toast results – even in your busiest periods
- Power Save mode activates manually by pressing the Power Save Button above the leaf symbol, which reduces power by 50%
- Features an Air Intake Filter Screen which is removable for easy cleaning
- Crumb tray is removable
- 2" high opening for standard TQ3-20 unit
- 3" high for TQ3-20H unit, which is better for use with thicker breads and rolls
- DC stepper motor provides wide range of linear and precise speed control
- TQ3-20 and TQ3-20H models produce between 600-700 slices of toast per hour
- Double-sided or single-sided toasting at the touch of a button

**TQ3-20**  
in standard  
Designer Black



**TQ3-20H**  
in standard  
Designer Black



### HORIZONTAL CONVEYOR TOASTERS

Model	Opening Dimensions (W x H)	Dimensions (W x D x H) Height includes legs	Voltage 50/60Hz	Watts	Amps	Plug	Approx. Ship Weight	List Price
TQ3-20	10 <sup>3</sup> / <sub>8</sub> " x 2"	14 <sup>3</sup> / <sub>8</sub> " x 20 <sup>11</sup> / <sub>16</sub> " x 17 <sup>9</sup> / <sub>64</sub> "	208 240	2470	11.9 10.3	NEMA 6-15P	54 lbs.	<b>\$5494</b>
TQ3-20H	10 <sup>3</sup> / <sub>8</sub> " x 3"	14 <sup>3</sup> / <sub>8</sub> " x 20 <sup>11</sup> / <sub>16</sub> " x 17 <sup>9</sup> / <sub>64</sub> "	208 240	2620	12.6 10.9	NEMA 6-20P NEMA 6-15P	54 lbs.	<b>5543</b>


#### All Toast-Qwik® Models Feature:

Cord Location: 6' cord – back of unit, lower right corner.

### OPTIONS (available at time of purchase only)

**Designer Colors – Non-standard colors are non-returnable – Designer Black Standard –**

SS	Stainless Steel	<b>\$345</b>
WRED	Designer Warm Red	<b>No Charge</b>
SSINSERT	Stainless Steel toast tray insert	<b>66</b>
TQ3-RAMP	Extended feed ramp in lieu of existing ramp – adds 3"	<b>178</b>
TQ3-RAMP-XL	XL extended feed ramp in lieu of existing ramp – adds 9"	<b>66</b>



## Drop-In Induction Dry Well


Hatco's Drop-In Induction Dry Well features a simple, robust design and offers an energy efficient, plumbing-free solution to any food holding needs. This unit is adjustable with little effort and can hold either a 2½" or 4" deep, full-size pan. The well evenly and consistently heats the pan to keep foods hot and fresh.

- Durable and tough glass-ceramic well bottom can be easily adjusted to accommodate a 2½" or 4" deep pan
- Made for use with normal, full-size, ½-size, ⅓-size & ¼-size, stainless steel pans
- Contains two heat zones with two temperature sensors in each zone
- An easy-to-use, mountable control panel that can be adjusted by temperatures in Fahrenheit, Celsius or by preset temperature levels between 150° and 210°F
- Features a sensor that prohibits the unit to turn on unless a pan is present
- Includes a single stainless steel bezel
- Can be top or bottom mounted into a countertop

**IWELB-FUL-A**  
with standard  
full-size pan



**IWELB-FUL-A**  
adjusted for a 2½" deep pan



**IWELB-FUL-A**  
adjusted for a 4" deep pan

**Quick-Ship Model**

### DROP-IN INDUCTION DRY WELL

Model	Dimensions W x D x H	Voltage Single Phase	Watts	Plug	Approx. Ship Weight	List Price
✓ <b>IWELB-FUL-A</b>	24" x 16" x 9⅞"	<b>120</b>	720	NEMA 5-15P	43 lbs.	<b>\$3831</b>
✓ <b>IWELB-FUL-A</b>	24" x 16" x 9⅞"	<b>208-240</b>	720	NEMA 6-15P	43 lbs.	<b>\$3831</b>

#### All Drop-In Induction Dry Wells Feature:

Models Shipped with: A 78" cable from the base to the control and a 71" cord and plug.

Cord Location: Bottom right side.

### ACCESSORIES (available for purchase at any time)

#### Pans –




<b>ST PAN 1/3</b>	Third-Size Stainless Steel Pan	<b>\$ 88</b>
<b>ST PAN 1/2</b>	Half-Size Stainless Steel Pan	<b>101</b>
<b>ST PAN 2</b>	Full-Size Stainless Steel Pan, 2½" depth	<b>121</b>
<b>ST PAN 4</b>	Full-Size Stainless Steel Pan, 4" depth	<b>152</b>

#### Bezels –

<b>IWELBEZEL-2</b>	For use when ganging two units	<b>\$314</b>
<b>IWELBEZEL-3</b>	For use when ganging three units	<b>429</b>

#### Trivets –

<b>TRIVET (1/2) SS</b>	Half-Size – 10⅜"W x 7⅞"D	<b>\$164</b>
<b>TRIVET SS</b>	Full-Size – 10⅞"W x 18"D	<b>227</b>

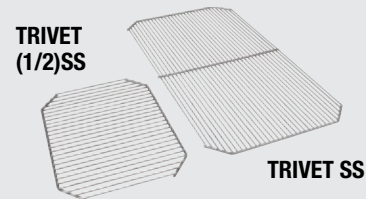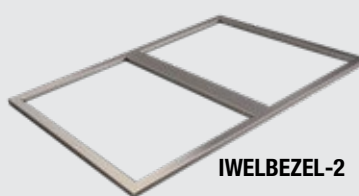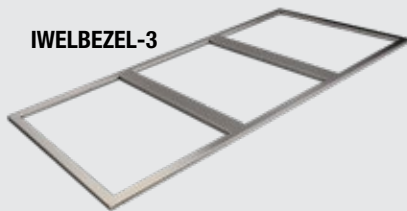

**NEW OPTIONS AND ACCESSORIES**

**Snack System  
New Norwegian  
Waffle Plates**

Check out the newest plate for the legendary Snack System. This innovative plate attaches to the Snack System and produces delicious Norwegian waffles. These thin, soft waffles can be enjoyed whole or can easily be sectioned into their recognizable heart-shaped portions.



**HEART WAFFLE**  
Accessory Norwegian  
waffle plate.

**ACCESSORIES** *(available for purchase at any time)*

<b>HEART WAFFLE</b>	Norwegian Waffle Plate	<b>\$408</b>
---------------------	------------------------	--------------