



...Keeps It Simple!

Remote Control Enclosures



NEW RMB2-1R Control Box
includes one relay that will safely handle up to 20 amps.

10.98"W x 4.28"D x 5.5"H (279 x 109 x 140 mm),
Compatible with Max Watt, Ultra Glo®, Infra Black®,
and GRAHL Hatco models.

New!



NEW RMB2-2R Control Box
includes two relays that will safely handles up to 40 amps total.

13.98"W x 4.28"D x 5.5"H (355 x 109 x 140 mm),
Compatible with Max Watt, Ultra Glo®, Infra Black®,
and GRAHL Hatco models.



Remote Control Box


- Easy to specify, install, and service.
- Compatible with most Strip Heaters (GR, GRA, GRAH, GRAIH, GR2A, GR2AH, GRN and GRNH series).
- Maximum of 10 amps total allowed on the light circuit.
- Total amperage of light and heat combined cannot exceed max amp rating of the control box.
- Multiple foodwarmers may be connected to one RMB2 if the combined current draw of the warmers is less than the rating of the RMB2. All warmers will be controlled with same set-point.





REMOTE CONTROL BOX


Models RMB2-1R-12-120, -208, -240, RMB2-1R-16-120, -208, -240, RMB2-1R-20, -120, -208, -240
RMB2-2R-24-120, -208, -240, RMB2-2R-32-120, -208, -240, RMB2-2R-40, -120, -208, -240

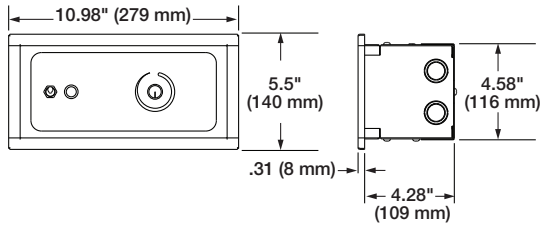

FRONT VIEW

SIDE VIEW

RMB2-1R Models

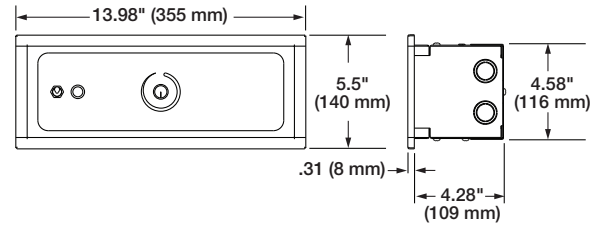

FRONT VIEW

SIDE VIEW

RMB2-2R Models

SPECIFICATIONS

Remote Control Enclosure Single Relay					
Model	Voltage	Relay	Max Amps	Width	Shipping Weight
RMB2-1R	120, 208, 240	1	12	10.98" (279 mm)	6 lbs. (3 kg)
RMB2-1R	120, 208, 240	1	16	10.98" (279 mm)	6 lbs. (3 kg)
RMB2-1R	120, 208, 240	1	20	10.98" (279 mm)	6 lbs. (3 kg)

Remote Control Enclosure Dual Relay					
Model	Voltage	Relay	Max Amps	Width	Shipping Weight
RMB2-2R	120, 208, 240	2	24	13.98" (355 mm)	8 lbs. (4 kg)
RMB2-2R	120, 208, 240	2	32	13.98" (355 mm)	8 lbs. (4 kg)
RMB2-2R	120, 208, 240	2	40	13.98" (355 mm)	8 lbs. (4 kg)

ORDERING CONSIDERATIONS

1. Find the volt and current (amp) rating for the foodwarmer(s) the RMB2 will be controlling. This is the total current of all circuits on the warmer(s).
2. If the current rating is under 20 amps, then select an RMB2-1R, if the current rating is between 20 and 40 amps, select the RMB2-2R. The RMB2-2R has two 20 amp outputs.
3. Select the current (amp) rating of the RMB2 that is just above the total current rating of the warmer(s) it will control. The RMB2 will need to be connected to a branch circuit breaker suitable for its current rating.
4. Select the voltage rating for the RMB2 based on the highest voltage rating of the warmer(s). For example, if the warmer(s) is rated 120/208 volts, select a 208 volt RMB2 control.

DIMENSIONS

RMB2-1R: 10.98"W x 4.28"D x 5.5"H (279 x 109 x 140 mm).

RMB2-2R: 13.98"W x 4.28"D x 5.5"H (355 x 109 x 140 mm).

Control Cutout Dimensions

RMB2-1R: 10.13"W x 4.75"H (257 x 121 mm).

RMB2-2R: 13.13"W x 4.75"H (333 x 121 mm).

VOLTAGE

RMB2-1R: 120, 208, 240 volts, single phase.

RMB2-2R: 120, 208, 240 volts, single phase.

PRODUCT SPECS

Narrow Foodwarmer

The Remote Control Boxes shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 service (U.S. and Canada only), the Remote Control Box shall be a Model ..., rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

The Remote Control Box shall be factory assembled ready for electrical installation.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com