

Toast-Qwik® Electric **Conveyor Toasters**

Models: TQ-10, -400, -405, -400BA, -400H

The Hatco Toast-Qwik® is an economical conveyor toaster with fast, dependable and versatile toasting. These toasters utilize conveyor speed, not temperature to determine toasting color.

Standard features

- Patented ColorGuard sensing system assures toast uniformity. (excludes TQ-10)
- Optional power save mode with indicator light saves energy and money during slow periods
- Efficient design of front or rear discharge allows Toast-Qwik to be placed where it is most convenient – for sending product to operator side or customer/server
- BA models toast one side only and are for bagels and buns only, cut side up
- Opening height is 2" (5 mm) and for H models is 3" (8 mm)
- Insulation and an interior fan provide cool surface temperatures
- TQ-10 has a durable painted steel top and aluminized steel construction
- Toast storage area keeps bread warm and dry
- Permanently lubricated ball bearing motor and heating elements guaranteed against burnout and breakage for two years

Project	
Item # _	
Quantity	



Options (available at time of purchase only) ☐ Automatic Power Save Mode (TQ-400 Series only)

Accessories

- ☐ Additional extended feed guide (Add 3" (76 mm))
- ☐ Security Package












Toast Qwik® Electric Conveyor Toasters

Models: TQ-10, -400, -405, -400BA, -400H

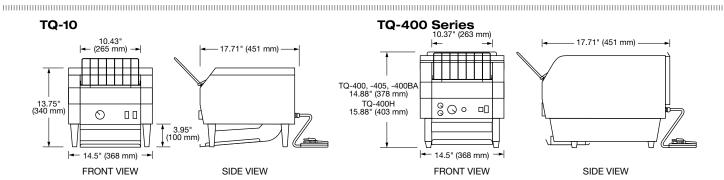

SPECIFICATIONS Toast Qwik Conveyor Toasters

The shaded areas contain electrical information for International models


Model	Dimensions (Width x Depth x Height*)	Volts	Hertz	Phase	Watts	Amps	Plug	Ship Weight*
TQ-10	14.5" x 17.71" x 13.75" (368 x 451 x 340 mm)	120	60	Single	1800	15.0	NEMA 5-15P [●]	42 lbs. (19 kg)
		208			1830	8.8	NEMA 6-15P	
		240			1000	7.6		
		200	50/60		2070	10.4	AS 3112	
		220-230 (CE)			1866-2048	8.5-8.9	CEE 7/7, BS-1363, or AS 3112	
		230-240 (CE)			2048-2221	8.9-9.3		
TQ-400	14.5" x 17.71" x 14.88" (368 x 451 x 378 mm)	120	60	- Single	1790	14.9	NEMA 5-15P [●]	- 46 lbs. (21 kg)
		208			2230 -	10.7	NEMA 6-15P	
		240				9.3		
		200	50/60		2064	10.3	AS 3112	
		220-230 (CE)			1860-2030	8.5-8.8	CEE 7/7, BS-1363, or AS 3112	
		230-240 (CE)			2030-2210	8.8-9.2		
TQ-405	14.5" x 17.71" x 14.88" (368 x 451 x 378 mm)	220-230 (CE)	50-60	Single	2131-2330	9.7-10.1	CEE 7/7, BS-1363, or AS 3112	46 lbs. (21 kg)
		230-240 (CE)			2030-2210	8.8-9.2		
TQ-400H	14.5" x 17.71" x 15.88" (368 x 451 x 403 mm) Tray extends 2.5" (64 mm) in rear	208	50/60	Single	2230	10.7	NEMA 6-15P	46 lbs. (21 kg)
		240			2230	9.3		
		200			2064	10.3	AS 3112	
		220-230 (CE)			2131-2330	9.7-10.1	CEE 7/7, BS-1363, or AS 3112	
		230-240 (CE)			2030-2210	8.8-9.2		
TQ-400BA	14.5" x 17.71" x 14.88" (368 x 451 x 378 mm)	120	60 50/60	Single	1780	14.8	NEMA 5-15P•	46 lbs. (21 kg)
		208			1880	9.0	NEMA 6-15P AS 3112 CEE 7/7, BS-1363, or AS 3112	
		240				7.8		
		200			1848	9.2		
		220-230 (CE)			1765-1930	8.0-8.4		
		230-240 (CE)			1930-2100	8.4-8.8		

^{*} TQ-400 and -400BA, add 2.5" (64 mm) to depth if using tray extension in rear. Height includes legs.

CORD LOCATION

Lower right corner on back of unit.

PLUG CONFIGURATIONS



PRODUCT SPECS Conveyor Toasters

The electric Toast-Qwik® Conveyor Toaster with patented Color Guard (excludes TQ-10) shall be a Hatco model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Toaster shall have the capacity to toast up to ... pieces per minute and it shall be rated at ... kW, ... volts, single phase. The toaster shall be of stainless steel design and shall include a front mounted control panel with

a toast selector knob, variable speed control knob, and an aluminum toast collector pan (excluding TQ-10). The toaster will have multiple metal sheathed heating elements and an impedance protected motor. It shall be complete with factory attached UL listed 4' (1219 mm) cord and plug.

Comes with 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intlsales@hatcocorp.com

^{*} Shipping weight includes packaging.

[•] NEMA 5-20P for Canada.