



Decorative Lamp & Display Light Solutions

*Cafeterias • Convenience Stores
Supermarkets & Delis • Restaurants & Cafés
Clubs & Bars • Concessions*



DL-1100-SR (DL-1200-SR, -1300-SR in background) in Gloss finish Clear Brushed Metal *pg. 4*



DL-400-SN in Gloss finish Glossy Gray *pg. 4*



DL-400-STR in Gloss finish Glossy Gray *pg. 4*



DL-500-SR in Plated finish Bright Brass *pg. 4*



DL-700-RL in Gloss finish Glossy Gray (sneeze guards shown not available) *pg. 4*



DL-725-STR in Plated finish Bright Nickel *pg. 4*



DL-750-STR in Plated finish Bright Nickel *pg. 4*



HL5-60 in standard Clear Anodized finish (sneeze guards shown not available) *pg. 8*



NLX-48 in standard Designer Black (sneeze guards shown not available) *pg. 9*



Decorative Lamp & Display Light Solutions



ORDERING INSTRUCTIONS

Luminaire Lamps are for lighting only. LUMINAIRE option must be specified when Lamps are utilized for decorative purposes only (no heating). This option is not field convertible. Maximum 200 watts.

CLEARANCE REQUIREMENTS

NOTE: Install Standard Watt (120V, 250W bulb) no closer than 1" from a sidewall and no closer than 16" above a combustible surface, or no closer than 5" to a non-combustible surface.



NOTE: Install HIGH WATT (120V, 375W bulb) no closer than 1" from a sidewall and no closer than 27" above a combustible surface, or no closer than 5" to a non-combustible surface.

NOTE: Multiple installation of Decorative Lamps must have a minimum clearance of 12" on center of shade between each unit.

Specify the following information with your order:

- Electrical:**
Voltage: 120
Wattage: 200 (Luminaire), 250 (Standard) or 375 (High)
- Mounting Style Code:** A, C, CT, P, R, RT, S or ST
- Switch Location Code:** Lower (L), None (N), Remote (R) or Upper (U). DLH models must have remote switch or none
- Shade Style Code:** -400, -500, -600, -700, -725, -750, -760, -775, -800, -1100, -1200, -1300, -1400 or -1500
- Shade and Canopy Colors:**
Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper, Smooth White, Gleaming Gold, Glossy Gray, Bold Black, Radiant Red* (lampshade only), Brilliant Blue* (lampshade only), Clear Brushed Metal* (lampshade only), Bright Brass*, Bright Nickel*, Bright Copper*, Antique Nickel*, Antique Brass* or Antique Bronze*
- Overall Unit Length:** For C, CT, S or ST Mounts, from ceiling to bottom of warmer lamp shade
For A or P Mounts, from center of shade to wall plus vertical shade length
- Clearance:** From bulb to surface (see **NOTE** Clearance Requirements above)
- Accessory Bulb Color/Coating:**
60W Clear Coated (Luminaire only)
250W Clear Uncoated, Clear Coated, Red Uncoated or Red Coated
375W Clear Uncoated, Clear Coated
- Optional Cord/Track Color:** Black (standard), White (optional)

* Special process required and extended lead times.
Specify your appropriate accessories with your order.

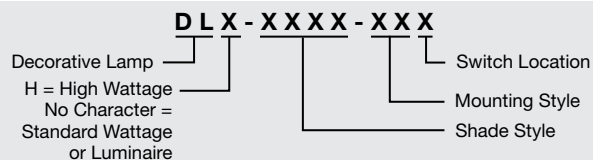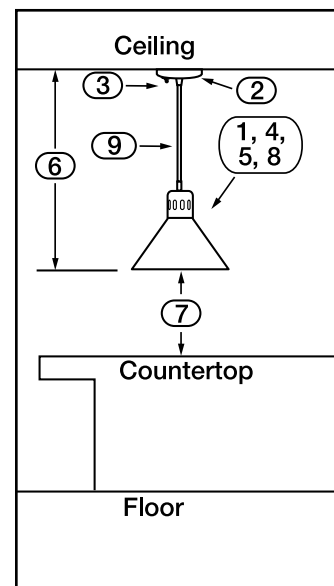

Decorative Lamps/ Luminaires

Hatco Decorative Lamps provide radiant heat to briefly hold food warm at kitchen work areas, wait staff pickup stations or customer serving points, while enhancing your décor. Versatile enough for any location, the range of lights are available with a selection of personalized choices: shade styles, colors, switch locations and mounting arrangements. Configurations for lighting (Luminaire), as well as foodwarming, are available.


NOTE: Decorative Lamps and Luminaires are non-returnable.

- Decorative Lamps and Luminaires available in fourteen (14) shade styles
- Eight (8) different mounting arrangements to choose from
- Available in seven (7) *Designer* colors, seven (7) Gloss finishes and six (6) Plated finishes
- Four (4) power switch options:
 - ~ Upper (on canopy)
 - ~ Lower (at stem)
 - ~ Remote
 - ~ None
- Low, standard and high watt bulbs available
- Available for food holding and display or lighting only applications

Various cord lengths available, starting at 17" to desired length, while rigid and retractable can vary

Black cord is standard (white cord optional)

Rigid Stem Mount in unit color (except for Gloss finishes Radiant Red, Brilliant Blue and Clear Brushed Metal)

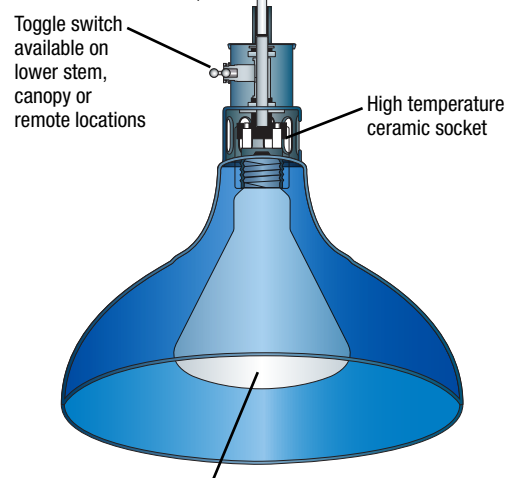

Bulbs for:
 60W in clear coated (Luminaire only)
 250W (DL models) or 375W (DLH models) in clear, coated or uncoated
 250W (DL models) in red, coated or uncoated

Build A Decorative Lamp

Hatco has given you a variety of simple and easy ways to "Build Your Decorative Lamp." You can go online or quickly do the work tables of "How to Build Your Lamp" on pages 4 through 6.


- GO online at: www.hatcocorp.com and click on "Build a Lamp." (*Download a PDF of your lamp configuration in color and a Hatco List Price Quote*)
- OR follow the six steps in the Hatco Brochure (next three pages) to build your Hatco model code. Then look at the following page for the accessories, like a bulb or track, to easily complete your total order.



Now you can develop your own Hatco Decorative Lamp solutions with our online lamp configurator.

Visit www.hatcocorp.com & click on "Build a Lamp"

HOW TO BUILD A LAMP



Specify the following options when ordering:

1 Electrical	DLH	(High watt - 375 watt max)	<input type="text"/>
2 Mounting Style	C	(Cord mount)	<input type="text"/>
3 Switch Location	R	(Remote switch location)	<input type="text"/>
4 Shade Style	-775	(Shade style)	<input type="text"/>
5 Shade Color	BBRASS	(Bright Brass Plated finish)	<input type="text"/>
6 Overall Length	80"	(Overall length) – Only C mounts & over 72"	<input type="text"/>

(Specify to the nearest inch – CL, CU, CT, PL, PU, SL, SU, ST mounts only). **TOTAL \$**

Information indicated in red are items that the customer should enter.

Bulbs are not included.



Build A Decorative Lamp Configurator Worksheet

Complete the six steps on this worksheet to configure your Hatco model code. In order to get exactly what you need in the least amount of time, have this handy when ordering your Hatco Decorative Lamp.



BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEPS 1 AND 2
(To determine your total list price and model code, pick all your options - bulb not included)

STEP 1: ELECTRICAL

Voltage 120

Wattage –

DL 200 Watt max (Luminaire)
DL 250 Watt max (Standard)
DLH 375 Watt max (High)

See Price List

STEP 2: MOUNTING STYLE

Mounting Style –

A Arm
P Pivot
C Cord (specify Cord Color)
CT * Cord to Track Adapter (specify Cord and Track Color)
R Retractable (specify Cord Color)
RT * Retractable to Track Adapter (specify Cord and Track Color)
S Stem
ST * Stem to Track Adapter

See Price List

*** NOTE:** Lamp shade diameter and wattage may limit number of Lamps per track. To ensure warranty coverage, do not install track systems in damp or wet locations (including above steam tables).

Go to next page for Steps 3-4.

NOTE: Decorative Lamps and Luminaires are non-returnable.

D L X - X X X X - X X X	
Decorative Lamp	Switch Location
H = High Wattage	Mounting Style
No Character = Standard Wattage or Luminaire	Shade Style

	MOUNTING STYLES	SPECIFY:	Shade Height	
			8½" H	10½" H
ARM	A Mount Rigid Mount to canopy with pivot. 	Horizontal Stem Length	7 to 20"	
		Overall Length	Overall Length: 17" to 30"	Overall Length: 19" to 32"
PIVOT	P Mount Rigid Mount to canopy with pivot. 	Overall Length (from pivot to bottom of shade)	17" to 71"	19" to 73"
CORD	C Mount Cord Mount to canopy. 	Overall Length	17" to any length	19" to any length
	CT Mount* Cord Mount to track adapter. 			
RETRACTABLE CORD	R Mount Retractable Cord Mount. 	Overall Length Adjusts to a maximum and minimum according to shade height	31" to 69½"	33" to 71½"
	RT Mount* Retractable Cord Mount to track adapter. 		33⅜" to 71⅞"	35⅜" to 73⅞"
STEM	S Mount Rigid Stem Mount to canopy. 	Overall Length	14" to 71"	16" to 73"
	ST Mount* Rigid Stem Mount to track adapter. 		17" to 71"	19" to 73"


Build A Decorative Lamp Configurator Worksheet

Continued from page 4



BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEPS 3 AND 4
(To determine your total list price and model code, pick all your options - bulb not included)


SWITCH LOCATIONS



L - Lower Switch


Not available on:

- DLH (high watt models)
- A mount



R - Remote Switch

- Accommodates 16 amps
- Up to seven (7) 250W Lamps, or five (5) 375W Lamps maximum per remote switch



U - Upper Switch

Not available on:

- DLH (high watt models)
- R mount
- Track mounts (CT, RT, ST)


STEP 3: SWITCH LOCATION

Switch Location –

See Price List

L	Lower (not available on High Watt models)
N	None
R	Remote
U	Upper (not available on High Watt models)

SHADE STYLES (height and width shown)

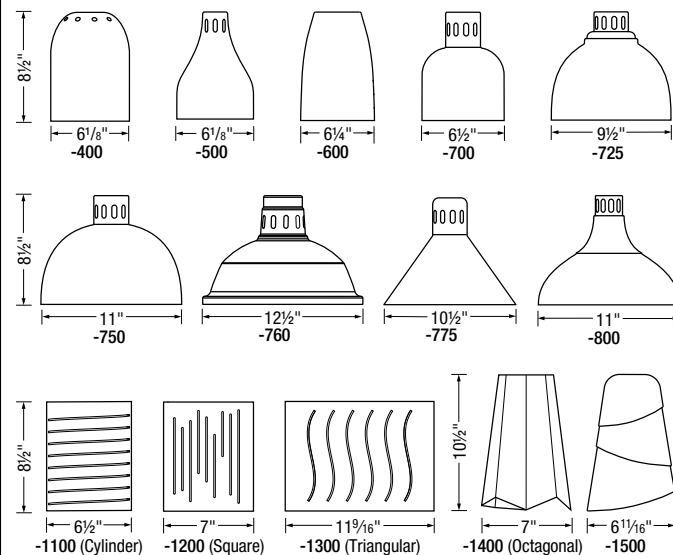

STEP 4: SHADE STYLE

Shade Code* –

See Price List

-400
-500
-600
-700
-725
-750
-760
-775
-800
-1100
-1200
-1300
-1400
-1500

* Ship weight is 6-10 lbs., depending on components.

Go to next page for Steps 5-6.

NOTE: Decorative Lamps and Luminaires are non-returnable.

DLX - XXXX - XXX

Decorative Lamp

H = High Wattage
No Character =
Standard Wattage
or Luminaire

Switch Location

Mounting Style

Shade Style



Build A Decorative Lamp Configurator Worksheet

Continued from page 5

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEP 5 AND 6

(To determine your total list price and model code, pick all your options - bulb not included)



Visit www.hatcocorp.com & click on "Build a Lamp"

STEP 5: SHADE AND CANOPY COLORS

Shade and Canopy Colors –

See Price List

Designer Colors

RED	Warm Red	NAVY	Navy Blue
BLACK	Black	GREEN	Hunter Green
GRAY	Gray Granite	COPPER	Antique Copper
WHITE	White Granite		

Gloss Finishes

SWHITE	Smooth White	GGRAY	Glossy Gray
GGOLD	Gleaming Gold	BBLACK	Bold Black

Shade Finish Only (must choose other finish for remainder of unit) –

Special Process Required and Extended Lead Times –

RRED	Radiant Red
BBLUE	Brilliant Blue
CL-COAT	Clear Brushed Metal

Plated Finishes

Special Process Required and Extended Lead Times –

BBRASS	Bright Brass
BNICKEL	Bright Nickel
BCOPPER	Bright Copper
ANICKEL	Antique Nickel
ABRASS	Antique Brass
ABRONZE	Antique Bronze

SHADE AND CANOPY COLORS

Designer Colors



Gloss Finishes



Gloss Finishes for Shade Only – Special Process Required and Extended Lead Times



Printed colors are a representation and may not exactly match our Designer, Gloss and Plated Finishes.

Plated Finishes – Special Process Required and Extended Lead Times



Exception: DL-1500 for Shade Only –



*Gloss and Plated Finishes – Special Process Required and Extended Lead Times

STEP 6: OVERALL LENGTH

Overall Length – For C, CT, S or ST Mounts, from ceiling to bottom of warmer lamp shade. For A or P Mounts, from center of shade to wall plus vertical shade length (specify exact length in whole numbers).


Up to 72"	See Price List
Greater than 72" (C Mount only)	See Price List

YOUR TOTAL LIST PRICE AND MODEL CODE

Add the total costs of options below (not for retrofit – bulb not included) –

Step 1	Electrical	
Step 2	Mounting Style	
Step 3	Switch Location	
Step 4	Shade Style	
Step 5	Shade and Canopy Colors	
Step 6	Overall Length	

Your Total Price \$





BULBS AND ACCESSORIES – PAGE 7

NOTE: Decorative Lamps and Luminaires are non-returnable.



TRACK INSTALLATION AND MODIFICATION KIT – Highlighted components (for cutting Track Length into multiple sections)

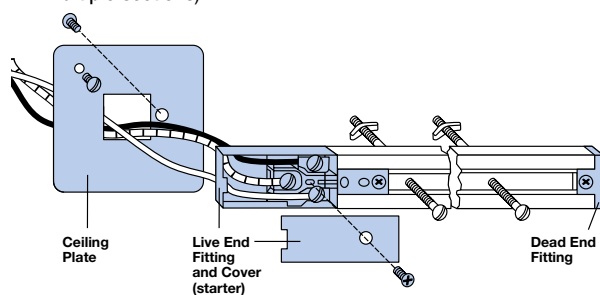

OPTIONS (available at time of purchase only)

DL-CORD-BK Black Cord – Standard (C = Cord, R = Retractable Mounts only)

DL-CORD-WHITE White Cord (C = Cord, R = Retractable Mounts only)

Leads – For any SL, SR or SU Mount units, must specify Lead Length –

LEADS5 1'-5' Extended Electrical Leads

LEADS10 6'-10' Extended Electrical Leads

LEADS15 11'-15' Extended Electrical Leads

LEADS20 16'-20' Extended Electrical Leads

ACCESSORIES (available for purchase at any time)

DL-TRACK-4B 4' Track Mount Bar, Black†

DL-TRACK-4W 4' Track Mount Bar, White†

DL-TRACK-8B 8' Track Mount Bar, Black†

DL-TRACK-8W 8' Track Mount Bar, White†

DL-TRACK-12B One 8' plus one 4' Track Mount Bar with Coupler, Black†

DL-TRACK-12W One 8' plus one 4' Track Mount Bar with Coupler, White†

DL-TRACK-16B Two 8' Track Mount Bars with Coupler, Black†

DL-TRACK-16W Two 8' Track Mount Bars with Coupler, White†

DL-TRACKBLK Additional Track Installation and Modification Kit (includes Ceiling Plate, Live End Fitting and Cover [Starter] and Dead End Fitting) – Black (for cutting Track Length into multiple sections, see above)

DL-TRACKWHT Additional Track Installation and Modification Kit (includes Ceiling Plate, Live End Fitting and Cover [Starter] and Dead End Fitting) – White (for cutting Track Length into multiple sections, see above)

DL-SWITCH-16AMP 16 Amp Lamp Toggle Switch

WHITE-CTD-120L 120V, 60W Clear Bulb, Coated (Luminaire models only)

WHITE-UCTD-120 120V, 250W Clear Bulb, Uncoated

WHITE-UCTD-120H 120V, 375W Clear Bulb, Uncoated (High Watt models only)

WHITE-CTD-120 120V, 250W Clear Bulb, Coated


WHITE-CTD-120H 120V, 375W Clear Bulb, Coated (High Watt models only)

RED-UCTD-120 120V, 250W Red Bulb, Uncoated


RED-CTD-120 120V, 250W Red Bulb, Coated

† Tracks may be cut to fit any length by installer. Modification kits available.

† Maximum seven (7) 250 watt lamps or five (5) 375 watt lamps per 20 amp Track Bar Circuit. Maximum 1920 watts or 16 amps per any length track. Installer is responsible for properly sizing the supply circuit and the lamp load. Lamp shade diameter and wattage may limit number of lamps per track.



DL-TRACK-12W
Closeup of channel side



DL-TRACKBLK



DL-TRACKWHT



RED uncoated, **WHITE** uncoated,
RED coated, **WHITE** coated



NOTE: Decorative Lamps and Luminaires are non-returnable.



Decorative Lamp & Display Light Solutions

Glo-Rite® Curved Display Lights

A stylish choice for illuminating your serving area. The Glo-Rite® Curved Display Light offers the highest light output that is ideal for illuminating food products with either a warm white light (3050K) or a cool or neutral white light (4100K).

The sleek, curved design is patented and the LED lighting delivers significant savings with lower energy consumption and greater reliability.

Hatco provides you with a wide variety of colors and lengths for any serving area.

- Features a patented curved housing design with energy efficient dual LED lights across the display lamp that provide longer performance and energy savings (compared to standard incandescent bulbs)
- Lengths available from 18"-72" in 6" increments
- Field replaceable dual LED lights

- Matches the Hatco line of Glo-Ray® Curved Infrared Strip Heaters for a fully integrated look
- Angle brackets (Black only) and 6" power leads are standard
- Optional non-adjustable tubular stands available



HL5-36
Clear Anodized (standard) shown in top and underside views

GLO-RITE® CURVED DISPLAY LIGHTS

Model	Width	Voltage Single Phase	kW	Ship Weight*
Standard Watt				
HL5-18	18"	120	4.3	9 lbs.
HL5-24	24"	120	5.9	10 lbs.
HL5-30	30"	120	7.6	11 lbs.
HL5-36	36"	120	9.2	12 lbs.
HL5-42	42"	120	10.8	13 lbs.
HL5-48	48"	120	12.4	14 lbs.
HL5-54	54"	120	14.0	15 lbs.
HL5-60	60"	120	15.7	16 lbs.
HL5-66	66"	120	17.3	17 lbs.
HL5-72	72"	120	18.9	18 lbs.

* Weights do not include shipping materials.

All Curved Display Light Models Feature:

Voltage: 120, single phase.

Models Shipped with: Black end panels and angle brackets with rocker switch under unit on power side.

Leads: 6" leads – on power side.

Dimensions: 18"-72"W x 6"D x 3"H (height includes standard angle bracket).

ONE (1) YEAR ON-SITE PARTS AND LABOR.

HL5 - XX
Glo-Rite Curved Display Light Aluminum Housing — Width (Inches)

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Standard –

RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper

Gloss Finishes – Non-standard colors are non-returnable –

GGOLD	Gleaming Gold
GGRAY	Glossy Gray
BBLACK	Bold Black
RRED	Radiant Red
BBLUE	Brilliant Blue

COLORS AND FINISHES - PAGE 12

OPTIONS (available at time of purchase only)

Leads (must specify Lead Length) –

HL5-LEAD5	5' total Power Lead Length (includes a 3' Conduit)
HL5-LEAD6	6' total Power Lead Length (includes a 3' Conduit)
HL5-LEAD7	7' total Power Lead Length (includes a 3' Conduit)
HL5-LEAD8	8' total Power Lead Length (includes a 3' Conduit)
HL5-LEAD9	9' total Power Lead Length (includes a 3' Conduit)
HL5-LEAD10	10' total Power Lead Length (includes a 3' Conduit)
HL5-CORD	6' Cord & Plug Set (NEMA 5-15P)
NLT5-10, -12	Non-Adjustable Tubular Stands (specify 10" or 12" clearance)
NLT5-14, -16	Non-Adjustable Tubular Stands (specify 14" or 16" clearance)
	Designer Color or Gloss Finish for Non-Adjustable Tubular Stands –
NLT5-PAINT	Non-standard colors are non-returnable –

LED Lights –

HL5-3050	Warm White (3050K)
HL5-4100	Cool or Neutral White (4100K)

Narrow Xenon Display Lights

Narrow Display Lights are Hatco's slim style that is ideal for installation in tight spaces, with a height of only 2 1/8" and 4" depth. The xenon light bulbs provide bright display lighting that brings focus on the product below.

- Available in widths from 18" to 72"
- Supplied with non-adjustable 1 1/2" angle brackets for under-shelf mounting
- Control is housed in a remote-mounted control box with an On/Off toggle switch or optional dimmer switch and two conduits with 6" leads
- Optional *Designer* powdercoated colors, Gloss finishes and Stainless Steel housing available

NLX-36 in *Designer* Black shown with angle brackets



Remote-mounted control box with toggle switch



Optional remote-mounted control box with dimmer switch

NARROW XENON DISPLAY LIGHTS

Model	Voltage		No. of Bulbs	Width	Watts	Ship Weight
	Single Phase					
NLX-18	120	2	18"	100	7 lbs.	
NLX-24	120	3	24"	150	9 lbs.	
NLX-30	120	3	30"	150	11 lbs.	
NLX-36	120	5	36"	250	13 lbs.	
NLX-42	120	5	42"	250	13 lbs.	
NLX-48	120	5	48"	250	14 lbs.	
NLX-54	120	7	54"	350	16 lbs.	
NLX-60	120	7	60"	350	18 lbs.	
NLX-66	120	9	66"	450	20 lbs.	
NLX-72	120	9	72"	450	21 lbs.	

All Narrow Xenon Display Light Models Feature:

Leads: 6" leads.

Models Shipped with: Two (2) 3' conduits both with 6" leads on the control box, angle brackets and remote mounted control box with toggle switch.

Dimensions: 18" to 72"W x 4"D x 2 1/8"H.

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –

RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper

Gloss Finishes – Non-standard colors are non-returnable –

SWHITE	Smooth White
GGOLD	Gleaming Gold
GGRAY	Glossy Gray
BBLACK	Bold Black

Gloss Finishes – Non-standard colors are non-returnable –

RRED*	Radiant Red
BBLUE*	Brilliant Blue

Non-standard colors are non-returnable –

SS	Stainless Steel
----	-----------------

* Special process required.

OPTIONS (available at time of purchase only)

Extended Electrical Leads (must specify Lead Length) –

LEADS5	1'-5'
LEADS10	6'-10'
LEADS15	11'-15'
LEADS20	16'-20'
NO CONTROL	No Control included
NTL-10, -12	Non-Adjustable Tubular Stands (specify 10" or 12" clearance)
NTL-14, -16	Non-Adjustable Tubular Stands (specify 14" or 16" clearance)
NTL-PAINT	Designer Color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –
NLX-DIM	Dimmer Switch (in Control Box)


Control Box Bezel – Designer Colors – Non-standard colors are non-returnable –

RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper

COLORS AND FINISHES - PAGE 12



Optional remote-mounted control box with dimmer switch (control box bezel shown in *Designer* Black)





Decorative Lamp & Display Light Solutions

Glo-Rite® Display Lights

Let the light shine on your work surface or display areas with the Glo-Rite® Display Lights. Durable and effective, Hatco light strips are made of extruded aluminum housings with bright-annealed reflectors for maximum brightness.

- Extruded aluminum housings
- Incandescent bulbs with special protective coating to guard against food contamination
- Bright-annealed reflectors for maximum brightness
- Extra lamps available on models from 24" to 72"
- Optional *Designer* colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper



HL-24-2 including extra lamp assembly with lamps on 12" centers – standard

GLO-RITE® DISPLAY LIGHTS

Model	Voltage Single Phase	No. of Bulbs	Width	Watts*	Ship Weight
HL-18	120	2	18"	120	6 lbs.
HL-24	120	2	24"	120	7 lbs.
HL-24-2	120	3	24"	180	6 lbs.
HL-30	120	2	30"	120	7 lbs.
HL-30-2	120	4	30"	240	8 lbs.
HL-36	120	3	36"	180	8 lbs.
HL-36-2	120	5	36"	300	9 lbs.
HL-42	120	3	42"	180	10 lbs.
HL-42-2	120	6	42"	360	10 lbs.
HL-48	120	4	48"	240	11 lbs.
HL-48-2	120	7	48"	420	12 lbs.
HL-54	120	4	54"	240	12 lbs.
HL-54-2	120	8	54"	480	13 lbs.
HL-60	120	5	60"	300	13 lbs.
HL-60-2	120	9	60"	540	13 lbs.
HL-66	120	5	66"	300	14 lbs.
HL-66-2	120	10	66"	600	15 lbs.
HL-72	120	6	72"	360	18 lbs.
HL-72-2	120	10	72"	600	22 lbs.

* With 60 watt bulb.

All Display Light Models Feature:

Toggle Switch (max. 15 amps) Location: Chef's left side (unless otherwise specified).

Leads: 6" leads – server's right.

Dimensions: 3"D x 2½"H.

OPTIONS (available at time of purchase only)

HAL	Halogen Bulb in lieu of standard Display Light (60 Watt)
HL-40W	40 Watt Bulb in lieu of standard Display Light
NO BULB	No Bulb
REM TOG	Remote Toggle Switch (max. 15 Amps)

Leads (must specify Lead Length) –

LEADS5	1'-5' Extended Electrical Leads
LEADS10	6'-10' Extended Electrical Leads
LEADS15	11'-15' Extended Electrical Leads
LEADS20	16'-20' Extended Electrical Leads

ACCESSORIES (available for purchase at any time)

HL-BRKT	Adjustable Angle Bracket
---------	--------------------------

LED Bulbs (120V) –



CLED-2700-120	Chef LED Bulb (emulates incandescent)
CLED-3000-120	Chef LED Bulb (emulates halogen)
CLED-4000-120	Chef LED Bulb (emulates fluorescent)

COLORS AND FINISHES - PAGE 12

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –

RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper

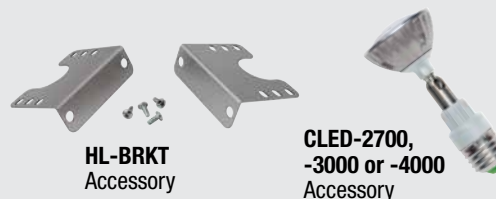



Save money lighting your
Hatco Glo-Ray® Strip Heater



GREEN ENERGY

Commit to going green in your foodservice operation with Hatco Corporation's new patented Chef LED Bulbs! Made of shatterproof polycarbonate, which encases the LED bulb mechanism, the Chef LED Bulbs have substantial benefits and energy savings over other bulbs. These bulbs are designed to be used in select Hatco Strip Heater models and are directional, so you can adjust it to your ideal setting. Other features include:

- Average of 49% increased light output, based on Foot Candle average delivered to surface
- Unique design allows operation over a steam table
- Up to 92% energy savings versus 60 watt incandescent or halogen bulb
- 120V offering
- Warrantied for one year



Go to www.hatcocorp.com and download the LED Cost Savings & Energy Analysis calculator to review your energy savings potential.



Scan to see how easy it is to install the Chef LED bulb, and direct the light, in your foodwarmer.



CLED-2700
(Warm Light)

4.5 watt

25,000 Hours

Closest kelvin
Incandescent



CLED-3000
(Warm Light)

4.5 watt

25,000 Hours

Closest kelvin
Halogen



CLED-4000
(Cool Light)

4.5 watt

25,000 Hours

Closest kelvin
Flourescent Tube

BULB:
Halogen

60 watt

1,500 Hours

BULB:
Incandescent*

60 watt

3,000 Hours

*Appliance bulb

Used in HL, GRAL, GRAHL, GRAL-xxD, GRAIHL, GR2AL, GR2AHL & GR2AL-xxD models, see accessories.
Please contact factory for the most up-to-date listing of models that can use Chef LED Bulbs.




DL-1200-SR in Gloss finish Clear Brushed Metal




Paint Chip Sample Colors

DESIGNER COLORS

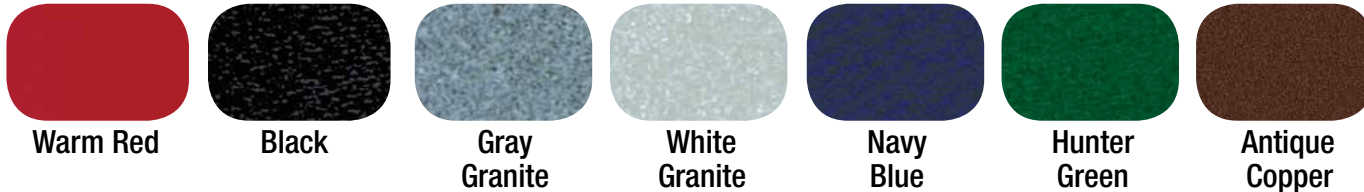

GLOSS FINISHES

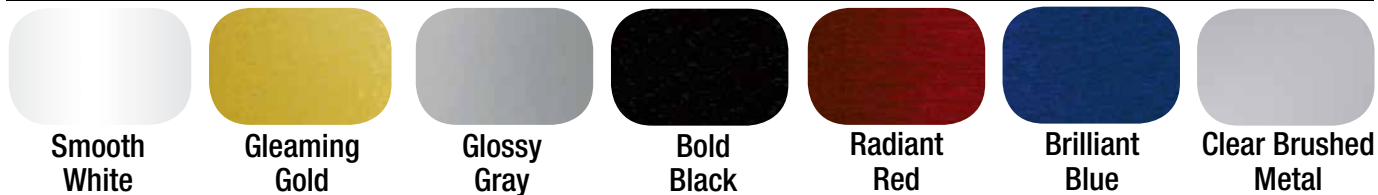

PLATED FINISHES



*Colors are a representation and may not exactly match our colors.
Consult factory for possible color matching options on these colors.
Non-standard colors are non-returnable.*

To order a Hatco Paint Chip & Stone Sample Colors Sheet, visit www.hatcocorp.com / Order Literature / Sales Literature / Sell Sheets.



Scan with web-enabled
mobile device to visit
www.hatcocorp.com

Hatco Corporation

P.O. BOX 340500 | Milwaukee, WI 53234-0500 USA

800-558-0607 | 414-671-6350

www.hatcocorp.com | support@hatcocorp.com