



Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

# Flav-R-Savor® Heated Air Curtain Cabinets

Models: FS2HAC-15, -2PT, -4PT

The patented Hatco Flav-R-Savor® Heated Air Curtain effectively and safely holds hot food hot without the use of doors allowing immediate access to product.

The models have warm air at the front and back of the cabinet which is forced downward through the ducts above the opening which forms a “curtain” of heated air. A portion of the heated air is drawn toward the center and sides of the cabinet warming each pan evenly.

The pass through units are ideal for holding wrapped product like tortillas, burritos and ribs, as well as product on sheet pans like biscuits, chicken, hamburger patties, pizza and baked potatoes. Holding temperatures range from 80°F to 200°F (27°- 93°C).

The smaller, single opening unit is perfect for those custom food orders that are assembled with pre-prepared food items. Holding them ready and warm.

## Standard features

- Patented air baffle and duct design create consistent temperature and peak product holding on each pan
- Doorless design allows easy access to food product from both sides (excludes FS2HAC-15)
- FS2HAC-15 is a single opening specialty warmer that includes a removable nickel plated wire rack that holds six (6) 1/3 size pans (pans not included). Also includes a removeable crumb tray, USB port and a touch screen control with temperature and timer display
- FS2HAC-2PT accommodates two (2) full-size sheet pans or four (4) half-size sheet pans and an exterior that comes standard in *Designer Black* ■
- FS2HAC-4PT accommodates four (4) full-size sheet pans or eight (8) half-size sheet pans and an exterior that comes standard in *Designer Black* ■



FS2HAC-2PT with accessory full size sheet pans



FS2HAC-15 with standard wire rack (food pans not included)



FS2HAC-4PT with accessory full size sheet pans



■ IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See [www.hatcocorp.com/antimicrobial-paint](http://www.hatcocorp.com/antimicrobial-paint) for more information.



For operation, location and safety information, please refer to the Installation and Operating Manual.



(CE & UKCA for FS2HAC-2PT, -4PT)



HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350




[www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Patents](#) | [Chat](#)



# Flav-R-Savor® Heated Air Curtain Cabinets

Models: FS2HAC-15, -2PT, -4PT

## FS2HAC-15

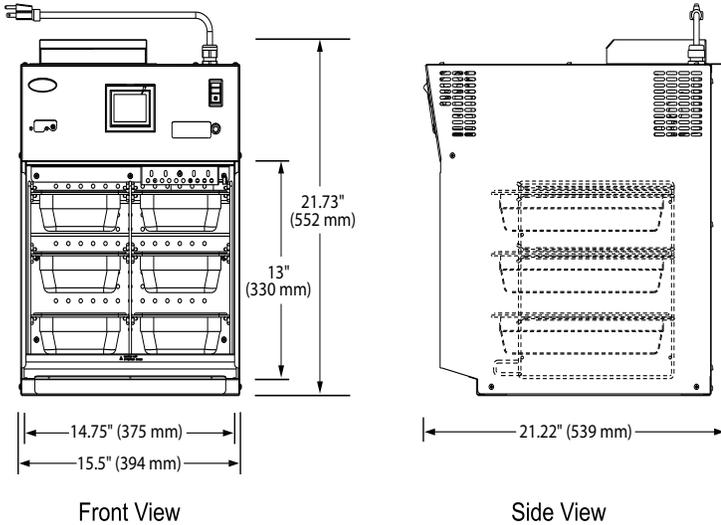

## SPECIFICATIONS Heated Air Curtain Cabinets

The shaded areas contain electrical information for International models

| Model     | Type                 | Dimensions (W x D x H)<br><i>Height includes legs</i> | Volts       | Hz    | Watts | Amps        | Plug        | Approx. Ship Weight |
|-----------|----------------------|---|-------------|-------|-------|-------------|-------------|---------------------|
| FS2HAC-15 | Open Capacity Warmer | 15.5" x 21.22" x 21.73"<br>(394 x 539 x 552 mm)       | 120         | 50-60 | 1105  | 9.2         | NEMA 5-15P* | 83 lbs. (38 kg)     |
|           |                      |   | 220/230/240 | 60    | 1105  | 5.0/4.8/4.6 | AS 3112     |                     |


\* Canada, use NEMA 6-15P.

## CORD LOCATION


Top of unit towards the back, right side.

## PLUG CONFIGURATIONS


NEMA 5-15P



NEMA 6-15P



AS 3112



HATCO CORPORATION

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)


[Chat](#)




# Flav-R-Savor® Heated Air Curtain Cabinets

Models: FS2HAC-15, -2PT, -4PT

## FS2HAC-2PT

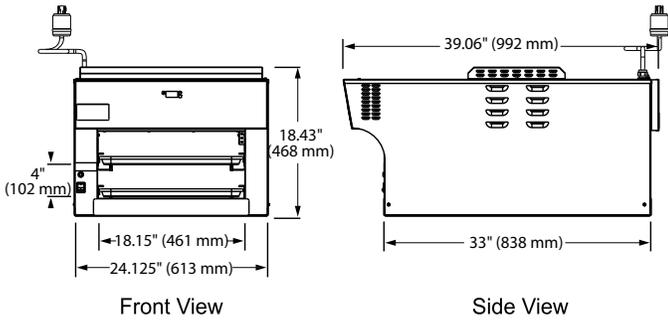

## FS2HAC-4PT

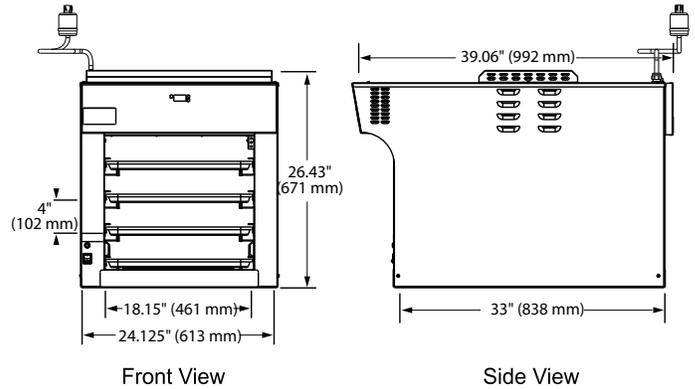

## SPECIFICATIONS Heated Air Curtain Cabinets

The shaded areas contain electrical information for International models


| Model        | Type                | Dimensions (W x D x H)<br><i>Height includes legs</i> | Volts        | Hz                       | Watts     | Amps      | Plug                                | Approx. Ship Weight |
|--------------|---------------------|---|--------------|--------------------------|-----------|-----------|-------------------------------------|---------------------|
| FS2HAC-2PT↓  | 2-Tier Pass-Through | 24.125" x 39.06" x 18.43"<br>(613 x 922 x 468 mm)     | 120/208      | 60                       | 2589      | 10.8      | NEMA L14-20P                        | 175 lbs. (80 kg)    |
|              |                     |   | 120/240      | 60                       | 2589      | 10.8      | NEMA L14-20P                        |                     |
|              |                     |   | 220          | 60                       | 2538      | 11.5      | NEMA 6-20P, CEE 7/7 Schuko, BS-1363 | 175 lbs. (80 kg)    |
|              |                     |   | 240          | 60                       | 3022      | 12.6      | NEMA 6-20P                          |                     |
|              |                     |   | 220-230 (CE) | 50                       | 2538-2774 | 11.5-12.0 | CEE 7/7 Schuko, CEE 17, AS 3112     |                     |
| 230-240 (CE) | 50                  | 2774-3022   | 12.1-12.6    | BS-1363, CEE 17, AS 3112 |           |           |                                     |                     |
| FS2HAC-4PT↓  | 4-Tier Pass-Through | 24.125" x 39.06" x 26.43"<br>(613 x 922 x 671 mm)     | 120/208      | 60                       | 3389      | 14.2      | NEMA L14-20P                        | 211 lbs. (96 kg)    |
|              |                     |   | 120/240      | 60                       | 3389      | 14.2      | NEMA L14-20P                        |                     |
|              |                     |   | 220          | 60                       | 3338      | 15.2      | NEMA 6-20P, CEE 7/7 Schuko, No Plug | 211 lbs. (96 kg)    |
|              |                     |   | 240          | 60                       | 3362      | 14        | NEMA 6-20P                          |                     |
|              |                     |   | 220-230 (CE) | 50                       | 3338-3646 | 15.2-15.9 | CEE 7/7 Schuko, CEE 17, No Plug     |                     |
| 230-240 (CE) | 50                  | 3080-3362   | 13.4-14.0    | CEE 17, AS 3112, No Plug |           |           |                                     |                     |

↓ Height includes 4" legs.

## CORD LOCATION

Top of unit towards the back, left side.

## PLUG CONFIGURATIONS

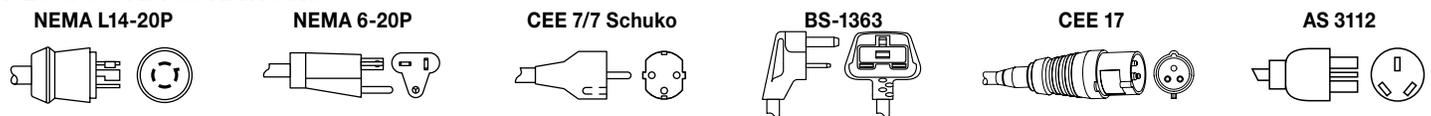

## PRODUCT SPECS Heated Air Curtain Cabinets

The patented Heated Air Curtain Cabinet shall be a Flav-R-Savor® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Heated Air Curtain shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width. It shall consist of a powdercoated steel housing (excluding FS2HAC-15), stainless steel front panel, and metal sheathed heating

elements. Heated Air Curtain features easy-to-use digital controls, an On/Off switch, (FS2HAC-15 has a USB port), and 6' (1829 mm) cord with plug.

Accessories shall include legs and food pans.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Patents](#) | [Chat](#)