



Project \_\_\_\_\_  
Item # \_\_\_\_\_  
Quantity \_\_\_\_\_


## Cold Simulated Stone\* Shelves Built-In

Models: CSSB-2418, -3018, -3618, -4818  
CSSBF-24-F, -24-I, -24-S, -36-F, -36-I, -36-S,  
-48-F, -48-I, -48-S

Hatco's new Cold Simulated Stone\* Shelves are a must for buffet lines in cafeterias, restaurants and much more! These sturdy, foodsafe shelves are available in three attractive decorative stone colors.

### Standard features

- Thermal break reduces condensation and temperature transfer (patent pending)
- Long, flexible refrigerant line (ability to pullout condensing unit) for service
- The CSSB Cold Simulated Stone\* Shelves Built-In match the GRSSB Heated Simulated Stone\* Built-In Shelves for a fully integrated look
- Both CSSB and CSSBF models are bottom mount units
- Models shipped with Electronic Temperature Control and Condensing Unit
- Control box can be mounted on the front of the cabinet, 4' (1219 mm) from center of shelf
- Condensing unit may be mounted up to 4' (1219 mm) away from the center of shelf
- Shelf construction utilizes R-404A refrigerant
- Easy serviceability with a sight glass, service valves, dryer/filter, and a receiver

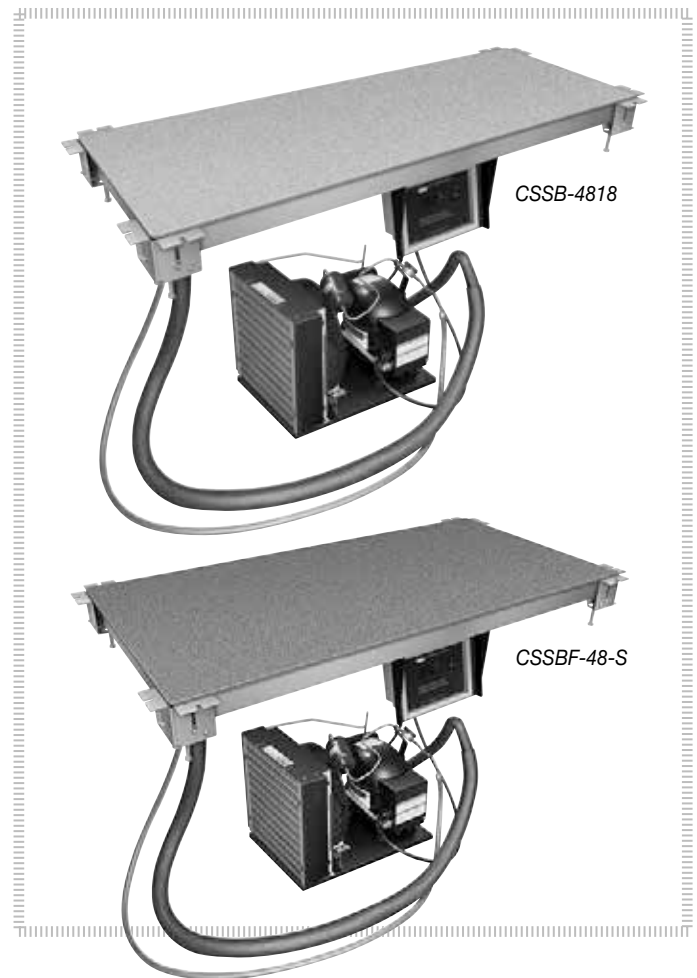


### Options (available at time of purchase only)

- Simulated stone\* base color – Non-standard colors are non-returnable  
☐ Gray Granite ☐ Bermuda Sand ☐ Night Sky (standard)  
☐ Additional four year parts only warranty on the compressor available at time of purchase (U.S. and Canada only)

### Accessories

- ☐ Silicone gasket for simulated stone\* installation
- ☐ Silicone gasket and black silicone for simulated stone\* installation
- ☐ Silicone gasket and gray silicone for simulated stone\* installation

\* Models with simulated stone are Swanstone®



**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
(800) 558-0607 | (414) 671-6350 | [www.hatcocorp.com](http://www.hatcocorp.com) | [equipsales@hatcocorp.com](mailto:equipsales@hatcocorp.com) | [intlsales@hatcocorp.com](mailto:intlsales@hatcocorp.com)




# Cold Simulated Stone\* Shelves Built-In

Models: CSSB-2418, -3018, -3618, -4818

CSSBF-24-F, -24-I, -24-S, -36-F, -36-I, -36-S, -48-F, -48-I, -48-S

## CSSB, CSSBF

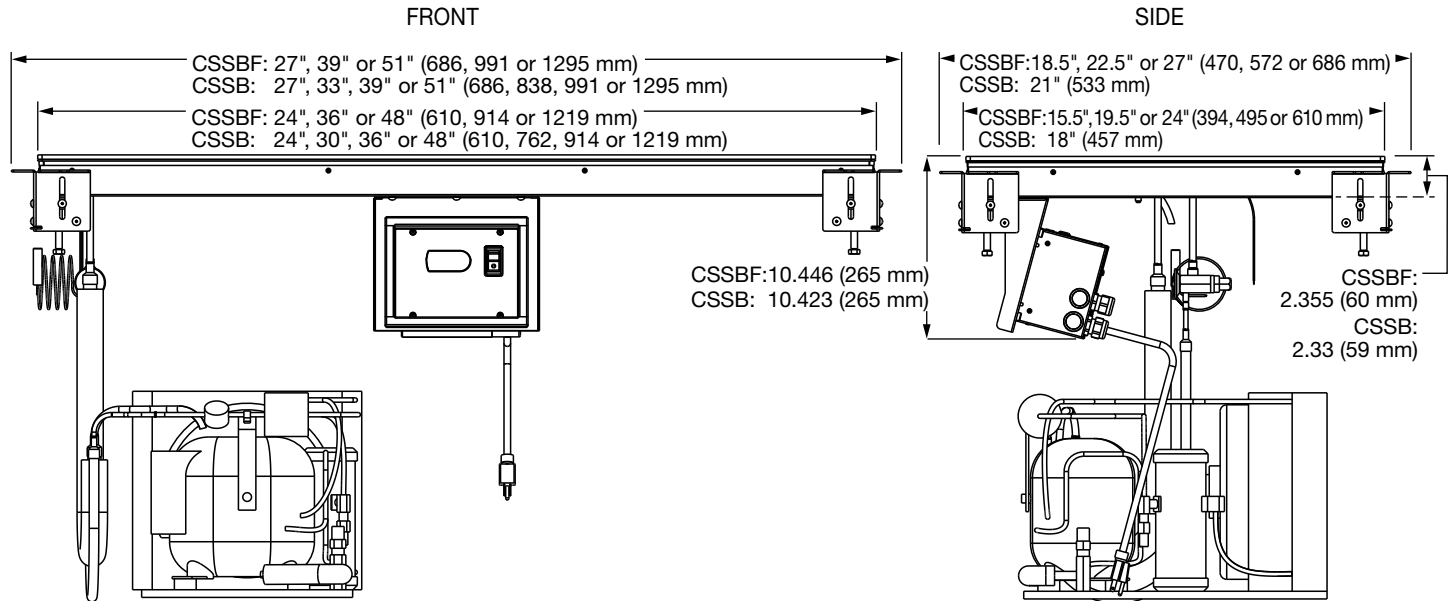

## SPECIFICATIONS

### Cold Simulated Stone\* Built-In Shelf – Flush Top

The shaded areas contain electrical information for international models

| Model      | Dimensions (W x D of cooled surface) | Comp. Size (HP) | Volts* | Watts | Amps | Hz | Plug                               | Approx. Ship Weight |
|------------|--------------------------------------|-----------------|--------|-------|------|----|------------------------------------|---------------------|
| CSSBF-24-F | 24" x 15.5"<br>(610 x 394 mm)        | 1/4             | 120    | 804   | 6.7  | 60 | NEMA 5-15P                         | 114 lb.<br>(52 kg)  |
|            |                                      | 1/3             | 220    | 616   | 2.8  | 50 | CEE 7-7 Schuko,<br>BS-1363, AS3112 |                     |
|            |                                      |                 | 230    | 667   | 2.9  |    |                                    |                     |
|            |                                      |                 | 240    | 744   | 3.1  |    |                                    |                     |
|            |                                      |                 | 208    | 613   | 2.9  | 60 | BS-1363                            |                     |
|            |                                      |                 | 220    | 686   | 3.1  |    |                                    |                     |
|            |                                      |                 | 230    | 749   | 3.3  |    |                                    |                     |
|            |                                      |                 | 240    | 816   | 3.4  |    |                                    |                     |
| CSSBF-24-I | 24" x 19.5"<br>(610 x 495 mm)        | 1/4             | 120    | 804   | 6.7  | 60 | NEMA 5-15P                         | 124 lb.<br>(56 kg)  |
|            |                                      | 1/3             | 220    | 616   | 2.8  | 50 | CEE 7-7 Schuko,<br>BS-1363, AS3112 |                     |
|            |                                      |                 | 230    | 667   | 2.9  |    |                                    |                     |
|            |                                      |                 | 240    | 744   | 3.1  |    |                                    |                     |
|            |                                      |                 | 208    | 613   | 2.9  | 60 | BS-1363                            |                     |
|            |                                      |                 | 220    | 686   | 3.1  |    |                                    |                     |
|            |                                      |                 | 230    | 749   | 3.3  |    |                                    |                     |
|            |                                      |                 | 240    | 816   | 3.4  |    |                                    |                     |
| CSSBF-24-S | 24" x 24"<br>(610 x 610 mm)          | 1/4             | 120    | 804   | 6.7  | 60 | NEMA 5-15P                         | 134 lb.<br>(61 kg)  |
|            |                                      | 1/3             | 220    | 616   | 2.8  | 50 | CEE 7-7 Schuko,<br>BS-1363, AS3112 |                     |
|            |                                      |                 | 230    | 667   | 2.9  |    |                                    |                     |
|            |                                      |                 | 240    | 744   | 3.1  |    |                                    |                     |
|            |                                      |                 | 208    | 613   | 2.9  | 60 | BS-1363                            |                     |
|            |                                      |                 | 220    | 686   | 3.1  |    |                                    |                     |
|            |                                      |                 | 230    | 749   | 3.3  |    |                                    |                     |
|            |                                      |                 | 240    | 816   | 3.4  |    |                                    |                     |
| CSSBF-36-F | 36" x 15.5"<br>(914 x 394 mm)        | 1/4             | 120    | 804   | 6.7  | 60 | NEMA 5-15P                         | 143 lb.<br>(65 kg)  |
|            |                                      | 1/3             | 220    | 616   | 2.8  | 50 | CEE 7-7 Schuko,<br>BS-1363, AS3112 |                     |
|            |                                      |                 | 230    | 667   | 2.9  |    |                                    |                     |
|            |                                      |                 | 240    | 744   | 3.1  |    |                                    |                     |
|            |                                      |                 | 208    | 613   | 2.9  | 60 | BS-1363                            |                     |
|            |                                      |                 | 220    | 686   | 3.1  |    |                                    |                     |
|            |                                      |                 | 230    | 749   | 3.3  |    |                                    |                     |
|            |                                      |                 | 240    | 816   | 3.4  |    |                                    |                     |

\*Models with simulated stone are Swanstone®  
 \*All voltages non-CE

(continued on next page)

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com



# Cold Simulated Stone\* Shelves Built-In

Models: CSSB-2418, -3018, -3618, -4818

CSSBF-24-F, -24-I, -24-S, -36-F, -36-I, -36-S, -48-F, -48-I, -48-S

## SPECIFICATIONS

Cold Simulated Stone\* Built-In Shelf - Flush Top (continued from previous page)

The shaded areas contain electrical information for international models


| Model      | Dimensions (W x D of cooled surface) | Comp. Size (HP) | Volts* | Watts | Amps | Hz | Plug       | Approx. Ship Weight |
|------------|--------------------------------------|-----------------|--------|-------|------|----|------------|---------------------|
| CSSBF-36-I | 36" x 19.5"<br>(914 x 495 mm)        | 1/3             | 120    | 1044  | 8.7  | 60 | NEMA 5-15P | 155 lb.<br>(70 kg)  |
| CSSBF-36-S | 36" x 24"<br>(914 x 610 mm)          | 1/3             | 120    | 1044  | 8.7  |    |            | 167 lb.<br>(78 kg)  |
| CSSBF-48-F | 48" x 15.5"<br>(1219 x 394 mm)       | 1/3             | 120    | 1044  | 8.7  | 60 | NEMA 5-15P | 144 lb.<br>(65 kg)  |
| CSSBF-48-I | 48" x 19.5"<br>(1219 x 495 mm)       | 1/3             | 120    | 1044  | 8.7  |    |            | 173 lb.<br>(78 kg)  |
| CSSBF-48-S | 48" x 24"<br>(1219 x 610 mm)         | 1/2             | 120    | 1380  | 11.5 |    |            | 195 lb.<br>(89 kg)  |

## Cold Simulated Stone\* Shelf - Built-In - All Single Phase

| Model     | Dimensions (W x D of cooled surface) | Comp. Size (HP) | Volts* | Watts | Amps | Hz | Plug                                  | Approx. Ship Weight |
|-----------|--------------------------------------|-----------------|--------|-------|------|----|---------------------------------------|---------------------|
| CSSB-2418 | 24" x 18"<br>(610 x 457 mm)          | 1/4             | 120    | 804   | 6.7  | 60 | NEMA 5-15P                            | 120 lb.<br>(54 kg)  |
|           |                                      | 1/3             | 220    | 616   | 2.8  | 50 | CEE 7-7 Schuko,<br>BS-1363,<br>AS3112 |                     |
|           |                                      |                 | 230    | 667   | 2.9  |    |                                       |                     |
|           |                                      |                 | 240    | 744   | 3.1  |    |                                       |                     |
| CSSB-3018 | 30" x 18"<br>(762 x 457 mm)          | 1/4             | 120    | 804   | 6.7  | 60 | NEMA 5-15P                            | 132 lb.<br>(60 kg)  |
|           |                                      | 1/3             | 220    | 616   | 2.8  | 50 | CEE 7-7 Schuko,<br>BS-1363,<br>AS3112 |                     |
|           |                                      |                 | 230    | 667   | 2.9  |    |                                       |                     |
|           |                                      |                 | 240    | 744   | 3.1  |    |                                       |                     |
| CSSB-3618 | 36" x 18"<br>(914 x 457 mm)          | 1/4             | 120    | 804   | 6.7  | 60 | NEMA 5-15P                            | 149 lb.<br>(68 kg)  |
|           |                                      | 1/3             | 220    | 616   | 2.8  | 50 | CEE 7-7 Schuko,<br>BS-1363,<br>AS3112 |                     |
|           |                                      |                 | 230    | 667   | 2.9  |    |                                       |                     |
|           |                                      |                 | 240    | 744   | 3.1  |    |                                       |                     |
| CSSB-4818 | 48" x 18"<br>(1219 x 457 mm)         | 1/3             | 120    | 1044  | 8.7  | 60 | NEMA 5-15P                            | 145 lb.<br>(66 kg)  |

\*All voltages non-CE \*Models with simulated stone are Swanstone®

## PLUG CONFIGURATION

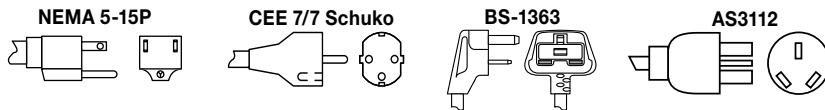

## COUNTERTOP CUTOUT DIMENSIONS

See Installation and Operating Manual for more information

| Model      | Width<br>with .375"<br>(10 mm) radii | Depth<br>with .375"<br>(10 mm) radii | Model      | Width<br>with .375"<br>(10 mm) radii | Depth<br>with .375"<br>(10 mm) radii | Model     | Width<br>with .375"<br>(10 mm) radii | Depth<br>with .375"<br>(10 mm) radii |
|------------|--------------------------------------|--------------------------------------|------------|--------------------------------------|--------------------------------------|-----------|--------------------------------------|--------------------------------------|
| CSSBF-24-F | 24.375"<br>(619 mm)                  | 15.875"<br>(403 mm)                  | CSSBF-48-F | 48.375"<br>(1229 mm)                 | 15.875"<br>(403 mm)                  | CSSB-2418 | 24.375"<br>(619 mm)                  | 18.375"<br>(467 mm)                  |
| CSSBF-24-I | 24.375"<br>(619 mm)                  | 19.875"<br>(505 mm)                  | CSSBF-48-I | 48.375"<br>(1229 mm)                 | 19.875"<br>(505 mm)                  | CSSB-3018 | 30.375"<br>(772 mm)                  | 18.375"<br>(467 mm)                  |
| CSSBF-24-S | 24.375"<br>(619 mm)                  | 24.375"<br>(619 mm)                  | CSSBF-48-S | 48.375"<br>(1229 mm)                 | 24.375"<br>(619 mm)                  | CSSB-3618 | 36.375"<br>(924 mm)                  | 18.375"<br>(467 mm)                  |
| CSSBF-36-F | 36.375"<br>(924 mm)                  | 15.875"<br>(403 mm)                  |            |                                      |                                      | CSSB-4818 | 48.375"<br>(1226 mm)                 | 18.375"<br>(467 mm)                  |
| CSSBF-36-I | 36.375"<br>(924 mm)                  | 19.875"<br>(505 mm)                  |            |                                      |                                      |           |                                      |                                      |
| CSSBF-36-S | 36.375"<br>(924 mm)                  | 24.375"<br>(619 mm)                  |            |                                      |                                      |           |                                      |                                      |

| Model       | Width<br>(should not exceed) | Height<br>(should not exceed) |
|-------------|------------------------------|-------------------------------|
| Control Box | 7.44"<br>(189 mm)            | 5.625" (143 mm)               |

## PRODUCT SPECS

### Cold Simulated Stone Built-In Shelves

The Cold Simulated Stone Built-In Shelf, patent pending, shall be model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Cold Simulated Stone Built-In Shelf shall be rated at ... watts, ... volts, and ... inches (millimeters) in overall width.

It shall consist of food-safe material, Condenser attached to Evaporator with 5 foot (1524 mm) flexible tubing, adjustable bracket with cord and plug attached.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.

(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | equipsales@hatcocorp.com | intl@hatcocorp.com