

Glo-Rite® Curved **Display Lights**Models: HL5-18, -24, -30, -36, -42, -48, -54, -60,

-66. -72

A stylish choice for illuminating your serving area. The HL5 LED Display Light offers the highest light output that is ideal for illuminating food products with either a warm white light (3050K) or a cool or neutral white light (4100K).

The sleek, curved design is patented and the LED lighting delivers significant savings with lower energy consumption and greater reliability.

Hatco provides you with a wide variety of colors and lengths for any serving area.

Standard features

- Features a patented curved housing design that has energy efficient dual LED lights across the display lamp that provide longer performance and energy savings (compared to standard incandescent bulbs)
- Lengths available from 18"-72" (457-1829 mm) in 6" (152 mm) increments
- Field replaceable dual LED lights
- Matches the Hatco line of Glo-Ray® Curved Infrared Strip Heaters for a fully integrated look
- Angle brackets and end panels match housing color or finish and 6" (152 mm) power leads are standard
- Optional non-adjustable tubular stands available

Project _	_
Item #	_
Quantity	



Options (available at time of purchase only)

LED Light			
☐ Warm White (305	60K) ⊔Cool	or Neutral White (4)	100K)
Housing Color or Finish and mounting bracke			lard) - End panels
Designer Color [†] □Warm Red □B □Navy Blue □H Gloss Finish [†]		□Gray Granite □Antique Copper	□White Granite
□ Radiant Red □ G □ Brilliant Blue	ilossy Gray [□ Bold Black	☐ Gleaming Gold
Non-Adjustalble Tubular	Stands (Clear	Anodized Aluminum	is standard and
require Conduit or Wi ☐ 10" (254 mm) ☐ 12		□14" (356 mm)	□ 16" (406 mm)
	□ Black □ Hunter Greei	□Gray Granite n □Antique Copper	□ White Granite
	□ Glossy Gray	☐ Bold Black	☐ Gleaming Go
Power Lead Length (6" ((152 mm) Lead	Length is standard)	—
□5' (1524 mm) – incl □6' (1829 mm) – incl □7' (2134 mm) – incl	udes a 3' (914	mm) conduit	

[†]Non-standard colors are non-returnable


□8' (2438 mm) – includes a 3' (914 mm) conduit □9' (2743 mm) – includes a 3' (914 mm) conduit □ 10' (3048 mm) – includes a 3' (914 mm) conduit ☐ 6' (1829 mm) Cord with Plug (NEMA 5-15)





Glo-Rite® Curved Display Lights Models: HL5-18, -24, -30, -36, -42, -48, -54, -60, -66, -72

HL5 Series

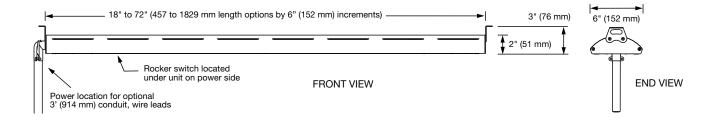

SPECIFICATIONS

Glo-Rite® Curved Display Lights

Model	Dimensions (Including Additional Height of Standard Angle Brackets) (W x D x H)	Height without Angle Brackets	Voltage	Watts	Shipping Weight*
HL5-18	18" x 6" x 3" (457 x 152 x 76 mm)			4.3	9 lbs. (4 kg)
HL5-24	24" x 6" x 3" (610 x 152 x 76 mm)			5.9	10 lbs. (5 kg)
HL5-30	30" x 6" x 3" (762 x 152 x 76 mm)			7.6	11 lbs. (5 kg)
HL5-36	36" x 6" x 3" (914 x 152 x 76 mm)	2" (51 mm)	120 (Single Phase)	9.2	12 lbs. (6 kg)
HL5-42	42" x 6" x 3" (1067 x 152 x 76 mm)			10.8	13 lbs. (6 kg)
HL5-48	48" x 6" x 3" (1219 x 152 x 76 mm)			12.4	14 lbs. (6 kg)
HL5-54	54" x 6" x 3" (1372 x 152 x 76 mm)			14	15 lbs. (7 kg)
HL5-60	60" x 6" x 3" (1524 x 152 x 76 mm)			15.7	16 lbs. (7 kg)
HL5-66	66" x 6" x 3" (1676 x 152 x 76 mm)			17.3	17 lbs. (8 kg)
HL5-72	72" x 6" x 3" (1829 x 152 x 76 mm)			18.9	18 lbs. (8 kg)

^{*} Shipping weight includes packaging.

ROCKER SWITCH

Location: Under unit on power side.

LEADS

6" (152 mm) leads on power side.

PRODUCT SPECS

Glo-Rite® Curved Display Lights

The Curved Display Lights shall be a Glo-Rite® Model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The HL5 Display Light shall be rated at ... watts, ... volts and be ... inches (millimeters) in overall width. It shall consist of an extruded aluminum housing with color or finish

matching brackets, end panels, and LED display lights. Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION

(800) 558-0607 (414) 671-6350 www.hatcocorp.com | support@hatcocorp.com

P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.