Decorative Lamps & Display Lights

Cafeterias • Convenience Stores
Supermarkets & Delis • Restaurants & Cafés
Clubs & Bars • Concessions

DL-1100-SR in Clear Brushed Metal
Gloss finish   *pg. 63-66*

DL-400-SN in Glossy Gray
Gloss finish   *pg. 63-66*

DL-400-STR in Glossy Gray
Gloss finish   *pg. 63-66*

DL-500-SR in Bright Brass
Plated finish   *pg. 63-66*

DL-700-RL in Glossy Gray Gloss finish
(sneeze guards not available)   *pg. 63-66*

DL-725-STR in Bright Nickel
Plated finish   *pg. 63-66*

DL-750-STR in Bright Nickel
Plated finish   *pg. 63-66*

HL5-60 in Standard Clear Anodized finish
(sneeze guards not available)   *pg. 68*

Decorative Lamps & Display Lights

DL-800-CTR
in Gloss finish

DL-400-ASU
in *Designer* color

DL-600-SL
in Gloss finish

DL-700-SU
in Plated finish

DL-1100-CR
in Gloss finish

DL-1400-CU
in *Designer* color

DL-750-CL
in Gloss finish

DL-725-SU
in Plated finish

DL-500-SU
in *Designer* color

DL-760-ASL
in *Designer* color

DL-1500-CTR
in Gloss and
Plated finishes

DL-775-RL
in Plated finish

ORDERING INSTRUCTIONS

Luminaire lamps are for lighting only. LUMINAIRE option must be specified when lamps are utilized for decorative purposes only (no heating). This option is not field convertible. Maximum 100 watts.

CLEARANCE REQUIREMENTS

NOTE: Install Standard Watt (120V bulb, 250W) no closer than 3" from a sidewall and no closer than 16" above a combustible surface, or no closer than 5" to a non-combustible surface.

NOTE: Install HIGH WATT (120V, 375W bulb) no closer than 3" from a sidewall and no closer than 27" above a combustible surface, or no closer than 17" to a non-combustible surface.

NOTE: Multiple installation of Decorative Lamps must have a minimum clearance of 12" on center of shade between each unit.

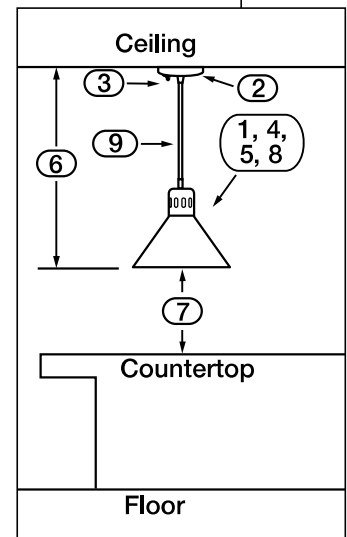(From left to right) **DL-2300-ASN, -2200-SU, -2100-SR, -1800-RL, -2400-SU, -1600-RCL and -1700-ASU**

Specify the following information with your order:

1. **Electrical:** Voltage 120V and Wattage 100 (Luminaire), 250 (Standard) or 375 (High)
2. **Mounting Style Code:** AS, AST, RC, RCT, R, RT, S, ST◘
3. **Switch Location Code:** Lower (L), None (N), Remote (R) or Upper (U). DLH models must have remote switch or none
4. **Shade Style Code:** -400, -500, -600, -700, -725, -750, -760, -775, -800, -1100, -1400, -1500, -1600, -1700, -1800, -2100, -2200, -2300, -2400
5. **Shade and Canopy Colors:**
   Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper, Smooth White, Gleaming Gold, Glossy Gray, Bold Black, Radiant Red⥤ **(lampshade only)**, Brilliant Blue* **(lampshade only)**, Clear Coat Brushed Metal⥤ **(lampshade only)**, Bright Brass⥤, Bright Nickel⥤, Bright Copper⥤, Antique Nickel⥤, Antique Brass⥤, Antique Bronze⥤
6. **Overall Unit Length:** For C, CT, S, ST or AS, AST Mounts, from ceiling to bottom of warmer lamp shade
7. **Clearance:** From bulb to surface (see **NOTE** Clearance Requirements above)
8. **Accessory Bulb Color/Coating:**
   40W Clear Coated (Luminaire only)
   250W Clear Uncoated, Clear Coated, Red Uncoated or Red Coated
   375W Clear Uncoated, Clear Coated
9. **Optional Cord/Track Color:** Black (standard), White (optional)

⥤ *Special process required and extended lead times, see page 65 for additional charge.*
   Specify your appropriate accessories with your order.
◘ *Mounting Style availability dependent on Shade Style type. See pages 63 & 64 for details.*

Ceiling
③ ②
⑥ ⑨ **1, 4, 5, 8**
⑦
Countertop
Floor

D L x - x x x x - x x x
Decorative Lamp
No Character = Standard Watt
L = Luminaire Low Watt
H = High Wattage
Switch Location
Mounting Style
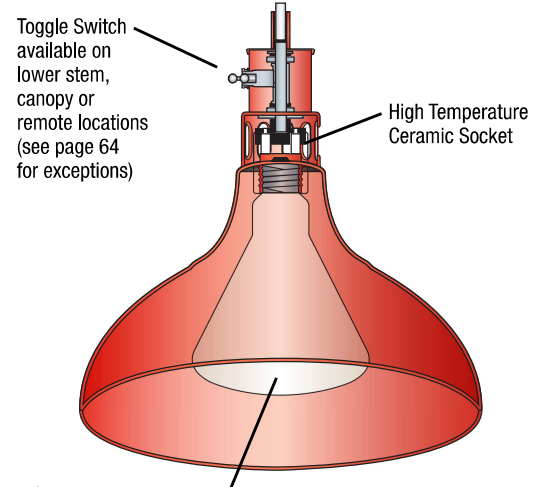Shade Style

Decorative Lamps/ Luminaires

Hatco Decorative Lamps provide radiant heat to briefly hold food warm at kitchen work areas, wait staff pickup stations or customer serving points, while enhancing your décor. Versatile enough for any location, the range of lights are available with a selection of personalized choices: shade styles, colors, switch locations and mounting arrangements. Configurations for lighting (Luminaire), as well as foodwarming, are available.

NOTE: Decorative Lamps and Luminaires are non-returnable.

- Decorative Lamps and Luminaires available in nineteen shade styles
- Ten different mounting arrangements to choose from
- Seven *Designer* colors, seven Gloss finishes and six Plated finishes available
- Four power switch options:
  Upper (on canopy)
  Lower (at stem)
  Remote
  None
- Low, standard and high watt bulbs available
- Available for food holding and display or lighting only applications

Rigid and Adjustable Stem Mounts in unit color (except for Gloss finishes Radiant Red, Brilliant Blue and Clear Brushed Metal)

Black or white cord options available. Various cord lengths available, starting at 17", while retractable can vary

Toggle Switch available on lower stem, canopy or remote locations (see page 64 for exceptions)

High Temperature Ceramic Socket

Bulbs for:
40W clear, coated (Luminaire only or DLL models)
250W (DL models) or 375W (DLH models) in clear, coated or uncoated
250W (DL models) red, uncoated or coated

Build A Decorative Lamp

Hatco has given you a variety of simple and easy ways to "Build Your Decorative Lamp." You can go online or quickly do the work tables of "How to Build Your Lamp" on pages 63 through 66.

- GO online at:
www.hatcocorp.com and click on "Product Configurators" than "Build a Lamp" in the header. *(Download a PDF of your lamp configuration in color and a Hatco List Price Quote)*
- OR follow the six steps in the Hatco Price List (next four pages) to build your Hatco model code. Then look at the following page for the accessories, like a bulb or track, to easily complete your total order.

Hatco Website shown, click on "Product Configurators" then "Build A Lamp" in the header to configure your choices

Now you can develop your own Hatco Decorative Lamp solutions with our online lamp configurator.

Visit www.hatcocorp.com Click on "Build a Lamp"

HOW TO BUILD A LAMP

DLH-775-CR

Decorative Lamp
High Wattage
Shade Style
Switch Type/Location
Mounting Style

Specify the following options when ordering:

1 Electrical	**DLH**	(High Watt - 375 watt max)
2 Mounting Style	**C**	(Cord Mount)
3 Switch Location	**R**	(Remote Switch Location)
4 Shade Style	**-775**	(See Shade Style on page 65)
Shade Color	**BBRASS**	(Bright Brass Plated Finish)
6 Overall Length	**80"**	(Overall Length) - *Only C mounts & over 72"*

(Specify to the nearest inch — CL, CU, CT, ASL, ASU, SL, SU, ST mounts only). Information indicated in red are items that the customer must enter. *Bulbs are not included.*

Build A Decorative Lamp Configurator Worksheet

Complete the six steps on this worksheet to configure your Hatco model code.
In order to get exactly what you need in the least amount of time, have this handy
when ordering your Hatco Decorative Lamp.

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEPS 1 AND 2
(To determine your model code, pick all your options - bulb not included)

STEP 1: ELECTRICAL

Voltage   120

Wattage –
DLL- Luminaire   100 watt max
DL-   Standard   250 watt max
DLH- High Watt   375 watt max

STEP 2: MOUNTING STYLE

Mounting Style –
C⊗   Cord (specify Cord Color)
CT✱⊗   Cord Mount to Track Adapter (specify Cord and Track Color)
R⊗   Coiled Retractable Mount (specify Cord Color)
NEW **RC**⊗   Retractable Cord (specify Cord Color)
RT✱⊗   Coiled Retractable Mount to Track Adapter (specify Cord and Track Color)
NEW **RCT**✱⊗   Retractable Cord Mount to Track Adapter (specify Cord and Track Color)
S⊘   Stem

⊘ Not available with a lower switch for DL-2100, -2200, -2300 or -2400
⊗ Not available for DL-2100, -2200, -2300 or -2400

✱ **NOTE:** *Lamp shade diameter and wattage may limit number of lamps per track. To ensure warranty coverage, do not install track systems in damp or wet locations (including above steam tables).*

NEW

DL-1600-RCL shown with
Retractable Cord Mount

DL-1800-RL shown with
Coiled Retractable Cord Mount

MOUNTING STYLES		SPECIFY:	Shade Height	
			8½" H	10½" H
CORD	**C Mount**⊗ Cord Mount to canopy. ⊢4⅞"⊣ CU SWITCH / CL SWITCH	Overall Length	17" to any length	19" to any length
	CT Mount✱⊗ Cord Mount to track adapter. CTL SWITCH			
RETRACTABLE CORD	**R Mount**⊗ Coiled Retractable Cord Mount. ⊢6"⊣ RL SWITCH	Overall Length Adjusts to a maximum and minimum according to shade height	31" to 69½"	33" to 71½"
	RC Mount⊗ *NEW* Retractable Cord Mount. ⊢6"⊣ RCL SWITCH		24" to 72"	27" to 75"
	RT Mount✱⊗ Coiled Retractable Cord Mount to track adapter. RTL SWITCH		33⅜" to 71⅞"	35⅜" to 73⅞"
	RCT Mount✱⊗ *NEW* Retractable Cord Mount to track adapter. RCTL SWITCH		27" to 75"	29" to 77"
STEM	**S Mount**⊘ Rigid Stem Mount to canopy. ⊢4⅞"⊣ SU SWITCH / SL SWITCH	Overall Length	14" to 71"	16" to 73"

D L x - x x x x - x x x

Decorative Lamp
No Character = Standard Watt
L = Luminaire Low Watt
H = High Wattage
Switch Location
Mounting Style
Shade Style

NOTE: Decorative Lamps and Luminaires are non-returnable.

*Go to next page to Continue Step 2
(Stem and Adjustable Stem Mounts) and for Step 3.*

Decorative Lamps & Display Lights

Build A Decorative Lamp Configurator Worksheet

Continued from page 63

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEPS 2 AND 3
(To determine your model code, pick all your options - bulb not included)

Visit www.hatcocorp.com
Click on "Build a Lamp"

Decorative Lamps & Display Lights

MOUNTING STYLES

Review Switch Locations below in Step 3 to determine your appropriate model code.	SPECIFY:	Shade Height	
		8½" H	10½" H
STEM ST Mount✱⊘ Rigid Stem Mount to track adapter. *STL SWITCH*	Overall Length	17" to 71"	19" to 73"

|			
ADJUSTABLE **AS Mount**⊘ At install only, limited height adjustments with Rigid Stem Mount to canopy. ◄—4⅞"—► *ASU SWITCH* *ASL SWITCH*	Adjustable Overall Length (at install only)	**ASU, ASR, ASN**	
		14" to 16" 16" to 19½" 20" to 27" 27" to 42" 42" to 72"	16" to 18" 18" to 21½" 22" to 29" 29" to 44" 44" to 74"
		ASL	
		16" to 17" 18" to 22" 22" to 28" 29" to 43" 44" to 73"	18" to 19" 20" to 24" 24" to 30" 31" to 45" 46" to 75"
AST Mount✱⊘ At install only, limited height adjustments with Rigid Stem Mount to track adapter. *ASTL SWITCH*		**ASTR, ASTN**	
		16" to 18" 18" to 21" 22" to 29" 30" to 44" 45" to 74"	18" to 20" 20" to 23" 24" to 31" 32" to 46" 47" to 76"
		ASTL	
		18" to 19" 20" to 23" 24" to 31" 31" to 45" 46" to 75"	20" to 21" 22" to 25" 26" to 33" 33" to 47" 48" to 77"

SWITCH LOCATIONS

L - Lower Switch
Not available on:
• **DLH** (high watt models)
• Not available for DL-2100, -2200, -2300 or -2400.

R - Remote Switch
• Accommodates 16 amps
• Up to seven 250W lamps, or five 375W lamps maximum per remote switch

◄—4⅞"—►

U - Upper Switch
Not available on:
• **DLH** (high watt models)
• R, RC Mounts
• Track mounts (CT, RT, RCT, ST, AST)

STEP 2: MOUNTING STYLE – continued

Mounting Style –

|	
ST✱⊘	Stem to Track Adapter
AS⊘	Adjustable Stem Mount (Limited height adjustment at install only, mount with rigid stem mount to canopy)
AST✱⊘	Adjustable Stem Track Mount (Limited height adjustment at install only, mount with rigid stem mount to track adapter)

⊘ Not available with a lower switch for DL-2100, -2200, -2300 or -2400

✱ **NOTE:** *Lamp shade diameter and wattage may limit number of lamps per track. To ensure warranty coverage, do not install track systems in damp or wet locations (including above steam tables).*

Aluminum Plated Coupler provides a high strength hold for the Adjustable Stem Mount

STEP 3: SWITCH LOCATION

Switch Location –

L	**Lower** (not available on high watt models)
N	**None**
R	**Remote**
U	**Upper** (not available on high watt models)

Go to next page for Steps 4 and Steps 5.

D L x - x x x x - x x x

Decorative Lamp
No Character = Standard Watt
L = Luminaire Low Watt
H = High Wattage
Switch Location
Mounting Style
Shade Style

NOTE: Decorative Lamps and Luminaires are non-returnable.
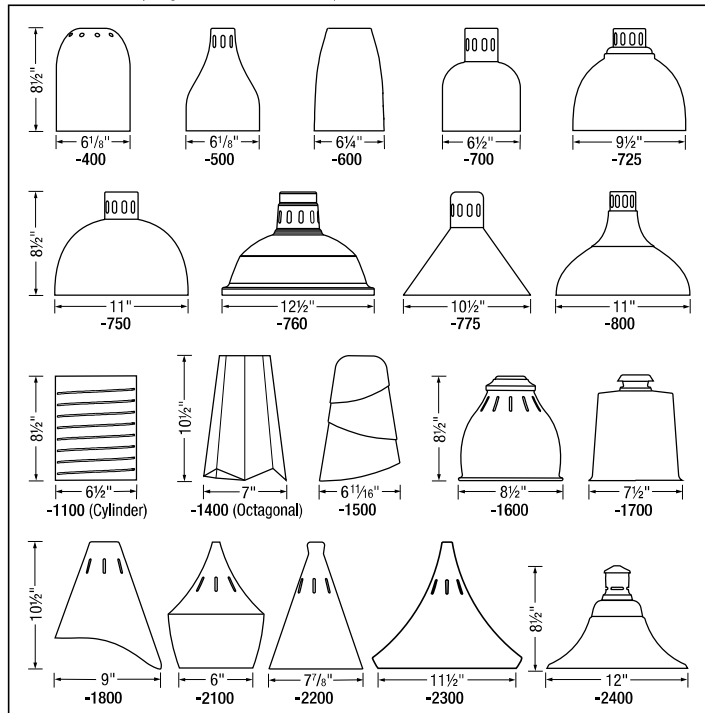
Build A Decorative Lamp Configurator Worksheet

Continued from page 64

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEPS 3 AND 4
(To determine your model code, pick all your options - bulb not included)

SHADE STYLES (height and width shown)

8½" 6⅛" -400
8½" 6⅛" -500
6¼" -600
6½" -700
9½" -725

8½" 11" -750
12½" -760
10½" -775
11" -800

8½" 6½" -1100 (Cylinder)
10½" 7" -1400 (Octagonal)
6¹¹⁄₁₆" -1500
8½" 8½" -1600
7½" -1700

10½" 9" -1800
6" -2100
7⅞" -2200
11½" -2300
8½" 12" -2400

STEP 4: SHADE STYLE

Shade Code	Approx. Ship Weight (depending on components)
-400	6-10 lbs.
-500	6-10 lbs.
-600	6-10 lbs.
-700	6-10 lbs.
-725	6-10 lbs.
-750	6-10 lbs.
-760	6-10 lbs.
-775	6-10 lbs.
-800	6-10 lbs.
-1100	6-10 lbs.
-1400	6-10 lbs.
-1500	6-10 lbs.
-1600	6-10 lbs.
-1700	6-10 lbs.
-1800	6-10 lbs.
-2100	6-10 lbs.
-2200	6-10 lbs.
-2300	6-10 lbs.
-2400	6-10 lbs.

SHADE AND CANOPY COLORS

Designer Colors

Warm Red   Black   Gray Granite   White Granite   Navy Blue   Hunter Green   Antique Copper

Gloss Finishes

Smooth White   Gleaming Gold   Glossy Gray   Bold Black

❋ **Gloss Finishes for Shade Only –** *Special Process Required and Extended Lead Times*

Radiant Red   Brilliant Blue   Clear Brushed Metal

Printed colors are a representation and may not exactly match our Designer, Gloss and Plated Finishes.

STEP 5: SHADE AND CANOPY COLORS ❋

Designer Colors

|			
RED	Warm Red	**NAVY**	Navy Blue
BLACK	Black	**GREEN**	Hunter Green
GRAY	Gray Granite	**COPPER**	Antique Copper
WHITE	White Granite		

Gloss Finishes

SWHITE	Smooth White	**GGRAY**	Glossy Gray
GGOLD	Gleaming Gold	**BBLACK**	Bold Black

❋ *Gloss Finishes for Shade Only – (must choose other finish for remainder of unit) – Special Process Required and Extended Lead Times –*

RRED	Radiant Red
BBLUE	Brilliant Blue
CL-COAT	Clear Brushed Metal

***Go to next page to Continue Step 5
(Plated Finishes) and for Step 6.***

D L x - x x x x - x x x

Decorative Lamp
No Character = Standard Watt
L = Luminaire Low Watt
H = High Wattage
Switch Location
Mounting Style
Shade Style

NOTE: Decorative Lamps and Luminaires are non-returnable.

Build A Decorative Lamp Configurator Worksheet

Continued from page 65

BUILD YOUR DECORATIVE/LUMINAIRE LAMPS – STEPS 5 AND 6
(To determine your model code, pick all your options - bulb not included)

Visit www.hatcocorp.com
Click on "Build a Lamp"

STEP 5: SHADE AND CANOPY COLORS ✹

Plated Finishes –
Special Process Required and Extended Lead Times –

BBRASS	Bright Brass
BNICKEL	Bright Nickel
BCOPPER	Bright Copper
ANICKEL	Antique Nickel
ABRASS	Antique Brass
ABRONZE	Antique Bronze

Plated Finishes – *Special Process Required and Extended Lead Times*

Bright Brass	Bright Nickel	Bright Copper	Antique Nickel	Antique Brass	Antique Bronze

* Exception: DL-1500 for Shade Only –

Designer Black/
Antique Copper/
Black

Gloss Bold Black/
Plated Bright Nickel/
Gloss Bold Black✹

Gloss Bold Black/
Plated Bright Copper/
Gloss Bold Black✹

Gloss Bold Black/
Plated Antique Nickel/
Gloss Bold Black✹

Gloss Bold Black/
Radiant Red/
Bold Black✹

✹ **Gloss and Plated Finishes –** *Special Process Required and Extended Lead Times*

Printed colors are a representation and may not exactly match our Designer, Gloss and Plated Finishes.

STEP 6: OVERALL LENGTH

Overall Length – For C or CT Mounts from ceiling to bottom of lamp shade.

|	
Up to 72"	
Greater than 72" (C or CT Mount only)	

YOUR TOTAL LIST PRICE AND MODEL CODE

Add the total costs of options below (not for retrofit – bulb not included) **–**

|			
Step 1	Electrical	$	0.00
Step 2	Mounting Style		
Step 3	Switch Location		0.00
Step 4	Shade Style		
Step 5	Shade and Canopy Colors		
Step 6	Overall Length		
	Your Total Price	$	

D L ☐ **-** ☐☐☐ **-** ☐☐

Decorative Lamp
Wattage Code
Shade Style Code
Switch Location
Mounting Style

NOTE: Decorative Lamps and Luminaires are non-returnable.

BULBS AND ACCESSORIES – PAGE 67

D L x **- x x x x - x x x**

Decorative Lamp
No Character = Standard Watt
L=Luminaire Low Watt
H = High Wattage
Switch Location
Mounting Style
Shade Style

DL-750-STR in Bright Nickel finish
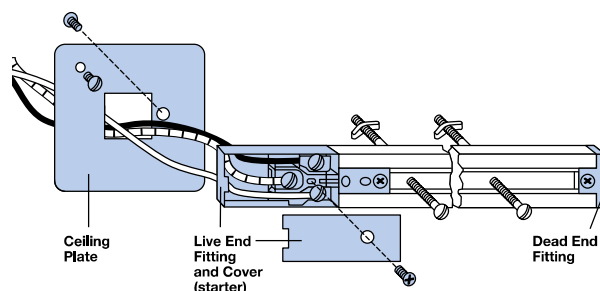
TRACK INSTALLATION AND MODIFICATION KIT –
Highlighted components (for cutting Track Length into multiple sections)

Ceiling Plate

Live End Fitting and Cover (starter)

Dead End Fitting

CROSS SECTION OF TRACK
1 3/8"
3/4"

DL-TRACK-4B

DL-TRACK-4W

Decorative Lamps & Display Lights

NOTE: Decorative Lamps and Luminaires are non-returnable.

coupler

DL-TRACK-12W
Closeup of channel side

4' track
4' track
4' track

OPTIONS (available at time of purchase only)

DL-CORD-BK	Black Cord – Standard (C=Cord, R=Retractable Mounts Only)
DL-CORD-WHITE	White Cord (C=Cord, R=Retractable Mounts Only)

Leads – For any Stem Mount or Adjustable Stem Mount unit, must specify Lead Length –

LEADS5	1'-5'	Extended Electrical Leads
LEADS10	6'-10'	Extended Electrical Leads
LEADS15	11'-15'	Extended Electrical Leads
LEADS20	16'-20'	Extended Electrical Leads

ACCESSORIES (available for purchase at any time)

DL-TRACK-4B	4' Track Mount Bar, Black△=
DL-TRACK-4W	4' Track Mount Bar, White△=
DL-TRACK-8B	Two 4' Track Mount Bars with Couplers, Black△=⊘
DL-TRACK-8W	Two 4' Track Mount Bars with Couplers, White△=⊘
DL-TRACK-12B	Three 4' Track Mount Bars with Couplers, Black△=⊘
DL-TRACK-12W	Three 4' Track Mount Bars with Couplers, White△=⊘
DL-TRACK-16B	Four 4' Track Mount Bars with Couplers, Black△=⊘
DL-TRACK-16W	Four 4' Track Mount Bars with Couplers, White△=⊘
DL-TRACKBLK	Additional Track Installation and Modification Kit (includes Ceiling Plate, Live End Fitting and Cover (Starter) and Dead End Fitting) – Black (For cutting Track Length into multiple sections, see above)
DL-TRACKWHT	Additional Track Installation and Modification Kit (includes Ceiling Plate, Live End Fitting and Cover (Starter) and Dead End Fitting) – White (For cutting Track Length into multiple sections, see above)
DL-SWITCH-16AMP	16 Amp Lamp Toggle Switch
WHITE-CTD-120L	120 Volt, 40 Watt Clear Bulb, Coated (Luminaire models only)
WHITE-UCTD-120	120 Volt, 250 Watt Clear Bulb, Uncoated
WHITE-UCTD-120H	120 Volt, 375 Watt Clear Bulb, Uncoated (high watt models only)
WHITE-CTD-120	120 Volt, 250 Watt Clear Bulb, Coated
WHITE-CTD-120H	120 Volt, 375 Watt Clear Bulb, Coated (high watt models only)
RED-UCTD-120	120 Volt, 250 Watt Red Bulb, Uncoated
RED-CTD-120	120 Volt, 250 Watt Red Bulb, Coated

= Tracks may be cut to fit any length by installer. Modification kits available.

△ Maximum seven (7) 250 watt lamps or five (5) 375 watt lamps per 20 amp Track Bar Circuit. Maximum 1920 watts or 16 amps per any length track. Installer is responsible for properly sizing the supply circuit and the lamp load. Lamp shade diameter and wattage may limit number of lamps per track.

⊘ Overall length may not add up to the exact desired size for 8', 12' or 16' due to cumulative deductions for each 4' section used.

DL-TRACKBLK

DL-TRACKWHT

WHITE-CTD-120L
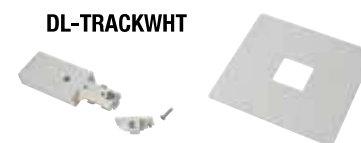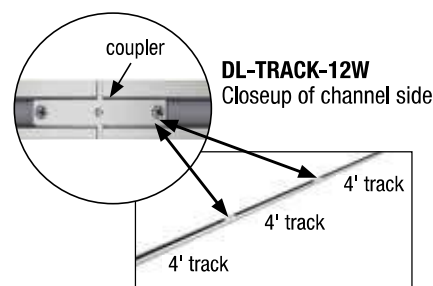
RED uncoated, **WHITE** uncoated, **RED** coated, **WHITE** coated

Decorative Lamps & Display Lights

Glo-Rite® Curved Display Lights

A stylish choice for illuminating your serving area. The Glo-Rite® Curved Display Light offers the highest light output that is ideal for illuminating food products with either a warm white light (3050K) or a cool or neutral white light (4100K).

Hatco provides you with a wide variety of colors and lengths for any serving area.

- Features a patented curved housing design with energy efficient dual LED lights across the display lamp that provide longer performance and energy savings (compared to standard incandescent bulbs)

- Field replaceable dual LED lights
- Matches the Hatco line of Glo-Ray® Curved Infrared Strip Heaters for a fully integrated look
- Angle brackets and 6" LED leads are standard
- Optional non-adjustable tubular stands and top or bottom mounting stands available

HL5-36
Clear Anodized (standard) shown in top and underside views

GLO-RITE® CURVED DISPLAY LIGHTS

Model	Width	Voltage Single Phase	Watts	Approx. Ship Weight
HL5-18	18"	120	4.3	9 lbs.
HL5-24	24"	120	5.9	12 lbs.
HL5-30	30"	120	7.6	12 lbs.
HL5-36	36"	120	9.2	12 lbs.
HL5-42	42"	120	10.8	14 lbs.
HL5-48	48"	120	12.4	16 lbs.
HL5-54	54"	120	14.0	17 lbs.
HL5-60	60"	120	15.7	18 lbs.
HL5-66	66"	120	17.3	19 lbs.
HL5-72	72"	120	18.9	20 lbs.

All Curved Display Light Models Feature:
Voltage: 120, single phase.
Models Shipped with: End panels, angle brackets with rocker switch underunit on power side.
Leads: 6" leads - on power side.
Dimensions: 18"-72"W x 6"D x 3"H (height includes standard angle bracket).

OPTIONS (available at time of purchase only)

Non-Adjustable Anodized Stands – Clear Anodized Standard

Side Mount Leg –

SNTL5-10T,-12T	Top mounting stand (specify 10" or 12" clearance)
SNTL5-14T,-16T	Top mounting stand (specify 14" or 16" clearance)
SNTL5-10B,-12B	Bottom mounting stand (specify 10" or 12" clearance)
SNTL5-14B,-16B	Bottom mounting stand (specify 14" or 16" clearance)

Bottom Mount Leg –

NTL5-10, -12	Tubular stands (specify 10" or 12" clearance)	1 pair
NTL5-14, -16	Tubular stands (specify 14" or 16" clearance)	1 pair
NTL5-PAINT	*Designer* color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –	1 pair

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Standard –

RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper	**per foot**
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green			

Gloss Finishes – Non-standard colors are non-returnable

GGOLD	Gleaming Gold	BBLACK	Bold Black	BBLUE	Brilliant Blue	GGRAY	Glossy Gray	**per foot**
RRED	Radiant Red							

LED Leads (must specify LED Lead Length) –

HL5-LEAD5	5' total LED Lead Length (includes a 3' conduit)
HL5-LEAD6	6' total LED Lead Length (includes a 3' conduit)
HL5-LEAD7	7' total LED Lead Length (includes a 3' conduit)
HL5-LEAD8	8' total LED Lead Length (includes a 3' conduit)

HL5-LEAD9	9' total LED Lead Length (includes a 3' conduit)
HL5-LEAD10	10' total LED Lead Length (includes a 3' conduit)
HL5-CORD	6' Cord with Plug (NEMA 5-15P)

LED Light –

HL5-3050	Warm White (3050K)
HL5-4100	Cool or Neutral White (4100K)

HL5-36 with SG5-36-CA
Sneeze Guard Accessory

ACCESSORIES (available for purchase at any time)

Curved tempered glass Sneeze Guard with penciled and polished edges for HL5 models – 24" D x 4 1/8" H

With Black Anodized Hardware –

SG5-18-BA	Sneeze Guard fits 18" HL5-18 model
SG5-24-BA	Sneeze Guard fits 24" HL5-24 model
SG5-30-BA	Sneeze Guard fits 30" HL5-30 model
SG5-36-BA	Sneeze Guard fits 36" HL5-36 model
SG5-42-BA	Sneeze Guard fits 42" HL5-42 model
SG5-48-BA	Sneeze Guard fits 48" HL5-48 model
SG5-54-BA	Sneeze Guard fits 54" HL5-54 model
SG5-60-BA	Sneeze Guard fits 60" HL5-60 model
SG5-66-BA	Sneeze Guard fits 66" HL5-66 model
SG5-72-BA	Sneeze Guard fits 72" HL5-72 model

With Clear Anodized Hardware –

SG5-18-CA	Sneeze Guard fits 18" HL5-18 model
SG5-24-CA	Sneeze Guard fits 24" HL5-24 model
SG5-30-CA	Sneeze Guard fits 30" HL5-30 model
SG5-36-CA	Sneeze Guard fits 36" HL5-36 model
SG5-42-CA	Sneeze Guard fits 42" HL5-42 model
SG5-48-CA	Sneeze Guard fits 48" HL5-48 model
SG5-54-CA	Sneeze Guard fits 54" HL5-54 model
SG5-60-CA	Sneeze Guard fits 60" HL5-60 model
SG5-66-CA	Sneeze Guard fits 66" HL5-66 model
SG5-72-CA	Sneeze Guard fits 72" HL5-72 model

H L 5 - x x
Glo-Rite Curved Display Light Aluminum Housing — Width (Inches)

COLORS AND FINISHES – INSIDE BACK COVER

Glo-Rite®
Display Lights

Let the light shine on your work surface or display areas with the Glo-Rite® Display Lights. Durable and effective, Hatco light strips are made of extruded aluminum housings with bright-annealed reflectors for maximum brightness.

- Incandescent bulbs with special protective coating to guard against food contamination
- Extra lamps available on models from 24" to 72"
- Optional *Designer* colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper

HL-24-2 including extra lamp assembly with lamps on 12" centers standard

GLO-RITE DISPLAY LIGHTS

Model	Voltage Single Phase	No. of Bulbs	Width	Watts△	Approx. Ship Weight
HL-18	120	2	18"	120	6 lbs.
HL-24	120	2	24"	120	7 lbs.
HL-24-2	120	3	24"	180	6 lbs.
HL-30	120	2	30"	120	7 lbs.
HL-30-2	120	4	30"	240	8 lbs.
HL-36	120	3	36"	180	8 lbs.
HL-36-2	120	5	36"	300	9 lbs.
HL-42	120	3	42"	180	10 lbs.
HL-42-2	120	6	42"	360	10 lbs.
HL-48	120	4	48"	240	11 lbs.
HL-48-2	120	7	48"	420	12 lbs.
HL-54	120	4	54"	240	12 lbs.
HL-54-2	120	8	54"	480	13 lbs.
HL-60	120	5	60"	300	13 lbs.
HL-60-2	120	9	60"	540	13 lbs.
HL-66	120	5	66"	300	14 lbs.
HL-66-2	120	10	66"	600	15 lbs.
HL-72	120	6	72"	360	18 lbs.
HL-72-2	120	10	72"	600	22 lbs.

△ Rated at 60 watt but comes with 40 watt incandescent bulb.

All Display Light Models Feature:
Toggle Switch (max. 15 amps) Location: Chef's left side (unless otherwise specified).
Leads: 6" leads – server's right.
Dimensions: 3"D x 2½"H.

OPTIONS (available at time of purchase only)

HAL	60 watt Halogen Bulb in lieu of standard Display Light
NO BULB	No Bulb
REM TOG	Remote Toggle Switch (max. 15 amps)

Leads (must specify Lead Length) –

LEADS5	1'-5' Extended Electrical Leads
LEADS10	6'-10' Extended Electrical Leads
LEADS15	11'-15' Extended Electrical Leads
LEADS20	16'-20' Extended Electrical Leads

ACCESSORIES (available for purchase at any time)

HL-BRKT	Adjustable Angle Bracket

Chef Bulbs (120V) adjustable bulb – Bulbs must be rotated down –

CLED-3000-120	Chef LED Bulb (similar to warm Halogen light)
CLED-4000-120	Chef LED Bulb (similar to cool Fluorescent light)

COLORS AND FINISHES – INSIDE BACK COVER

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –

RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper

HL-BRKT Accessory

-3000 or -4000 Accessory

H L - x x - 2

Display Light ———
Extra Lamp Models
Width (Inches)