

Toasters

*Cafeterias • Buffets • Supermarkets & Delis
Restaurants & Cafés • Clubs & Bars • Catering*



ITQ-1750-2C pg. 203



TPT-120 pg. 204



TQ3-20H in standard *Designer Black* pg. 205



TQ3-400 in standard *Designer Black* pg. 205



TQ-400 pg. 206



TQ-1800 pg. 206



TK-100 pg. 208

Intelligent Toast-Qwik®

Hatco's Intelligent Toast-Qwik® allows the operator to toast multiple products at the touch of the button, changing easily from bagels to croissants to Texas toast to hash browns, as well as melting cheese and finishing smaller food products. The unit can easily take the place of the current toasting platform and add versatility and future menu expansion, along with energy efficiency and cost savings.

- The conveyor toaster can operate in three different modes:
 - ~ Continuous Through Put
 - ~ In and Reverses Out Mode
 - ~ In, Pause, then Continues Through
- USB port located on the front allows for easy transfer of information, such as program changes and product usage information
- The ability to program up to twenty product settings
- Hatco's patented ColorGuard Sensing System monitors and adjusts conveyor

speed and temperature during high usage periods to ensure toast color uniformity

- Using Hatco's Spot-On® Technology, the toaster senses when product is placed on the conveyor and activates the unit

Spot-ON®
Technology

- Easy to clean, with removable crumb tray and collector ramp. There is minimal operator maintenance required, with self-cleaning elements and no maintenance motor and conveyor drives



ITQ-875-1C



ITQ-1000-1C



ITQ-1750-2C

HORIZONTAL CONVEYOR TOASTERS

Model	Voltage	Dimensions W x D x H	Watts	Amps	Capacity/ Minute ¹	Plug	Approx. Ship Weight
ITQ-875-1C	208	14 ⁵ / ₈ " x 28 ³ / ₄ " x 16 ⁵ / ₈ "	2700	13.0	15	NEMA 6-20P	86 lbs.
ITQ-875-1C	240	14 ⁵ / ₈ " x 28 ³ / ₄ " x 16 ⁵ / ₈ "	2700	11.3	15	NEMA 6-20P	86 lbs.
ITQ-1000-1C ²	208-240	17 ⁷ / ₈ " x 28 ⁵ / ₈ " x 18"	3230-4300	15.5-17.9	17	NEMA 6-30P	89 lbs.
ITQ-1750-2C	208	20 ¹ / ₄ " x 28 ³ / ₄ " x 18 ¹ / ₂ "	4960	23.8	30	NEMA 6-30P	106 lbs.
ITQ-1750-2C	240	20 ¹ / ₄ " x 28 ³ / ₄ " x 18 ¹ / ₂ "	4960	20.7	30	NEMA 6-30P	106 lbs.

¹ Toasting capacity may vary by product. Toasting of coated products not recommended.

² Unit is designed to operate on supply voltages between 208V and 240V.

All Horizontal Conveyor Toaster Models Feature:

Opening Dimensions: ITQ-875-1C: 5⁵/₈"W x 2¹/₄"H.

ITQ-1000-1C: 9⁵/₈"W x 2"H.

ITQ-1750-2C: Two openings at 5⁵/₈"W x 2¹/₄"H.

Cord Location: 6' cord — left center on back of unit.


OPTIONS (available at time of purchase only)

ITQ-L6-20	NEMA L6-20P Locking Cap in lieu of NEMA 6-20P
ITQ-L6-30	NEMA L6-30P Locking Cap in lieu of NEMA 6-30P

ACCESSORIES (available for purchase at any time)

Paddle, with high temp, non-stick coating —

ITQ1C-PAD	9" wide Food Paddle for ITQ-1000-1C model only
ITQ2C-PAD	5.7" wide Food Paddle for ITQ-875-1C and ITQ-1750-2C models only
ITQ2CFEED175	Feed Ramp for ITQ-1750-2C only (sold as single ramp only)

ITQ2C-PAD
Accessory

Pop-Up Toasters

Perfect for self-serve areas and light volume applications, the Hatco Pop-Up Toasters provide even golden toasting of a variety of bread products. The durable stainless steel housing contains four extra wide self-centering slots with individual toasting controls and removable crumb tray.

- Evenly toasts a variety of bread products including bagels, Texas toast, waffles and English muffins
- All models have four self-centering 1¼" wide slots
- A selector switch for single- or double-sided toasting (excluding TPT-120)

- Durable stainless steel construction
- Individual toasting controls
- Removable crumb trays for easy cleaning
- 6' cord with plug



TPT-120



TPT-208 Selector switch for single- or double-sided toasting (excluding TPT-120)

POP-UP TOASTERS

Model	Dimensions W x D x H	Voltage	kW	Plug	Approx. Ship Weight
TPT-120*	13½" x 12¾" x 8½"	120	1.8	NEMA 5-15P	14 lbs.
TPT-208**	13¾" x 12¾" x 8½"	208	2.6	NEMA 6-15P	16 lbs.
TPT-240	13¾" x 12¾" x 8½"	240	2.6	NEMA 6-15P	16 lbs.

* Canadian model is 1.4 kW.

** Canadian model uses NEMA 6-20P.

All Pop-Up Toaster Models Feature:

Slot Opening: 1¼"W x 5½"D.

Cord Location: 6' cord – back of unit, lower center.

Pop-Up Toasters can be shipped Fed-Ex Ground or United Parcel Service.

TPT TOASTER AMP RATINGS

Model	120V/1 Ø Amps	208V/1 Ø Amps	240V/1 Ø Amps
TPT-120	15.0	–	–
TPT-120*	12.0	–	–
TPT-208	–	12.5	–
TPT-240	–	–	10.9

* Canada only

OPTIONS (available at time of purchase only)

Designer Color – Non-standard colors are non-returnable – Stainless Steel Standard –

BBLACK Bold Black (TPT-120 only)

RRED Radiant Red (TPT-120 only)

COLORS AND FINISHES – INSIDE BACK COVER



TPT - x x x

Toaster Pop-Up Type — Voltage

Toast-Qwik® Conveyor Toasters

Hatco's next generation of Toast-Qwik® Toasters have been designed to provide a great look, easy to use touchscreen controller (excluding TQ3-10, -20 and -20H) and increased production capabilities. They continue to provide the best reliability, flexibility and value of any conveyor toaster available!

- Patented ColorGuard Sensing System which continually monitors and adjusts the chamber to ensure consistent toast results - even in your busiest periods
- The TQ3-10 features an Air Intake Filter screen on the front of the unit, while the rest of the line feature a removeable bottom screen. Both versions are removable for easy cleaning
- Power Save mode activates manually by pressing the Power Save Button (green leaf symbol), which reduces power by 50%
- Crumb tray is removable for easy cleaning
- Up to 12 programmable settings for precise and instant product changes (excludes TQ3-10, -20 and -20H)
- USB port for software updates (excludes TQ3-10, -20 and -20H)
- 2" high opening standard - 3" high opening available on the TQ3-20H, -500H, -900H and -2000H models for thicker bread products



TQ3-2000
in optional
Stainless Steel



TQ3-500 in
optional *Designer*
Warm Red



TQ3-20H
in standard
Designer Black



TQ3-10
available in
Designer Black only

HORIZONTAL CONVEYOR TOASTERS

Model	Opening Dimensions (W x H)	Dimensions (W x D x H) Height includes legs	Voltage 50/60Hz	Watts	Amps	Plug	Approx. Ship Weight
TQ3-10*	10 ³ / ₈ " x 2"	14 ¹ / ₂ " x 21 ³ / ₁₆ " x 16 ³ / ₁₆ "	120	1780	14.8	NEMA 5-15P	54 lbs.
TQ3-10	10 ³ / ₈ " x 2"	14 ¹ / ₂ " x 21 ³ / ₁₆ " x 16 ³ / ₁₆ "	208 or 240	1780	8.6 or 7.4	NEMA 6-15P	54 lbs.
TQ3-20	10 ³ / ₈ " x 2"	14 ³ / ₈ " x 20 ¹ / ₁₆ " x 17 ⁹ / ₁₆ "	208	2470	11.9	NEMA 6-15P	54 lbs.
TQ3-20	10 ³ / ₈ " x 2"	14 ³ / ₈ " x 20 ¹ / ₁₆ " x 17 ⁹ / ₁₆ "	240	2470	10.3	NEMA 6-15P	54 lbs.
TQ3-20H	10 ³ / ₈ " x 2"	14 ³ / ₈ " x 20 ¹ / ₁₆ " x 17 ⁹ / ₁₆ "	208	2620	12.6	NEMA 6-20P	54 lbs.
TQ3-20H	10 ³ / ₈ " x 2"	14 ³ / ₈ " x 20 ¹ / ₁₆ " x 17 ⁹ / ₁₆ "	240	2620	10.9	NEMA 6-15P	54 lbs.

HORIZONTAL CONVEYOR TOASTERS

Model	Opening Dimensions (W x H)	Dimensions (W x D x H) Height includes legs	Voltage 50/60Hz	Watts	Amps	Plug	Approx. Ship Weight
TQ3-400* □	10 ³ / ₈ " x 2"	14 ³ / ₄ " x 20 ⁵ / ₈ " x 17 ¹ / ₈ "	120	1780	14.8	NEMA 5-15P	48 lbs.
TQ3-500	10 ³ / ₈ " x 2"	14 ³ / ₄ " x 20 ⁵ / ₈ " x 17 ¹ / ₈ "	208 or 240	2220	10.7 or 9.3	NEMA 6-15P	54 lbs.
TQ3-500H	10 ³ / ₈ " x 3"	14 ³ / ₄ " x 20 ⁵ / ₈ " x 17 ¹ / ₈ "	208 or 240	2220	10.7 or 9.3	NEMA 6-15P	54 lbs.
TQ3-900	10 ³ / ₈ " x 2"	14 ³ / ₄ " x 20 ⁵ / ₈ " x 17 ¹ / ₈ "	208 or 240	3020	14.5 or 12.6	NEMA 6-20P	50 lbs.
TQ3-900H	10 ³ / ₈ " x 3"	14 ³ / ₄ " x 20 ⁵ / ₈ " x 17 ¹ / ₈ "	208 or 240	3020	14.5 or 12.6	NEMA 6-20P	55 lbs.

Toasts Three Slices Wide


TQ3-2000	14 ¹ / ₈ " x 2"	18 ³ / ₄ " x 23 ⁵ / ₈ " x 17 ¹ / ₈ "	208 or 240	4020	19.3 or 16.8	NEMA 6-30P	67 lbs.
TQ3-2000H	14 ¹ / ₈ " x 3"	18 ¹ / ₂ " x 22 ³ / ₄ " x 17 ¹ / ₈ "	208 or 240	4020	19.3 or 16.8	NEMA 6-30P	67 lbs.

* Canadian model uses NEMA 5-20P.

□ TQ3-400 ships with a loose aluminum toast tray.

All Horizontal Conveyor Toaster Models Feature:

Cord Location: 6' cord – back of unit, lower right corner.



OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Designer Black Standard –

SS	Stainless Steel (excluding TQ3-10)
WRED	Designer Warm Red (excluding TQ3-10)
TQ3-30CORD	NEMA 6-30P cord (in lieu of standard cord on TQ3-500 and -900 series only)
SSINSERT	Stainless Steel toast tray insert (on TQ3-500 and -900 series only)
TQ3-RAMP	Extended feed ramp in lieu of existing ramp - adds 3" (excludes TQ3-10 and -400 models)
TQ3-RAMP-XL	XL extended feed ramp in lieu of existing ramp - adds 9" (on TQ3-500 and -900 models only)

COLORS AND FINISHES – INSIDE BACK COVER

Toast-Qwik® Conveyor Toasters

Flexibility and performance are yours with the Hatco Toast-Qwik® conveyor toasters. These toasters produce perfect golden toasting, from 300 to 1800 slices per hour. The power save mode conserves energy during non-peak serving times.

- Instant and precise adjustment of toast color with electronic infinite controls that regulate top and bottom heat
- Patented ColorGuard sensing system assures toast uniformity (excludes TQ-10)
- Opening height for H and HBA models is 3", for all other models the opening height is 2"
- Insulation and an interior fan provide cool surface temperatures
- Efficient design of front or rear discharge allows unit to be placed where it is most convenient – for sending product to the operator side or to the customer/server side
- TQ-1800 Series are 3-slice wide
- BA models toast one side only and are for bagels and buns, cut side up



TQ-10



TQ-800HBA

HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions (W x D x H) Height includes legs	Opening Dimensions (W x H)	Voltage/60Hz	kW	Plug	Capacity/ Minute ¹	Approx. Ship Weight
TQ-10*	14½" x 17¾" x 13¾"	10¾" x 2"	120	1.8	NEMA 5-15P	5 slices	42 lbs.
TQ-10	14½" x 17¾" x 13¾"	10¾" x 2"	208, 240	1.8	NEMA 6-15P	5 slices	42 lbs.

HORIZONTAL CONVEYOR TOASTERS

Model	Dimensions W x D x H ‡	Opening Dimensions (W x H)	Voltage/60Hz	kW	Plug	Capacity/ Minute ¹	Approx. Ship Weight
TQ-400*	14½" x 17¾" x 14⅞"	10¼" x 2"	120	1.8	NEMA 5-15P	6 slices	46 lbs.
TQ-400	14½" x 17¾" x 14⅞"	10¼" x 2"	208, 240	2.2	NEMA 6-15P	6 slices	46 lbs.
TQ-400BA*	14½" x 17¾" x 14⅞"	10¼" x 2"	120	1.8	NEMA 5-15P	6 slices	46 lbs.
TQ-400BA†	14½" x 17¾" x 14⅞"	10¼" x 2"	208, 240	1.9	NEMA 6-15P	6 slices	46 lbs.
TQ-400H	14½" x 17¾" x 15⅞"	10¼" x 3"	208, 240	2.2	NEMA 6-15P	6 slices	46 lbs.
TQ-800	14½" x 22¾" x 16⅞"	10⅞" x 2"	208	3.3	NEMA 6-20P	14 slices	64 lbs.
TQ-800**	14½" x 22¾" x 16⅞"	10⅞" x 2"	240	3.3	NEMA 6-15P	14 slices	64 lbs.
TQ-800BA†	14½" x 22¾" x 16⅞"	10⅞" x 2"	208	3.3	NEMA 6-20P	14 slices	62 lbs.
TQ-800BA***	14½" x 22¾" x 16⅞"	10⅞" x 2"	240	3.3	NEMA 6-15P	14 slices	62 lbs.
TQ-800H	14½" x 22¾" x 16⅞"	10⅞" x 3"	208	3.3	NEMA 6-20P	14 slices	62 lbs.
TQ-800H**	14½" x 22¾" x 16⅞"	10⅞" x 3"	240	3.3	NEMA 6-15P	14 slices	62 lbs.
TQ-800HBA†	14½" x 22¾" x 16⅞"	10⅞" x 3"	208	3.3	NEMA 6-20P	13 slices	65 lbs.
TQ-800HBA***	14½" x 22¾" x 16⅞"	10⅞" x 3"	240	3.3	NEMA 6-15P	13 slices	65 lbs.

Toasts Three Slices Wide

TQ-1800	18½" x 22¾" x 16⅞"	14⅞" x 2"	208, 240	4.4	NEMA 6-30P	30 slices	73 lbs.
TQ-1800BA†	18½" x 22¾" x 16⅞"	14⅞" x 2"	208, 240	4.6	NEMA 6-30P	30 slices	75 lbs.
TQ-1800H	18½" x 22¾" x 16⅞"	14⅞" x 3"	208, 240	4.7	NEMA 6-30P	30 slices	76 lbs.
TQ-1800HBA†	18½" x 22¾" x 16⅞"	14⅞" x 3"	208, 240	4.6	NEMA 6-30P	30 slices	74 lbs.

□ Toasting capacity may vary by product. Toasting of coated products not recommended.

‡ Height includes legs. TQ-400 and TQ-400BA, add 2½" to depth if using tray extension in rear. TQ-800, TQ-800BA, TQ-800H, TQ-800HBA, TQ-1800, TQ-1800BA, TQ-1800H and TQ-1800HBA, add 6½" to depth if using tray extension in rear.

* Canadian model uses NEMA 5-20P.

† BA models toast one side only and are for bagels and buns, cut side up.


*** Canadian model uses NEMA 6-20P.

All Conveyor Toaster Models Feature:

Cord Location: 6' cord – back of unit, lower right corner.

Toast-Qwik Toasters can be shipped Fed-Ex Ground or United Parcel Service.

OPTIONS AND ACCESSORIES – PAGE 207

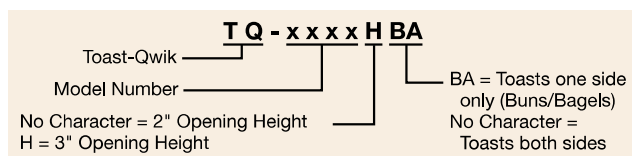



TQ-800H Toast Qwik®
Horizontal Conveyor Toaster

OPTIONS (available at time of purchase only, excludes TQ-10)

TQ-PWR-A Automatic Power Save Mode
(switches to Power Save Mode after 30 minutes of inactivity)

ACCESSORIES (available for purchase at any time)

TQRAMP Additional Extended Feed Guide adds 3"
(not available on TQ-1800 Series)

TQ2-SECURITY Control Cover and Bracket (not available on TQ-1800 series)



TQ-800 with
TQ2-SECURITY
accessory security
control cover

Toasters

TQ TOASTER AMP RATINGS

Model	120V/1 Ø	208V/1 Ø	240V/1 Ø
TQ-10	15.0	8.8	7.6
TQ-400	14.9	10.7	9.3
TQ-400BA	14.8	9.0	7.8
TQ-400H		10.3	9.3
TQ-800		16.0	13.9
TQ-800BA		15.8	13.7
TQ-800H		16.0	13.9
TQ-800HBA		15.8	13.7
TQ-1800		21.4	18.5
TQ-1800H		22.4	19.4
TQ-1800BA		22.0	19.1
TQ-1800HBA		22.0	19.1

Toast King® Conveyor Toasters

Designed for mid-to high-volume and constant flow applications, Hatco's proven reliability and performance makes the Toast King® Toasters the workhorse of your operation. These toasters use conveyor speed, not temperature, to determine toast color.

- Toasts a variety of bread products
- Stainless steel construction for years of trouble-free service
- Power-saving thermostat for energy savings during non-peak times
- Manual advance, speed control and cord with plug included
- Fully insulated for cooler operation
- Multiple metal sheathed toasting elements
- Toast storage area keeps bread warm and dry
- Capacity of 720-1500 slices per hour
- Three basket access for fast loading
- Top venting keeps heat away from the operator



TK-135B



TK-72

VERTICAL CONVEYOR TOASTERS

Model	Description	Dimensions** W x D x H	Basket Size W x H	Voltage Single Phase	Hz	Capacity/ Minute [□]	Plug	Approx. Ship Weight
TK-72*	Bread and Buns	18¼" x 17⅝" x 33¼"	10" x 4⅞"	208 or 240	60	12 slices	NEMA 6-20P	73 lbs.
TK-100	Bread and Buns	22¾" x 17⅝" x 33¼"	14½" x 4⅞"	208 or 240	60	16 slices	NEMA 6-30P	88 lbs.
TK-135B*	Buns Only	22¾" x 17⅝" x 33¼"	14½" x 4⅞"	208 or 240	60	22 slices	NEMA 6-30P	88 lbs.
TK-155B	3-Part Buns	22¾" x 17⅝" x 33¼"	14½" x 4⅞"	208 or 240	60	25 slices	NEMA 6-30P	88 lbs.

- ↔ Width included ¾" for manual advance knob. Depth includes tray extension of 3½".
□ Toasting capacity may vary by product. Toasting of coated products not recommended.
* Canadian model uses NEMA 6-30P.
* 240V model uses NEMA 6-20P (Canadian model uses NEMA 6-30).

All Vertical Conveyor Toaster Models Feature:

Max. Product Thickness: 1¼".

Cord Location: 4' cord – back of unit, lower left side.

OPTIONS (available at time of purchase only)

TK-SECURITY Control Cover, Bracket, Mounting Hardware and Fuse Cover

ACCESSORIES (available for purchase at any time)

4" LEGS 4" Adjustable Legs (4)

TK TOASTER AMP RATINGS

	208V/1 Ø	240V/1 Ø	
Model	Amps	Amps	kW
TK-72	19.4	16.8	4.0
TK-100	24.0	21.0	5.0
TK-135B	20.9	18.1	4.3
TK-155B	24.1	20.9	5.0

TK - x x x B

Toast King

B = Buns Model (toasts one side)
No Character = 2-Sided Toasting

Model Number