

Cafeterias • Buffets Supermarkets & Delis • Restaurants & Cafés



CSSBF-48-S in optional Bermuda Sand simulated stone built into a Bermuda Sand simulated stone countertop pg. 2



HCSBF-48-S in hot mode pg. 4



HCSBF-48-S in cold mode pg. 4



GRSSB-3618 in optional Bermuda Sand simulated stone built into a simulated stone countertop, shown below a **GR2AHL-42** Strip Heater pg. 7



GRSSB-3618 in standard Night Sky simulated stone built into a granite countertop pg. 7



HBGB-3618 built into a simulated stone countertop, shown below a GR2AHL-42 Strip Heater pg. 8



GRSB-30-I with accessory food pans, shown below a **GRAHL-36** Strip Heater *pg. 9*



GRSB-54-I with accessory food pans, shown below a **GRAL-96D** Strip Heater pg. 9



GRSBF-60-0 built into a simulated stone countertop with accessory food pans, shown below a GR2AL-96D Strip Heater pg. 10



Cold Simulated Stone Shelves Built-In

Hatco's new Cold Simulated Stone Shelves are a must for buffet lines in cafeterias, restaurants and much more!

These sturdy, foodsafe shelves are available in attractive simulated stone colors.

- Thermal break reduces condensation and temperature transfer (patent-pending)
- CSSB Cold Simulated Stone Built-In Shelves match the GRSSB Built-In Heated Simulated Stone Shelves for a fully integrated look
- Control box can be mounted on the front of the cabinet, 4' from center of shelf
- Condensing unit may be mounted up to 4' away from the center of shelf
- Models shipped with Electronic
 Temperature Control and condensing unit
- Easy serviceability with a sight glass, service valves, dryer/filter and a receiver. Long, flexible refrigerant line (ability to pullout condensing unit) for service
- Models with simulated stone are Swanstone[®]



COLD SIMULATED STONE SHELVES BUILT-IN

Model*	Usable Space W x D	Voltage Single Phase	Watts	Approximate Ship Weight
CSSB-2418	24" x 18"	120	804	120 lbs.
CSSB-3018	30" x 18"	120	804	132 lbs.
CSSB-3618	36" x 18"	120	804	145 lbs.
CSSB-4818	48" x 18"	120	1044	171 lbs.

* All models utilize R-404A Refrigerant.

All Cold Simulated Stone Shelf Built-In Models Feature:

Models Shipped with: An electronic temperature control and a condensing unit.

COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP

Model*	Usable Space W x D	Voltage Single Phase	Watts	Approximate Ship Weight
CSSBF-24-F	24" x 15½"	120	804	114 lbs.
CSSBF-24-I	24" x 19½"	120	804	124 lbs.
CSSBF-24-S	24" x 24"	120	804	134 lbs.
CSSBF-36-F	36" x 15½"	120	804	143 lbs.
CSSBF-36-I	36" x 19½"	120	1044	155 lbs.
CSSBF-36-S	36" x 24"	120	1044	167 lbs.
CSSBF-48-F	48" x 15½"	120	1044	144 lbs.
CSSBF-48-I	48" x 19½"	120	1044	173 lbs.
CSSBF-48-S	48" x 24"	120	1380	195 lbs.

* All models utilize R-404A Refrigerant.

All Cold Simulated Stone Shelf Built-In Flush Top Models Feature:

Models Shipped with: An electronic temperature control, a condensing unit and a 6' cord & plug set (NEMA 5-15P).

OPTIONS AND ACCESSORIES – PAGE 4

ONE (1) YEAR ON-SITE PARTS AND LABOR WARRANTY. AN ADDITIONAL FOUR (4) YEAR EXTENDED PARTS ONLY WARRANTY ON THE COMPRESSOR AVAILABLE AT THE TIME OF UNIT PURCHASE.



COUNTERTOP CUTOUT DIMENSIONS

Model	Width with 3/8" radii	Depth with ³ /8" radii
CSSB-2418	24 ³ /8"	18¾"
CSSB-3018	30¾"	18¾"
CSSB-3618	36¾"	18¾"
CSSB-4818	48 ³ /8"	18¾"
CSSBF-24-F	24 ³ /8"	15 ⁷ /8"
CSSBF-24-I	243/8"	19 ⁷ /8"
CSSBF-24-S	243/8"	24 3/4"
CSSBF-36-F	36 3/8"	15 ⁷ /8"
CSSBF-36-I	36 %"	19 ⁷ /8"
CSSBF-36-S	36 3/8"	24 3/4"
CSSBF-48-F	48 ³ /8"	15 ⁷ /8"
CSSBF-48-I	483/8"	197/8"
CSSBF-48-S	48 ³ /8"	24 3/4"
Model	Width	Height
Control Box	9½"	7 ³ /4"

Cold \underline{C} \underline{SS} $\underline{B(F)}$ - \underline{xx} $\underline{X(x)}$ Simulated Stone Shelf $F = 15\%^{"}$, I = 19%", S = 24" B = Built-InBF = Built-In Flush Width of Shelf (Inches)




Hot/Cold Shelves Built-In

Give your operation ultimate flexibility with Hatco's innovative Hot/Cold Shelves Built-In (patent-pending). Available in our signature Aluminum Hardcoat or in simulated stone, they cold and cold to heated shelf!

- Thermal break reduces condensation and temperature transfer (patent-pending)
- Shelves change modes from hot to cold or vice versa in as little as 30 minutes
- Hardcoat aluminum models (HCSBF) are top mount, while simulated stone models (HCSSBF, HCSSB) are bottom mount, flush with the countertop
- easily transition between a heated to Control box and the condensing unit may be mounted on the front of the cabinet, 4' from center of shelf



- The flush mount control comes standard with a 4' lead wire
- For an integrated look:
 - HCSBF Hot/Cold Shelves match the **GRSBF** Built-In Heated Shelves
 - HCSSBF Hot/Cold Shelves match the **GRSSBF** Built-In Heated Shelves
 - HCSSB Hot/Cold Shelves match the **GRSSB Built-In Heated Shelves**
- Models with simulated stone are Swanstone[®]





in optional Bermuda Sand simulated stone

HOT/COLD SIMULATED STONE SHELVES BUILT-IN

Model*	Usable Space W x D	Voltage Single Phase	Watts Rated	Watts Hot Watts	Approximate Ship Weight
HCSSB-2418	24" x 18"	120	804	405	120 lbs.
HCSSB-3018	30" x 18"	120	804	510	150 lbs.
HCSSB-3618	36" x 18"	120	804	610	170 lbs.
HCSSB-4818	48" x 18"	120	1044	815	195 lbs.

* All models utilize R-404A Refrigerant.

All Hot/Cold Simulated Stone Shelf Built-In Models Feature:

Models Shipped with: An electronic temperature control and a condensing unit.

HOT/COLD SIMULATED STONE SHELVES BUILT-IN FLUSH TOP

Model×	Usable Space W x D	Voltage Single Phase	Watts Rated	Watts Hot Watts	Approximate Ship Weight
HCSSBF-24-F	24" x 15½"	120	804	355	115 lbs.
HCSSBF-24-I	24" x 19½"	120	804	445	131 lbs.
HCSSBF-24-S	24" x 24"	120	804	550	150 lbs.
HCSSBF-36-F	36" x 15½"	120	804	530	146 lbs.
HCSSBF-36-I	36" x 19½"	120	1044	670	167 lbs.
HCSSBF-36-S	36" x 24"	120	1044	825	198 lbs.
HCSSBF-48-F	48" x 15½"	120	1044	710	175 lbs.
HCSSBF-48-I	48" x 19½"	120	1044	890	214 lbs.
HCSSBF-48-S	48" x 24"	120	1380	1100	220 lbs.

HCSSBF-48-S in standard Night Sky simulated stone

COUNTERTOP CUTOUT DIMENSIONS


Model	Width with 3/8" radii	Depth with 3/8" radii
HCSSB-2418	24 ³ /8"	18¾"
HCSSB-3018	30 ³ /8"	18¾"
HCSSB-3618	36¾"	18%"
HCSSB-4818	48 ³ /8"	18%"
HCSSBF-24-F	24 ³ /8"	15 ⁷ /8"
HCSSBF-24-I	24 ³ /8"	197/8"
HCSSBF-24-S	24 ³ /8"	24%"
HCSSBF-36-F	363/8"	157/8"
HCSSBF-36-I	363/8"	197/8"
HCSSBF-36-S	36³⁄8"	24%"
HCSSBF-48-F	48 ³ /8"	157/8"
HCSSBF-48-I	48 ³ /8"	197/8"
HCSSBF-48-S	48 ³ /8"	24%"
Model	Width	Height
Control Box	145/8"	73/4"

* All models utilize R-404A Refrigerant.

All Hot/Cold Simulated Stone Shelf Built-In Flush Top Models Feature: Models Shipped with: An electronic temperature control, a condensing unit and a 6' cord & plug set (NEMA 5-15P).

OPTIONS AND ACCESSORIES – PAGE 4

ONE (1) YEAR ON-SITE PARTS AND LABOR WARRANTY. AN ADDITIONAL FOUR (4) YEAR EXTENDED PARTS ONLY WARRANTY ON THE COMPRESSOR AVAILABLE AT THE TIME OF UNIT PURCHASE.



Sturgeon Bay, WI 54235 U.S.A. Telephone: (800) 558-0607 or (414) 671-6350 hatcocorp.com



Hot/Cold Shelves Built-In continued

- Models shipped with Electronic Temperature Control and condensing unit
- Easy serviceability with a sight glass, service valves, dryer/filter and a receiver. Long, flexible refrigerant line (ability to pullout condensing unit) for service





HOT/COLD SHELVES BUILT-IN FLUSH TOP (Aluminum Hardcoat)

Model*	Overall Dimensions W x D	Usable Space W x D	Voltage Single Phase	Watts Rated	Watts Hot Watts	Approximate Ship Weight
HCSBF-24-F	25½" x 17"	24" x 15½"	120	804	355	119 lbs.
HCSBF-24-I	25½" x 21"	24" x 19½"	120	804	455	126 lbs.
HCSBF-24-S	251⁄2" x 251⁄2"	24" x 24"	120	804	550	140 lbs.
HCSBF-36-F	37½" x 17"	36" x 15½"	120	804	530	155 lbs.
HCSBF-36-I	37½" x 21"	36" x 19½"	120	1044	670	159 lbs.
HCSBF-36-S	37½" x 25½"	36" x 24"	120	1044	825	164 lbs.
HCSBF-48-F	49½" x 17"	48" x 15½"	120	1044	710	165 lbs.
HCSBF-48-I	49½" x 21"	48" x 19½"	120	1044	890	172 lbs.
HCSBF-48-S	49½" x 25½"	48" x 24"	120	1380	1100	204 lbs.
•• • • • • • • • • • • • • •						

* All models utilize R-404A Refrigerant.

All Hot/Cold Shelf Built-In Flush Top Models Feature:

Models Shipped with: An electronic temperature control, a condensing unit and a 6' cord & plug set (NEMA 5-15P).

OPTIONS (available at time of purchase only)

Simulated Stone Colors (CSSB, CSSBF, HCSSB, HCSSBF models only) – Non-standard colors are non-returnable – Night Sky Standard –				
SS-GGRAN	Gray Granite			
SS-BSAND	Bermuda Sand			
SS-NSKY	Night Sky			
EWC	Additional Four (4) Year Extended Parts Only Warranty on the Compressor			

ACCESSORIES (available for purchase at any time)

Self-Adhesive Silicone Gasket (CSSB, CSSBF, HCSSB, HCSSBF models only) -

SILGASK	Gasket only – 121/2'
SILGASK-SBK	Gasket with Black Silicone Caulk
SILGASK-SGR	Gasket with Gray Silicone Caulk

COLORS AND FINISHES – PAGE 11

COUNTERTOP CUTOUT DIMENSIONS

	Width		Dej	oth
Model	Minimum	Maximum	Minimum	Maximum
HCSBF-24-F	245/8"	25"	16 ¹ /8"	16½"
HCSBF-24-I	245/8"	25"	201/8"	20½"
HCSBF-24-S	245/8"	25"	24 ³ / ₄ "	25"
HCSBF-36-F	365/8"	37"	16 ¹ /8"	16½"
HCSBF-36-I	365/8"	37"	201/8"	20½"
HCSBF-36-S	365/8"	37"	24 ³ / ₄ "	25"
HCSBF-48-F	485/8"	49"	16 ¹ /8"	16½"
HCSBF-48-I	485/8"	49"	201/8"	20½"
HCSBF-48-S	485/8"	49"	24 ³ /4"	25"
Model	Width		Hei	ght
Control Box	14 ⁵ /8" 7 ³ /4"		/4"	

ONE (1) YEAR ON-SITE PARTS AND LABOR WARRANTY. AN ADDITIONAL FOUR (4) YEAR EXTENDED PARTS ONLY WARRANTY ON THE COMPRESSOR AVAILABLE AT THE TIME OF UNIT PURCHASE.





Cold Shelves Built-In Flush Top

Hatco's Cold Built-In Flush Top Shelves are designed to keep your pre-chilled beverages, hors d'oeuvres, side dishes, buffet items and more in the perfect chill zone.

- Thermal break reduces condensation and Easy serviceability with a sight glass, temperature transfer (patent-pending)
- Top mounted hardcoat aluminum surface
- The CSBF Cold Built-In Shelves match the GRSBF Built-In Heated Shelves for a fully integrated look
- Long, flexible refrigerant line offers the ability to pullout condensing unit for service
- service valves, dryer/filter and a receiver
- Control comes standard with a 4' lead wire
- Control box can be mounted on the front of the cabinet, 4' from center of shelf
- Condensing unit may be mounted up to 4' away from the center of shelf



COLD SHELVES BUILT-IN FLUSH TOP (Aluminum Hardcoat)

Model*	Overall Dimensions W x D	Usable Space W x D	Voltage Single Phase	Watts	Approximate Ship Weight
CSBF-24-F	25½" x 17"	24" x 15½"	120	804	108 lbs.
CSBF-24-I	251⁄2" x 21"	24" x 19½"	120	804	116 lbs.
CSBF-24-S	251⁄2" x 251⁄2"	24" x 24"	120	804	124 lbs.
CSBF-36-F	37½" x 17"	36" x 15½"	120	804	121 lbs.
CSBF-36-I	37½" x 21"	36" x 19½"	120	1044	137 lbs.
CSBF-36-S	37½" x 25½"	36" x 24"	120	1044	151 lbs.
CSBF-48-F	49½" x 17"	48" x 15½"	120	1044	138 lbs.
CSBF-48-I	49½" x 21"	48" x 19½"	120	1044	157 lbs.
CSBF-48-S	49½" x 25½"	48" x 24"	120	1380	177 lbs.

* All models utilize R-404A Refrigerant.


All Cold Shelf Built-In Flush Top Models Feature:

Models Shipped with: An electronic temperature control, a condensing unit and a 6' cord & plug set (NEMA 5-15P).

OPTIONS (available at time of purchase only) EWC Additional Four (4) Year Extended Parts Only Warranty on the Compressor

COUNTERTOP CUTOUT DIMENSIONS

	Width		De	pth
Model	Min	Max	Min	Max
CSBF-24-F	243/4"	25"	16 ¹ /8"	16½"
CSBF-24-I	243/4"	25"	201/8"	201⁄2"
CSBF-24-S	243/4"	25"	243/4"	25"
CSBF-36-F	363/4"	37"	16 ¹ /8"	16½"
CSBF-36-I	363/4"	37"	201/8"	201⁄2"
CSBF-36-S	363/4"	37"	243/4"	25"
CSBF-48-F	483/4"	49"	16 ¹ /8"	16½"
CSBF-48-I	48 ³ /4"	49"	20 ¹ /8"	201⁄2"
CSBF-48-S	48¾"	49"	243/4"	25"
Model	Wi	Width		ght
Control Box	9½" 7 ³ /4"			/4"





Cold Shelves Undermount

Cold Shelves Undermount offer the same great performance as the Cold Built-In Flush Top Shelves, but are mounted directly against the underside of a granite, quartz, stainless steel or appropriate simulated stone countertop (no cutout required). Cooling transfers through the countertop to the top surface, without puncturing, for a true, seamless look.

- Mount under appropriate countertop material for a seamless look
- Approved materials include granite and quartz up to 1³/₁₆", Swanstone[®] as provided by Hatco and certain stainless steel or aluminum surfaces approved by Hatco. Please contact the factory for applications with other material*
- Aluminum surface
- Long, flexible refrigerant line offers the ability to pullout condensing unit for service

- Easy serviceability with a sight glass, service valves, dryer/filter and a receiver
- Control box can be mounted on the front of the cabinet, 4' from center of shelf
- Condensing unit may be mounted up to 4' away from the center of shelf





COLD SHELVES UNDERMOUNT (Aluminum)

Model*	Usable Space W x D	Voltage Single Phase	Watts	Approximate Ship Weight
CSU-24-F	24" x 15½"	120	804	118 lbs.
CSU-24-I	24" x 19½"	120	804	115 lbs.
CSU-24-S	24" x 24"	120	804	130 lbs.
CSU-36-F	36" x 15½"	120	804	143 lbs.
CSU-36-I	36" x 19½"	120	1044	140 lbs.
CSU-36-S	36" x 24"	120	1044	144 lbs.
CSU-48-F	48" x 15½"	120	1044	141 lbs.
CSU-48-I	48" x 19½"	120	1044	173 lbs.
CSU-48-S	48" x 24"	120	1380	176 lbs.
* All modele utilize	D 404A Defrigerent			


* All models utilize R-404A Refrigerant.

All Cold Shelf Undermount Models Feature:

Models Shipped with: An electronic temperature control, a condensing unit and a 6' cord & plug set (NEMA 5-15P). *Make structural modifications or add bracing underneath the countertop to ensure countertop will support the weight of the unit and its contents.

OPTIONS (available at time of purchase only)

EWC Additional Four (4) Year Extended Parts Only Warranty on the Compressor



countertop



Glo-Ray® Built-In Rectangular Heated Simulated Stone Shelves

Match the heat zone to your countertops with Hatco's Glo-Ray® Heated Simulated Stone Shelves. The built-in foodsafe shelves are ideal for buffet lines or as hors d'oeuvre displays. These unique warmers will safely hold food hot while blending in with your décor.

NOTE: For any size GRSSB, the next larger size GRA or GR2A

Strip Heater will fit over the top. For example, a GRSSB-3018 will


require a GRA-36 or GR2A-36. The GRA will have a tight fit to the

frame of the base. The GR2A will have approximately a 4" space.

 Shelves are made of approved foodsafe materials

- Shelves come in three (3) simulated stone colors: Gray Granite, Bermuda Sand and Night Sky (standard) - non-standard colors are non-returnable
- Models with simulated stone are Swanstone[®]
- · Features a lighted rocker switch and thermostatically-controlled heated base
- Includes control box with 3' conduit and 6' cord & plug set

Standard control box



Be sure to check out our

GRSSB-3618 in optional Bermuda Sand

built into a Bermuda Sand simulated stone



BUILT-IN RECTANGULAR HEATED SIMULATED STONE SHELVES

Model^	Dimensions W x D x H	Voltage Single Phase	Watts	Plug	Ship Weight
GRSSB-2418	25 ⁵ / ₈ " x 19 ⁵ / ₈ " x 2 ¹ / ₄ "	120	635	NEMA 5-15P	30 lbs.
GRSSB-3018	315⁄8" x 195⁄8" x 21⁄4"	120	780	NEMA 5-15P	35 lbs.
GRSSB-3618	375/8" x 195/8" x 21/4"	120	930	NEMA 5-15P	40 lbs.
GRSSB-4818	495%" x 195%" x 21⁄4"	120	1270	NEMA 5-15P	51 lbs.
GRSSB-6018	615%" x 195%" x 21⁄4"	120	1560	NEMA 5-20P	56 lbs.
GRSSB-7218	735⁄8" x 195⁄8" x 21⁄4"	120	1860	NEMA 5-20P	70 lbs.

^ Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 200°F.

All Built-In Rectangular Heated Simulated Stone Shelf Models Feature:

Cord Location: Cord is attached to control box.

OPTIONS (available at time of purchase only)

Designer Colors (Flush Mount Control Box Bezel) – Non-standard colors are non-returnable –

Debiginer Delete (1 labi	
RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper
Simulated Stone Color	rs – Non-standard colors are non-returnable – Night Sky Standard –
SS-GGRAN	Gray Granite
SS-BSAND	Bermuda Sand
SS-NSKY	Night Sky
GRSSB-FLUSH-ITC	Flush Mount Electronic Control Box with Lighted Power Switch
GRSSB-FLUSH-TSTAT	Flush Mount Thermostatic Control Box with Lighted Power Switch
COND-6	6' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)
COND-10	10' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)
GRSSB-REC	Built-In Heated Simulated Stone Shelf with Recessed Top

Optional GRSSB-FLUSH-TSTAT

flush mount recessed thermostatic control box with lighted On/Off rocker switch and angled recessed controls





Optional GRSSB-FLUSH-ITC flush mount recessed electronic control box with lighted On/ Off rocker switch and angled recessed controls

COLORS AND FINISHES – PAGE 11

BUILT-IN RECTANGULAR HEATED SIMULATED STONE COUNTERTOP CUTOUT DIMENSIONS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
GRSSB-2418	245/8"	241/8"	185⁄%"	181/8"
GRSSB-3018	305%"	301/8"	18%"	181/8"
GRSSB-3618	36%"	361/8"	18%"	181/8"
GRSSB-4818	485/8"	481/8"	185⁄%"	181/8"
GRSSB-6018	605%"	601/8"	18%"	181/8"
GRSSB-7218	72%"	721/8"	185⁄8"	181/8"
OPTIONAL CONTRO	L BOX CUT	OUT DIMENS	SIONS	
Model	Width	Height	Depth	
GRSSB-FLUSH-ITC	51/8"	6 ³ /8"	43/4"	
GRSSB-FLUSH-TSTAT	51/8"	6¾"	4"	

	ALL GLO-RAY® BLANKET HEATING ELEMENTS WARRANTED AGAINST BURNOUT FOR ONE (1) YEAR.
Glo-Ray ——— Heated Shelf ——— Simulated Stone –	GRSSB-xx xx Depth of Shelf (Inches) Width of Shelf (Inches) B = Built-In Rectangular

(414) 671-6350 hatcocorp.com



Built-In Rectangular Heated Black Glass Shelves

Hatco Heated Black Glass Shelves have a heated ceramic glass top to create uniform heat across the entire surface and are made of approved foodsafe materials. Adjustable thermostatic controls allow surface temperature to be controlled easily.

- Shelves are made of approved foodsafe materials
- Equipped with an attached stainless steel (standard) trim mounting ring (Designer Black available)
- Includes control box with 3' conduit and 6' cord & plug set
- Lighted On/Off rocker switch



HBGB-2418 with optional Designer Black trim ring

RIJII T-IN RECTANGIJI AR HEATED BI ACK GLASS SHELVES

tight fit to the frame of the base. The GR2A will have approximately a 4" space.

	DOILI-IN NEO IANGOLAN NEATED DEACH GEAGS GILEVES							
Model^	Dimensions W x D x H	Voltage Single Phase	Watts	Plug	Ship Weight			
HBGB-2418	25¾" x 19¾" x 2¼"	120	425	NEMA 5-15P	32 lbs.			
HBGB-3018	31¾" x 19¾" x 2¼"	120	525	NEMA 5-15P	37 lbs.			
HBGB-3618	37¾" x 19¾" x 2¼"	120	630	NEMA 5-15P	40 lbs.			
HBGB-4818+	49¾" x 19¾" x 2¼"	120	850	NEMA 5-15P	50 lbs.			
HBGB-6018+	61¾" x 19¾" x 2¼"	120	1050	NEMA 5-15P	63 lbs.			
HBGB-7218+	73¾" x 19¾" x 2¼"	120	1260	NEMA 5-15P	74 lbs.			

^ Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 200°F. +Units 48" and larger are constructed of two equal sized pieces of glass which create a seam.

All Built-In Rectangular Heated Black Glass Shelf Models Feature: Cord Location: Cord is attached to control box.

OPTIONS (available at time of purchase only)

Designer Colors (Flush Mount Control Box Bezel) -

BLACK	Black
HBGB-TRIM-BLK	Designer Black Powdercoated Trim Ring
HBGB-FLUSH-ITC	Flush Mount Electronic Control Box with Lighted Power Switch
HBGB-FLUSH-TSTAT	Flush Mount Thermostatic Control Box with Lighted Power Switch
COND-6	6' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)
COND-10	10' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)
HBGB-REC	Built-In Heated Black Glass Shelf with Recessed Top

Optional HBGB-FLUSH-ITC

flush mount recessed electronic control box with lighted On/ Off rocker switch and angled recessed controls



Optional HBGB-FLUSH-TSTAT flush mount recessed thermostatic control box with lighted On/Off rocker switch and angled recessed controls

BUILT-IN HEATED BLACK GLASS COUNTERTOP CUTOUT DIMENSIONS

Model	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
HBGB-2418	245%"	247/8"	185%"	18%"
HBGB-3018	305%"	307/8"	185%"	18%"
HBGB-3618	365%"	367/8"	185⁄8"	18%"
HBGB-4818	485%"	487/8"	185%"	18%"
HBGB-6018	605/8"	607/8"	185/8"	187⁄8"
HBGB-7218	725/8"	721/8"	185⁄8"	181/8"
OPTIONAL CONTR	ROL BOX CUTOUT D	IMENSIONS		

Model	Width	Height	Depth	
HBGB-FLUSH-ITC	51/8"	63/8"	41/8"	
HBGB-FLUSH-TSTAT	51/8"	6¾"	4"	

ALL GLO-RAY® BLANKET HEATING ELEMENTS WARRANTED AGAINST BURNOUT FOR ONE (1) YEAR.

HBG B - xx xx Depth of Shelf Heated Black Glass (Inches) Width of Shelf (Inches) Built-In



Glo-Ray® Built-In Rectangular Recessed Top Heated Shelves

Let Hatco add heat to your serving surface with the Glo-Ray® Built-In Rectangular Heated Shelf. This 1/2" recessed top foodwarmer has a hardcoated aluminum surface and blanket-type element for uniform heat to extend your food holding time.

- Uniform heat distribution with hardcoated aluminum surface and blanket-type element
- 3' flexible conduit channels power lines from the shelf to a control box

Be sure to check out our

Hot/Cold and Cold only Built-In Shelves for a seamless look

- Standard controller includes control thermostat, illuminated power switch and mounting brackets
- Thermostatically-controlled heated base

GRSB-24-I

BUILT-IN RECTANGULAR HEATED SHELVES WITH RECESSED TOP

	Dimensions	Cut-Out D	imensions	Voltage		
Model^	W x D x H	MinMax. Width	MinMax. Depth	Single Phase	Watts	Ship Weight
GRSB-24-F	25½" x 17" x 2 ⁷ / ₈ "	241/2"-243/4"	16"-161⁄4"	120	420	25 lbs.
GRSB-24-I	25½" x 21" x 21/8"	24 ¹ /2"-24 ³ /4"	20"-20 ¹ /4"	120	550	28 lbs.
GRSB-24-0	25½" x 31½" x 2¾"	241/2"-243/4"	301/2"-303/4"	120	790	33 lbs.
GRSB-30-F	31½" x 17" x 2%"	301/2"-303/4"	16"-16¼"	120	505	25 lbs.
GRSB-30-I	31½" x 21" x 27⁄8"	301/2"-303/4"	20"-201/4"	120	665	29 lbs.
GRSB-30-0	31½" x 31½" x 2%"	301/2"-303/4"	301/2"-303/4"	120	950	37 lbs.
GRSB-36-F	37½" x 17" x 2 ⁷ / ₈ "	361/2"-363/4"	16"-16¼"	120	590	26 lbs.
GRSB-36-I	37½" x 21" x 21/8"	361/2"-363/4"	20"-201/4"	120	780	30 lbs.
GRSB-36-0	37½" x 31½" x 2%"	361/2"-363/4"	301/2"-303/4"	120	1110	37 lbs.
GRSB-42-F	43½" x 17" x 2 ⁷ / ₈ "	421/2"-423/4"	16"-16¼"	120	685	30 lbs.
GRSB-42-I	43½" x 21" x 2 ⁷ / ₈ "	421/2"-423/4"	20"-201/4"	120	885	37 lbs.
GRSB-42-0	43½" x 31½" x 2%"	421/2"-423/4"	301/2"-303/4"	120	1270	46 lbs.
GRSB-48-F	49½" x 17" x 2 ⁷ / ₈ "	481/2"-483/4"	16"-16¼"	120	770	33 lbs.
GRSB-48-I	49½" x 21" x 21/8"	481/2"-483/4"	20"-201/4"	120	1000	40 lbs.
GRSB-48-0	49½" x 31½" x 2%"	481/2"-483/4"	301/2"-303/4"	120	1430	68 lbs.
GRSB-54-I	55½" x 21" x 2 ⁷ / ₈ "	54½"-54¾"	20"-201/4"	120	1110	45 lbs.
GRSB-60-F	61½" x 17" x 2½"	60 ¹ /2"-60 ³ /4"	16"-16¼"	120	950	40 lbs.
GRSB-60-I	61½" x 21" x 21/8"	601/2"-603/4"	20"-201/4"	120	1220	43 lbs.
GRSB-60-0	61½" x 31½" x 2%"	60 ¹ /2"-60 ³ /4"	301/2"-303/4"	120	1750	64 lbs.
GRSB-66-I	67½" x 21" x 27/8"	66 ¹ /2"-66 ³ /4"	20"-201/4"	120	1330	49 lbs.
GRSB-72-F	73½" x 17" x 2%"	721/2"-723/4"	16"-16¼"	120	1130	43 lbs.
GRSB-72-I	73½" x 21" x 27/8"	721/2"-723/4"	20"-201/4"	120	1440	50 lbs.
GRSB-72-0	73½" x 31½" x 2 ⁷ /8"	721/2"-723/4"	301/2"-303/4"	208, 240	2070	68 lbs.



^ Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 200°F.

All Built-In Rectangular Heated Shelf Models with Recessed Top Feature:


Plugs: All Models Ending in -F and -I and Models 24" through 48" Wide Ending in -O: NEMA 5-15P.

GRSB-72-0: NEMA 6-15P. Usable Heated Shelf Space: Width of unit minus 11/2" x depth of unit minus 11/2". Cord Location: Cord is attached to control box.

OPTIONS (available at time of purchase only)

Designer Colors (Flush	Mount Control Box Be	ezel only) – Non-standard colors are non-returnable –
	RED Warm Red	WHITE White Granite COPPER Antique Copper
	BLACK Black	NAVY Navy Blue
	GRAY Gray Granite	GREEN Hunter Green
GRSB-FLUSH-ITC	Flush Mount Electronic	Control Box with Lighted Power Switch*
GRSB-FLUSH-TSTAT	Flush Mount Thermosta	atic Control Box with Lighted Power Switch*
COND-6	6' Conduit in lieu of sta	andard 3' (used with Flush Mount ITC Control Box)
COND-10	10' Conduit in lieu of st	tandard 3' (used with Flush Mount ITC Control Box)
* See page 7 for control box (cutout dimensions.	

FOOD PANS AND TRIVETS - PAGE 11 **COLORS AND FINISHES – PAGE 11**



Optional GRSB-FLUSH-TSTAT flush mount recessed thermostatic control box with lighted On/Off rocker switch and angled recessed controls



ALL GLO-RAY® BLANKET HEATING ELEMENTS WARRANTED AGAINST BURNOUT FOR ONE (1) YEAR.

Optional GRSB-FLUSH-ITC

flush mount recessed *electronic* control box with lighted On/ Off rocker switch and angled recessed controls

or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approximately a 4" space.



NOTE: For any size GRSB, the next larger size GRA or **GR2A** Strip Heater will fit over the top. For example, a GRSB-30 will require a GRA-36

GRSB-60-0: NEMA 5-20P.



Glo-Ray® Built-In Rectangular Flush Top Heated Shelves

Let Hatco add heat to your serving surface with the Glo-Ray® Built-In Rectangular Heated Shelf. This flush top foodwarmer has a hardcoated aluminum surface and blanket-type element for uniform heat to extend your food holding time.

- Uniform heat distribution with hardcoated aluminum surface and blanket-type element
- 3' flexible conduit channels power lines from the shelf to a control box
- Thermostatically-controlled heated base
- Standard controller includes control thermostat, illuminated power switch and mounting brackets
- Model widths from 25¹/₂" to 73¹/₂"
- Optional stainless steel surface



GRSBF-60-0 built into a Bermuda Sand simulated stone countertop with accessory pizza pans, shown below a GR2AL-96D Strip Heater

BUILT-IN RECTANGULAR HEATED SHELVES WITH FLUSH TOP

	Dimensions	Cut-Out D	imensions	Voltage		
Model^	W x D x H	MinMax. Width	MinMax. Depth	Single Phase	Watts	Ship Weight
GRSBF-24-F	25½" x 17" x 2¼"	24 ¹ /2"-24 ³ /4"	16"-16 ¹ /4"	120	420	28 lbs.
GRSBF-24-I	25½" x 21" x 2¼"	241/2"-243/4"	20"-201/4"	120	550	28 lbs.
GRSBF-24-S	25½" x 25½" x 2¼"	241/2"-243/4"	241/2"-243/4"	120	700	32 lbs.
GRSBF-24-0	25½" x 31½" x 2¼"	241/2"-243/4"	301/2"-303/4"	120	790	35 lbs.
GRSBF-30-F	31½" x 17" x 2¼"	301/2"-303/4"	16"-16¼"	120	505	24 lbs.
GRSBF-30-I	31½" x 21" x 2¼"	301/2"-303/4"	20"-201/4"	120	665	30 lbs.
GRSBF-30-S	31½" x 25½" x 2¼"	301/2"-303/4"	241/2"-243/4"	120	825	33 lbs.
GRSBF-30-0	31½" x 31½" x 2¼"	301/2"-303/4"	301/2"-303/4"	120	950	37 lbs.
GRSBF-36-F	37½" x 17" x 2¼"	361/2"-363/4"	16"-16 ¹ /4"	120	590	32 lbs.
GRSBF-36-I	37½" x 21" x 2¼"	361/2"-363/4"	20"-201/4"	120	780	30 lbs.
GRSBF-36-S	37½" x 25½" x 2¼"	361/2"-363/4"	241/2"-243/4"	120	950	35 lbs.
GRSBF-36-0	37½" x 31½" x 2¼"	361/2"-363/4"	301/2"-303/4"	120	1110	37 lbs.
GRSBF-42-F	43½" x 17" x 2¼"	421/2"-423/4"	16"-161/4"	120	685	38 lbs.
GRSBF-42-I	43½" x 21" x 2¼"	421/2"-423/4"	20"-201/4"	120	885	32 lbs.
GRSBF-42-S	43½" x 25½" x 2¼"	421/2"-423/4"	241/2"-243/4"	120	1100	40 lbs.
GRSBF-42-0	43½" x 31½" x 2¼"	421/2"-423/4"	301/2"-303/4"	120	1270	48 lbs.
GRSBF-48-F	49½" x 17" x 2¼"	481/2"-483/4"	16"-16 ¹ /4"	120	770	35 lbs.
GRSBF-48-I	49½" x 21" x 2¼"	481/2"-483/4"	20"-201/4"	120	1000	40 lbs.
GRSBF-48-S	49½" x 25½" x 2¼"	481/2"-483/4"	241/2"-243/4"	120	1225	42 lbs.
GRSBF-48-0	49½" x 31½" x 2¼"	481/2"-483/4"	301/2"-303/4"	120	1430	48 lbs.
GRSBF-60-F	61½" x 17" x 2¼"	601/2"-603/4"	16"-16¼"	120	950	41 lbs.
GRSBF-60-I	61½" x 21" x 2¼"	60 ¹ /2"-60 ³ /4"	20"-201/4"	120	1220	48 lbs.
GRSBF-60-S	61½" x 25½" x 2¼"	601/2"-603/4"	241/2"-243/4"	120	1500	55 lbs.
GRSBF-60-0	61½" x 31½" x 2¼"	601/2"-603/4"	301/2"-303/4"	120	1750	64 lbs.
GRSBF-72-F	73½" x 17" x 2¼"	721/2"-723/4"	16"-16¼"	120	1130	44 lbs.
GRSBF-72-I	73½" x 21" x 2¼"	721/2"-723/4"	20"-201/4"	120	1440	52 lbs.
GRSBF-72-S	73½" x 25½" x 2¼"	721/2"-723/4"	241/2"-243/4"	120	1750	59 lbs.
GRSBF-72-0	73½" x 31½" x 2¼"	72 ¹ /2"-72 ³ /4"	301/2"-303/4"	208, 240	2070	68 lbs.

GR2A Strip Heater will fit over the top. For example, a GRSBF-30 will require a GRA-36 or GR2A-36. The GRA will have a tight fit to the frame of the base. The GR2A will have approx. a 4" space.

NOTE: For any size GRSBF, the next larger size GRA or



Recommended for use in a metallic countertop. For other surfaces, verify that the material is suitable for temperatures up to 200°F.

All Built-In Rectangular Heated Shelf Models with Flush Top Feature:

Plugs: All Models Ending in -F and -I and Models 24" through 48" Wide Ending in -S and -O: NEMA 5-15P. GRSBF-60-S, GRSBF-60-O and GRSBF-72-S: NEMA 5-20P. GRSBF-72-O: NEMA 6-15P.

Usable Heated Shelf Space: Entire surface. Cord Location: Cord is attached to control box.

> ALL GLO-RAY® BLANKET HEATING ELEMENTS WARRANTED AGAINST BURNOUT FOR ONE (1) YEAR.

GIR S B F - X Glo-Ray Heated Shelf Built-In Flat Top Model Width (Inches)	Heated I F = 17" I = 21" S = 25 ¹ /2
Model Width (Inches)	$0 = 31^{1/2}$

Depth

OPTIONS (available at time of purchase only)

Designer Colors (Flush Mount Control Box Bezel only) – Non-standard colors are non-returnable –						
	RED	Warm Red	WHITE	White Granite	COPPER Antique Copper	
	BLACK	Black	NAVY	Navy Blue		
	GRAY	Gray Granite	GREEN	Hunter Green		
GRSBF-SS	Stainless Steel Surface in lieu of Hardcoat (GRSBF models only)					
GRSB-FLUSH-ITC	Flush Mount Electronic Control Box with Lighted Power Switch*					
GRSB-FLUSH-TSTAT	LUSH-TSTAT Flush Mount Thermostatic Control Box with Lighted Power Switch*					
COND-6	6' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)					
COND-10	ND-10 10' Conduit in lieu of standard 3' (used with Flush Mount ITC Control Box)					
* See page 7 for control box cutout dimensions.						

FOOD PANS AND TRIVETS - PAGE 11 **COLORS AND FINISHES – PAGE 11**



Optional GRSB-FLUSH-ITC flush mount recessed *electronic* control box with lighted On/ Off rocker switch and angled recessed controls

Optional GRSB-FLUSH-TSTAT flush mount recessed thermostatic control box with lighted On/Off rocker switch and angled recessed controls






Food Pans And Trivets







FOOD PANS	
Model	Description
ALUM PAN	Half-Size Sheet Pan – 18"W x 13"D
18"SHEET PAN	Full-Size Sheet Pan – 18"W x 26"D
14"PIZZA PAN	Perforated Pizza Pan – 14" Diameter
16"PIZZA PAN	Perforated Pizza Pan – 16" Diameter
18"PIZZA PAN	Perforated Pizza Pan – 18" Diameter
ST PAN 1/3	Third-Size Stainless Steel Pan – 12 ³ / ₄ "W x 6 ⁷ / ₈ "D x 2 ¹ / ₂ "H
ST PAN 1/2	Half-Size Stainless Steel Pan – 12 ³ / ₄ "W x 10 ³ / ₈ "D x 2 ¹ / ₂ "H
ST PAN 2	Full-Size Stainless Steel Pan – 12 ³ / ₄ "W x 20 ³ / ₄ "D x 2 ¹ / ₂ "H
ST PAN 4	Full-Size Stainless Steel Pan – 12 ³ /4"W x 20 ³ /4"D x 4"H
TRIVETS	




Model


Description

Wire Trivets Stainless -TRIVET (1/2)SS TRIVET SS

Half-Size - 103/16"W x 75/8"D Full-Size - 101/8"W x 18"D

Paint Chip and Stone Sample Colors

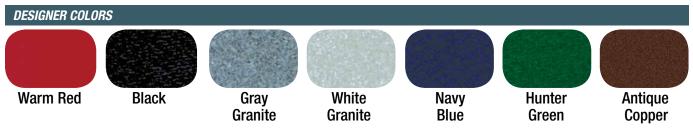

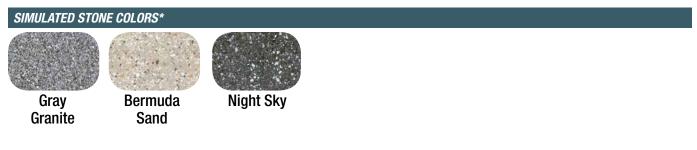

Colors are a representation and may not exactly match our colors. Consult factory for possible color matching options on these colors. Non-standard colors are non-returnable.

To order a Hatco Paint Chip & Stone Sample Colors Sheet, visit www.hatcocorp.com / Order Literature / Sales Literature / Sell Sheets.

* Simulated Stone is Swanstone®



Hatco Corporation P.O. BOX 340500 | Milwaukee, WI 53234-0500 USA 800-558-0607 | 414-671-6350 www.hatcocorp.com | support@hatcocorp.com