



# Drop-In 4/3-Size Heated Wells — UR, C-UR Fabricator Components

- Models: HWBLRT-43, -43D  
 HWBLRN-43, 43D  
 HWBRT-43, 43D  
 HWBRN-43, -43D  
 HWBHRT-43, -43D  
 HWBHRN-43, -43D

Hatco's Drop-In 4/3-Sized Heated Wells are recognized as having UL components that hold hot food products at safe serving temperatures, plus have the added benefit of allowing fabricators the freedom to design their own steam tables. Like the full-size models, Hatco units offer a larger drain, more consistent holding temperatures, heavier stainless steel construction, easier-to-service design for quick change of components, and a remote thermostat with separate power switch.

## Standard features


- Rectangular Uninsulated 4/3-Size Heated Well (Top mount only)
- Thermostatic controls feature a separate lighted ON/OFF rocker switch and temperature dial, allowing preset temperatures to be maintained
- Thermostatic or infinite (not available on 120V High Watt) controls available
- Without conduit and control box enclosure
- Available with or without a drain
- 50% larger drain with flat screen simplifies cleaning and holds pans level
- Low (120V only), Standard and High Watt
- Thicker stainless steel construction and solid brazed joints for durability
- Easy service access to elements or thermostats

\*Fabricator will need to obtain UL approvals.

Project \_\_\_\_\_

Item # \_\_\_\_\_

Quantity \_\_\_\_\_

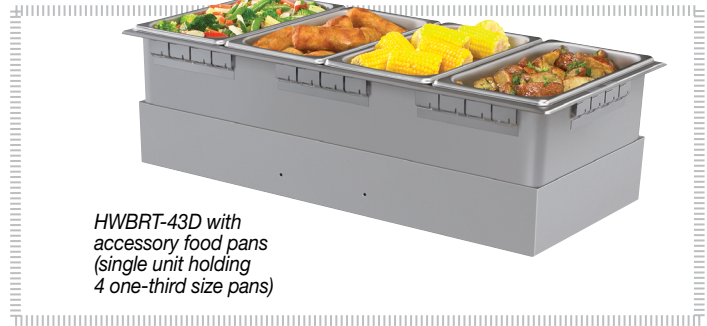

*HWBRT-43D with accessory food pans (single unit holding 4 one-third size pans)*

## Options (available at time of purchase only)

- Additional Power Supply Lead Wire in 1' (305 mm) increments for "RN" (Infinite Control) Components (Lead Wire only - Conduit not included)
- Thermostat with 6' Capillary for RT Components (Thermostat and Lead Wire only - Conduit not included)

## Accessories

Rectangular Full-Size Stainless Steel Food Pans:

- Third-Size (2.5" [64 mm] H)
- Half-Size (2.5" [64 mm] H)
- Full-Size (2.5" [64 mm] H)
- Full-Size (4" [101 mm] H)
- Full-Size (6" [152 mm] H)

Round Food Pans:

- 11-Quart (10-Liter)

Hinged Lid for Round Pans:

- 11-Quart (10-Liter)

Notched Lid for Round Pans:

- 11-Quart (10-Liter)

Stainless Steel Wire Trivets:

- Half-Size
- Full-Size

Adapter to convert warmers to hold Round Pans which holds two 11-Quart (10-Liter) Inserts

Support Bars:

- 12" (305 mm)

Mounting Kit for combustible countertops

3/4" Ball Valve for unit with Drains

3/4" Gate Valve for unit with Drains

Heated Well Remote Handle for 3/4" Drains (requires a Ball or Gate Valve)



For operation, location and safety information, please refer to the Installation and Operating Manual.



HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Patents](#) | [Chat](#)



# Drop-In 4/3-Size Heated Wells – UR, C-UR Fabricator Components


Models\*: HWBL-43, -43D, HWB-43, -43D, HWBH-43, -43D

\*"RT" added to model name indicates unit with thermostat control, lit rocker switch and 36" (914 mm) capillary (ex. HWBRT-43).  
 "RN" added to model name indicates unit with infinite switch control, pilot light and 36" (914 mm) lead (ex. HWBRN-43).


## Ordering Instructions *(Please specify the following with each order)*

1. **Desired Voltage:** 120, 208, 240V  
(export voltage available)
2. **Base Size of Heated Well**  
A. 4/3 Rectangular:  
12" x 27" (305 x 686 mm)
3. **Drain** (with or without)
4. **Wattage**  
A. High Watt  
B. Standard Watt  
C. Low Watt (120V only)
5. **Agency:**  
A. UR and C-UR (UL recognized – Conduit and control enclosures not included). Fabricators will need to obtain UL approvals

## HWB-43-UR Series

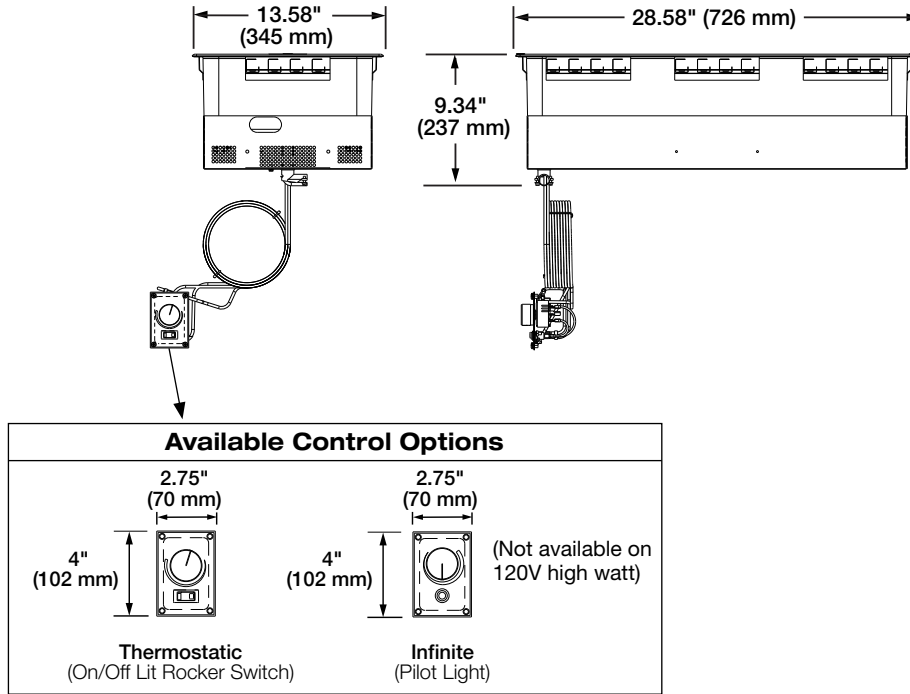


Non-Combustible  
Countertop  
Opening  
("Rectangular"  
cut-out)



### Cutout Dimensions for Non-Combustible Countertops

Model	Minimum Width (A)	Maximum Width (A)	Minimum Depth (B)	Maximum Depth (B)
HWB-, HWBI-43 Series	12.69" (323 mm)	12.94" (328 mm)	27.69" (704 mm)	28.00" (711 mm)

Combustible  
Countertop  
Opening  
("Rectangular"  
cut-out)




### Cutout Dimensions for Combustible Countertops ▲

Model	Minimum Width (A)	Maximum Width (A)	Minimum Depth (B)	Maximum Depth (B)
HWB-, HWBI-43 Series	14.00" (356 mm)	14.25" (362 mm)	29.00" (737 mm)	29.25" (742 mm)

▲ Accessory Mounting Kit required for Top Mounts

Control Box Opening



### Cutout Dimensions for Control Boxes

Control Box	Width (A)	Height (B)
T-Stat Control	2.125" (54 mm)	3.375" (86 mm)
Infinite Switch	2.125" (54 mm)	3.375" (86 mm)

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com) | [support@hatcocorp.com](mailto:support@hatcocorp.com) | [Find a Hatco Rep](#) | [Image Library](#) | [Document Library](#) | [Patents](#) | [Chat](#)



# Drop-In 4/3-Size Heated Wells — UR, C-UR Fabricator Components

Models\*: HWBL-43, -43D, HWB-43, -43D, HWBH-43, -43D

\*"RT" added to model name indicates unit with thermostat control, lit rocker switch and 36" (914 mm) capillary (ex. HWBRT-43).  
 "RN" added to model name indicates unit with infinite switch control, pilot light and 36" (914 mm) lead (ex. HWBRN-43).

## Drop-In 4/3-Size Models — UR, C-UR Fabricator Components

The shaded areas contain electrical information for International models only

	Model*	Dimensions (Width x Depth x Height)	Volts*	Watts	Amps	Optional Control Configuration		Approx. Ship Weight
Low Watt	HWBLRT-43 HWBLRT-43D HWBLRN-43 HWBLRN-43D	13.58" x 28.58" x 9.34" (345 x 726 x 237 mm)	120	750	6.3	Thermostatic (ON/OFF lit rocker switch)	Infinite (control with pilot light)	30 lbs. (14 kg)
	33 lbs. (15 kg)							
	21 lbs. (10 kg)							
	33 lbs. (15 kg)							
Standard Watt	HWBRT-43 HWBRT-43D HWBRN-43 HWBRN-43D	13.58" x 28.58" x 9.34" (345 x 726 x 237 mm)	120	1200	10.0	Thermostatic (ON/OFF lit rocker switch)	Infinite (control with pilot light)	23 lbs. (11 kg)
			208		5.8			21 lbs. (10 kg)
			240		5.0			21 lbs. (10 kg)
			220		5.5			21 lbs. (10 kg)
			240		5.0			21 lbs. (10 kg)
High Watt	HWBHRT-43 HWBHRT-43D HWBHRN-43↗ HWBHRN-43D↗	13.58" x 28.58" x 9.34" (345 x 726 x 237 mm)	120	1650	13.8	Thermostatic (ON/OFF lit rocker switch)	Infinite (control with pilot light)	30 lbs. (14 kg)
			208		7.9			21 lbs. (10 kg)
			240		6.9			30 lbs. (14 kg)
			220		7.5			33 lbs. (15 kg)
			240		6.9			33 lbs. (15 kg)

↗208 or 240V only.

\*"RT" added to model name indicates unit with thermostat control, lit rocker switch and 36" (914 mm) or 72" (1829 mm) capillary.

"RN" added to model name indicates unit with infinite switch control, pilot light and 36" leads.

\*CE Mark not available.

## PRODUCT SPECS

### Drop-In 4/3-Size Heated Wells

The Drop-In 4/3-Size Heated Well – UR, C-UR Fabricator Components shall be a Model ...as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Drop-In 4/3-Size Heated Well shall be rated at ...watts, ...volts, and be... inches (millimeters) in overall width and be ...inches (millimeters) in overall depth. It shall consist of stainless and aluminized steel housing with a metal sheathed heating

element, EZ locking hardware for installation, and a remote thermostat with lighted power switch. Models with a drain consist of a 3/4" NPT drain.

Warranty consists of 24/7 parts and service assistance (US and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



[www.hatcocorp.com](http://www.hatcocorp.com)

[support@hatcocorp.com](mailto:support@hatcocorp.com)

[Find a Hatco Rep](#)

[Image Library](#)

[Document Library](#)

[Patents](#)

[Chat](#)