

Glo-Ray 2-Go® **Heated Shelves**

Models: GRS2G-3920-2, -3, -4, -5

The Hatco Glo-Ray 2-Go® Heated Shelves are designed specifically for your delivery and carry-out needs in mind. Capable of holding a great quantity of hot food items at optimum serving temperatures, the GRS2G models hold bags and boxes up to 30 minutes with a high temperature range of up to 200°F (93°C).

Standard features

- A great solution to handling pick-up, third-party delivery or any food to-go situation
- Shelves are 20" (508 mm) deep and 39" (991 mm) wide, large enough for pizza boxes and bags, which will easily fit into the 13" (330 mm) clearance of each shelf
- Touchscreen control with digital read out indicates separate heat and timer for each shelf
- Standard units feature shelves with heated bases that are thermostatically-controlled and have a stainless steel frame
- The cord is recessed into the bottom shelf at a 45° angle, allowing the unit to be flush against either wall



- Optional side and back panels are one panel per shelf, giving you the flexibility to customize your unit. Keep some off for pass-through capabilities and leave some on for single-sided
- Place in a wall opening for a built-in feel, and benefit from the pass-through features
- Unit comes with side wall anchor brackets for improved stability, 6" (152 mm) adjustable flanged feet that can be bolted to the floor and a 6' (1829 mm) recessed cord and plug

Project .			
Item # _			



Options (available at time of purchase only)

Designer Colors - -Non-standard colors are non-returnable – Stainless Steel standard – ☐ Warm Red □Black ☐ Gray Granite ☐ White Granite ☐ Antique Copper ☐ Navy Blue ☐ Hunter Green ☐ Controls and permanent panel on customers right side Side panels - will be same color as unit -□2-shelf ☐3-shelf ☐ 4-shelf □5-shelf Back panels - will be same color as unit -□2-shelf ☐3-shelf ☐4-shelf □5-shelf

Accessories

□4" (102 mm) Adjustable Legs (GRS3G-3920-2 and GRS2G-3920-3 models only)

"IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.



For operation, location and safety information, please refer to the Installation and Operating Manual.








Page 1 of 2



Glo-Ray 2-Go® Heated Shelves Models: GRS2G-3920-2, -3, -4, -5

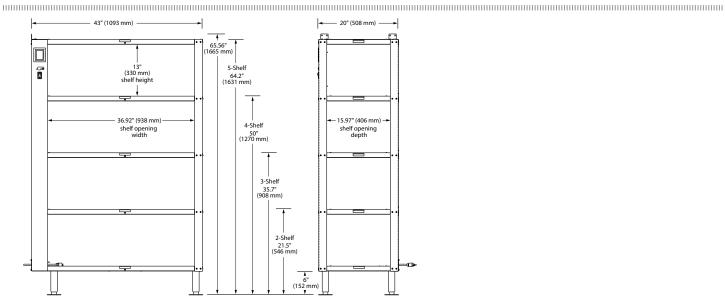

Front View

Side View

SPECIFICATIONS Glo-Ray 2-Go® Heated Shelves

The shaded areas contain electrical information for International models

Model	Description	Dimensions (W x D x H [‡])	Volts	Watts	Amps	Plug	Approx. Ship Weight
GRS2G-3920-2		43" x 20" x 21.5" (1093 x 508 x 546 mm)	120	704	5.6	NEMA 5-15P	150 lbs. (69 kg)
	0 -11		220	644	2.9	BS-1363, CEE 7/7 Schuko	
	2 shelves		230	704	3.1	BS-1363, CEE 7/7 Schuko	
			240	766	3.2	BS-1363, AS-3112, CEE 7/7 Schuko	
GRS2G-3920-3		43" x 20" x 35.7" (1093 x 508 x 908 mm)	120	1055	8.8	NEMA 5-15P	- 175 lbs. (80 kg)
	2 abolyon		220	965	4.4	BS-1363, CEE 7/7 Schuko	
	3 shelves		230	1055	4.6	BS-1363, CEE 7/7 Schuko	
			240	1148	4.8	BS-1363, AS-3112, CEE 7/7 Schuko	
GRS2G-3920-4	4 shelves	43" x 20" x 50" (1093 x 508 x 1270 mm)	120	1406	11.7	NEMA 5-15P	200 lbs. (91 kg)
			220	1285	5.8	BS-1363, CEE 7/7 Schuko	
			230	1406	6.1	BS-1363, CEE 7/7 Schuko	
			240	1529	6.4	BS-1363, AS-3112, CEE 7/7 Schuko	
GRS2G-3920-5	5 shelves	43" x 20" x 64.2" (1093 x 508 x 1631 mm)	120	1757	14.6	NEMA 5-15P*	225 lbs. (103 kg)
			220	1607	7.3	BS-1363, CEE 7/7 Schuko	
			230	1757	7.6	BS-1363, CEE 7/7 Schuko	
			240	1912	8.0	BS-1363, AS-3112, CEE 7/7 Schuko	

[‡] Height does not include 1.35" side wall mounting brackets.

CORD LOCATION

Server side, bottom corner - is an 45° recessed cord.

PLUG CONFIGURATIONS

NEMA 5-15P NEMA 5-20P





AS 3112



CEE 7/7 Schuko

PRODUCT SPECS Glo-Ray 2-Go® Heated Shelves

The Heated Shelves shall be a Glo-Ray 2-Go® Model ..., rated at ... volts, and ... watts, by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The shelves shall consist of thermostatically-controlled heated base, touchscreen controls with separate heat and timer for each shelf and a 6' (1829 mm) recessed cord with plug attached.

Accessories shall include side and back panels.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350



www.hatcocorp.com | support@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library | Patents | Chat

Form No. GRS2G Spec Sheet Page 2 of 2 May 2023

^{*}Canadian models use NEMA 5-20P.